

Developer Guide: iOS Object API

Applications

SAP Mobile Platform 2.3 SP03

DOCUMENT ID: DC01907-01-0233-01

LAST REVISED: September 2013

Copyright © 2013 by Sybase, Inc. All rights reserved.

This publication pertains to Sybase software and to any subsequent release until otherwise indicated in new editions or technical notes. Information in this document is subject to change without notice. The software described herein is furnished under a license agreement, and it may be used or copied only in accordance with the terms of that agreement.

Upgrades are provided only at regularly scheduled software release dates. No part of this publication may be reproduced, transmitted, or translated in any form or by any means, electronic, mechanical, manual, optical, or otherwise, without the prior written permission of Sybase, Inc.

Sybase trademarks can be viewed at the Sybase trademarks page at http://www.sybase.com/detail?id=1011207. Sybase and the marks listed are trademarks of Sybase, Inc. (a) indicates registration in the United States of America.

SAP and other SAP products and services mentioned herein as well as their respective logos are trademarks or registered trademarks of SAP AG in Germany and in several other countries all over the world.

Java and all Java-based marks are trademarks or registered trademarks of Oracle and/or its affiliates in the U.S. and other countries.

Unicode and the Unicode Logo are registered trademarks of Unicode, Inc.

All other company and product names mentioned may be trademarks of the respective companies with which they are associated

Use, duplication, or disclosure by the government is subject to the restrictions set forth in subparagraph (c)(1)(ii) of DFARS 52.227-7013 for the DOD and as set forth in FAR 52.227-19(a)-(d) for civilian agencies.

Sybase, Inc., One Sybase Drive, Dublin, CA 94568.

Contents

Getting Started with iOS Development	1
Object API Applications	
Best Uses for Object API Applications	2
Cache Synchronization	2
Client Runtime Architecture	3
Documentation Roadmap for SAP Mobile Platform	4
Development Task Flow for Object API Applications	5
Installing the iOS Development Environment	6
Downloading the Xcode IDE	6
Downloading Older Versions of the Xcode IDE	6
Installing X.509 Certificates on iOS Clients	6
Generating Objective-C Object API Code	6
Generating Objective-C Object API Code Using	
SAP Mobile WorkSpace	7
Generating Object API Code Using the Code	
Generation Utility	.12
Generated Code Location and Contents	.13
Validating Generated Code	.14
Creating a Project	.14
Generating HeaderDoc from Generated Code	.14
Downloading the Latest Afaria Libraries	.15
Importing Libraries and Code	.15
Importing Libraries and Code for Applications	
Enabled with ARC	
Managing the Background State	.22
Development Task Flow for DOE-based Object API	
Applications	
Installing the iOS Development Environment	
Downloading the Xcode IDE	
Downloading Older Versions of the Xcode IDE	
Installing X.509 Certificates on iOS Clients	.26

Generating Objective-C Object API Code	.26
Generated Code Location and Contents	
Creating a Project	.28
Generating HeaderDoc from Generated Code	
Downloading the Latest Afaria Libraries	.28
Importing Libraries and Code	
Importing Libraries and Code for Applications	
Enabled with ARC	.32
Managing the Background State	
Developing the Application Using the Object API	
Initializing an Application	
Initially Starting an Application	
Subsequently Starting an Application	
Accessing MBO Data	
Object Queries	.50
Dynamic Queries	.50
MBOs with Complex Types	
Relationships	.51
Manipulating Data	
Creating, Updating, and Deleting MBO Records	
	.53
Other Operations	.54
Using submitPending and	
submitPendingOperations	.54
Shutting Down the Application	.55
Closing Connections	.55
Debugging Runtime Errors and Performance Analysis	
	.56
End to End Tracing	.56
Tracking KPI	.58
Uninstalling the Application	.59
Deleting the Database and Unregistering the	
Application	.59
Recovering From SAP Mobile Server Failures	.59
Client Application Recovery Examples	.60

Testing Applications	77
Testing an Application Using a Emulator	77
Client-Side Debugging	
Server-Side Debugging	
Improve Synchronization Performance by Reducing	
the Log Record Size	80
Determining the Log Record Size	81
Reducing the Log Record Size	
Localizing Applications	
Localizing Menus and Interfaces	
Localizing Embedded Strings	
Validating Localization Changes	
Packaging Applications	
Signing	
Apple Push Notification Service Configuration	89
Preparing an Application for Apple Push	
Notification Service	89
Configuring Apple Push Notification Service	
Preparing Applications for Deployment to the	
Enterprise	93
Client Object API Usage	
Client Object API Reference	
Application APIs	
Application	
ConnectionProperties	
ApplicationSettings	
ConnectionPropertyType	
Afaria APIs	
Using Afaria to Provision Configuration Data	
Using Certificates from Afaria for Authentication	
Connection APIs	
SUPConnectionProfile	
Set Database File Property	
Synchronization Profile	

Connect the Data Synchronization Channel	
Through a Relay Server	136
Authentication APIs	
Logging In	
Importing an X.509 Certificate to an iOS Client	t
from the SAP Mobile Server	
Sample Code: Setting Up Login Credentials	138
Sample Code: Mutual Authentication	
Single Sign-On With X.509 Certificate Related	
Object API	
Personalization APIs	
Type of Personalization Keys	145
Getting and Setting Personalization Key Value	S
Synchronization APIs	
Managing Synchronization Parameters	146
Performing Mobile Business Object	
Synchronization	147
Message-Based Synchronization APIs	147
Push Synchronization Applications	152
Resumable Synchronization	153
Log Record APIs	161
SUPLogRecord API	161
Logger APIs	164
Log Level and Tracing APIs	165
Change Log API	166
entityType	166
operationType	167
rootEntityType	167
rootSurrogateKey	168
surrogateKey	169
Methods in the Generated Database Class	169
Code Samples	171
Security APIs	172
Encrypting the Client Database	172

Accessing a Previously Encrypted Database	.172
SUPDataVault	.172
Callback and Listener APIs	.190
Callback Handler API	.191
SUPApplicationCallback API	.194
Apple Push Notification API	
SUPSyncStatusListener API	
Query APIs	
Retrieving Data from Mobile Business Objects.	
Retrieving Relationship Data	.208
Persistence APIs	
Operations APIs	.209
Object State APIs	
Generated Package Database APIs	.218
Large Attribute APIs	.219
MetaData API	.229
MetaData API	.229
SUPDatabaseMetaDataRBS	. 229
SUPClassMetaDataRBS	.229
EntityMetaData	.230
SUPAttributeMetaData	.230
Exceptions	.230
Exception Handling	.230
Exception Classes	.236
Error Codes	.237
Index	.241

Contents

viii SAP Mobile Platform

Getting Started with iOS Development

Use advanced SAP® Mobile Platform features to create applications for iOS devices. The audience is advanced developers who may be new to SAP Mobile Platform.

This guide describes requirements for developing a device application for the platform, how to generate application code, and how to customize the generated code using the Client Object API. Also included are task flows for the development options, procedures for setting up the development environment, and Client Object API documentation.

Companion guides include:

- SAP Mobile WorkSpace Mobile Business Object Development
- Supported Hardware and Software
- *Tutorial: iOS Application Development*, where you create the SMP101 sample project referenced in this guide.
 - Complete the tutorials to gain a better understanding of SAP Mobile Platform components and the development process.
- Troubleshooting.
- The iOS HeaderDoc provides a complete reference to the APIs:
 - The Framework Library HeaderDoc is installed to SMP_HOME \MobileSDK23\ObjectAPI\iOS\headerdoc. For example, C:\SAP\MobilePlatform\MobileSDK23\ObjectAPI\iOS\headerdoc.
 - You can generate HeaderDoc from the generated Objective-C code. See http://developer.apple.com/mac/library/navigation/index.html.
- Fundamentals contains high-level mobile computing concepts, and a description of how SAP Mobile Platform implements the concepts in your enterprise.
- Developer Guide: Migrating to SAP Mobile SDK contains information for developers who are migrating device applications to a newer software version, and changes to MBOs, projects, and the SAP Mobile Server.

Object API Applications

Object API applications are customized, full-featured mobile applications that use mobile data model packages, either using mobile business objects (MBOs) or Data Orchestration Engine, to facilitate connection with a variety of enterprise systems and leverage synchronization to support offline capabilities.

The Object API application model enables developers to write custom code — C#, Java, or Objective-C, depending on the target device platform — to create device applications.

Development of Object API applications provides the most flexibility in terms of leveraging platform specific services, but each application must be provisioned individually after being compiled, even for minor changes or updates.

Development involves both server-side and client-side components. SAP Mobile Server brokers data synchronization and transaction processing between the server and the client components.

- Server-side components address the interaction between the enterprise information system (EIS) data source and the data cache. EIS data subsets and business logic are encapsulated in artifacts, called mobile business object packages, that are deployed to the SAP Mobile Server.
- Client-side components are built into the mobile application and address the interaction between the data cache and the mobile device data store. This can include synchronizing data with the server, offline data access capabilities, and data change notification.

These applications:

- Allow users to connect to data from a variety of EIS systems, including SAP® systems.
- Build in more complex data handling and logic.
- Leverage data synchronization to optimize and balance device response time and need for real-time data.
- Ensure secure and reliable transport of data.

Best Uses for Object API Applications

Synchronization applications provide operation replay between the mobile device, the middleware, and the back-end system. Custom native applications are designed and built to suit specific business scenarios from the ground up, or start with a bespoke application and be adapted with a large degree of customization.

Cache Synchronization

Cache synchronization allows mapping mobile data to SAP Remote Function Calls (RFCs) using Java Connector (JCO) and to other non-SAP data sources such as databases and Web services. When SAP Mobile Platform is used in a stand-alone manner for data synchronization (without Data Orchestration Engine), it utilizes an efficient bulk transfer and data insertion technology between the middleware cache and the device database.

In an SAP Mobile Platform standalone deployment, the mobile application is designed such that the developer specifies how to load data from the back end into the cache and then filters and downloads cache data using device-supplied parameters. The mobile content model and the mapping to the back end are directly integrated.

This style of coupling between device and back-end queries implies that the back end must be able to respond to requests from the middleware based on user-supplied parameters and serve up mobile data appropriately. Normally, some mobile-specific adaptation is required within

SAP Business Application Programming Interfaces (BAPI). Because of the direct nature of application parameter mapping and RBS protocol efficiencies, SAP Mobile Platform cache synchronization deployment is ideal:

- With large payloads to devices (may be due to mostly disconnected scenarios)
- Where ad hoc data downloads might be expected
- For SAP® or non-SAP back ends

Large payloads, for example, can occur in task worker (service) applications that must access large product catalogs, or where service occurs in remote locations and workers might synchronize once a day. While SAP Mobile Platform synchronization does benefit from middleware caching, direct coupling requires the back end to support an adaptation where mobile user data can be determined.

Client Runtime Architecture

The goal of synchronization is to keep views (that is, the state) of data consistent among multiple tiers. The assumption is that if data changes on one tier (for example, the enterprise system of record), all other tiers interested in that data (mobile devices, intermediate staging areas/caches and so on) are eventually synchronized to have the same data/state on that system.

The SAP Mobile Server synchronizes data between the device and the back-end by maintaining records of device synchronization activity in its cache database along with any cached data that may have been retrieved from the back-end or pushed from the device. The SAP Mobile Server employs several components in the synchronization chain.

Mobile Channel Interfaces

Two main channel interfaces provide notifications and data transport to and from remote devices.

 The messaging channel serves as the abstraction to all device-side notifications (BlackBerry Enterprise Service, Apple Push Notification Service, and others) so that when changes to back-end data occur, devices can be notified of changes relevant for their application and configuration.

The messaging channel sends these types of communications:

- Application registration the messaging channel is used for application registration before establishing a connection to the SAP Mobile Server.
- Change notifications when the SAP Mobile Server detects changes in the back-end EIS, the SAP Mobile Server can send a notification to the device. By default, sending change notifications is disabled, but you can enable sending change notifications per synchronization group.

To capture change notifications, you can register an onSynchronize callback. The synchronization context in the callback has a status you can retrieve.

- Operation replay records when synchronizing, these records are sent to the SAP
 Mobile Server and the messaging channel sends a notification of replayFinished.
 The application must call another synchronize method to retrieve the result.
- SAP Data Orchestration Engine (DOE) application synchronization the messaging channel is used for synchronization for DOE applications.
- The synchronization channel sends data to keep the SAP Mobile Server and client synchronized. The synchronization is bi-directional.

Mobile Middleware Services

Mobile middleware services (MMS) arbitrate and manage communications between device requests from the mobile channel interfaces in the form that is suitable for transformation to a common MBO service request and a canonical form of enterprise data supplied by the data services.

Data Services

Data services is the conduit to enterprise data and operations within the firewall or hosted in the cloud. Data services and mobile middleware services together manage the cache database (CDB) where data is cached as it is synchronized with client devices.

Once a mobile application model is designed, it can be deployed to the SAP Mobile Server where it operates as part of a specialized container-managed package interfacing with the mobile middleware services and data services components. Cache data and messages persist in the databases in the data tier. Changes made on the device are passed to the mobile middleware services component as an operation replay and replayed against the data services interfaces with the EIS. Data that changes on the EIS as a result of device changes, or those originating elsewhere, are replicated to the device database.

Documentation Roadmap for SAP Mobile Platform

SAP® Mobile Platform documents are available for administrative and mobile development user roles. Some administrative documents are also used in the development and test environment; some documents are used by all users.


See *Documentation Roadmap* in *Fundamentals* for document descriptions by user role.

Check the Product Documentation Web site regularly for updates: http://sybooks.sybase.com/sybooks/sybooks.xhtml?id=1289&c=firsttab&a=0&p=categories, then navigate to the most current version.

Development Task Flow for Object API Applications

Describes the overall development task flow for Object API applications, and provides information and procedures for setting up the development environment, and developing device applications.

This diagram illustrates how you can develop a device application directly from mobile business objects (MBOs), using the Object API and custom device application coding. This is how you create device applications with sophisticated UI interaction, validation, business logic, and performance.

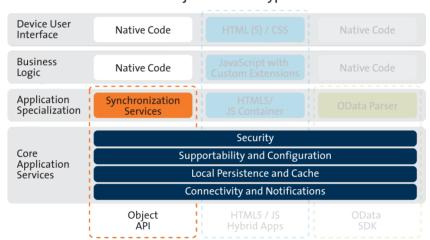

Object API Archetype

The Object API provides the core application services described in the diagram.

The Authentication APIs provide security by authenticating the client to the SAP Mobile Server.

The Synchronization APIs allow you to synchronize mobile business objects (MBOs) based on synchronization parameters, for individual MBOs, or as a group, based on the group's synchronization policy.

The Application and Connection APIs allow clients to register with and connect to the SAP Mobile Server. The Callback Handler and Listener APIs, and the Target Change Notification APIs provide notifications to the client on operation success or failure, or changes in data.

Installing the iOS Development Environment

Install the iOS development environment, and prepare iOS devices for authentication.

Downloading the Xcode IDE

Download and install Xcode.

- 1. Download Xcode from the Apple Web site: http://developer.apple.com/xcode/.
- **2.** Complete the Xcode installation following the instructions in the installer.

Downloading Older Versions of the Xcode IDE

If you do not have the supported version of Xcode and the iOS SDK, you need to download it from the Downloads for Apple Developers Web site.

See *Supported Hardware and Software* for the most current version information for mobile device platforms and third-party development environments. If necessary, you can download older versions.

- 1. Go to http://developer.apple.com/downloads/.
 - You must be a paying member of the iOS Developer Program. Free members do not have access to the supported version.
- 2. Log in using your Apple Developer credentials.
- **3.** (Optional) Deselect all Categories except Developer Tools to narrow the search scope.
- **4.** Download the supported Xcode and SDK combination.

Installing X.509 Certificates on iOS Clients

Install generated X.509 certificates and test them in your iOS clients. A certificate provides an additional level of secure access to an application, and may be required by an organization's security policy.

Generating Objective-C Object API Code

Generate object API code containing mobile business object (MBO) references, which allows you to use APIs to develop device applications for Apple devices. You can generate code either in SAP Mobile WorkSpace, or by using a command line utility for generating code.

Generated code can be used to leverage SAP Mobile Platform capabilities and services, and access MBO-related data: calling the mobile business object operations, object queries, and so on. This code can then be imported into an integrated development environment (IDE) of your choice to create the device application (define the user interface, application logic, and so on.

Generating Objective-C Object API Code Using SAP Mobile WorkSpace

Use SAP Mobile WorkSpace to generate object API code containing mobile business object (MBO) references.

Prerequisites

Develop the MBOs that will be referenced in the device applications you are developing. A mobile application project must contain at least one non-online MBO. You must have an active connection to the datasources to which the MBOs are bound.

Task

SAP Mobile Platform provides the Code Generation wizard for generating object API code. Code generation creates the business logic, attributes, and operations for your mobile business object.

1. Launch the Code Generation wizard.

From	Action
Mobile Application Diagram	Right-click within the Mobile Application Diagram and select Generate Code .
WorkSpace Navigator	Right-click the Mobile Application project folder that contains the mobile objects for which you are generating API code, and select Generate Code .

2. (Optional; this page of the code generation wizard is seen only if you are using the Advanced developer profile). Enter the information for these options, then click **Next**:

Option	Description
Code generation configuration	 A table lists all existing named configurations plus the most recently used configuration. You can select any of these, click Next, and proceed. Additionally, you can: Create new configuration – click Add and enter the Name and optional Description of the new configuration and click OK to save the configuration for future sessions. You can also select Copy from to copy an existing configuration which can then be modified. Most recent configuration – if you click Next the first time you generate code without creating a configuration, the configuration is saved and displays as the chosen configuration the next time you invoke the code generation wizard. If the most recent configuration used is a named configuration, it is saved as the first item in the configuration table, and also "Most recent configuration", even though it is still listed as the original named configuration.

3. Click Next.

4. In Select Mobile Objects, select all the MBOs in the mobile application project or select MBOs under a specific synchronization group, whose references, metadata, and dependencies (referenced MBOs) are included in the generated device code.

Dependent MBOs are automatically added (or removed) from the Dependencies section depending on your selections.

SAP Mobile WorkSpace automatically computes the default page size after you choose the MBOs based on total attribute size. If an MBO's accumulated attribute size is larger than the page size setting, a warning displays.

5. Enter the information for these configuration options:

Option	Description
Language	Select Objective C.
Platform	Select the platform (target device) for which the device client code is intended. • Objective C • iOS
SAP Mobile Server	Specify a default SAP Mobile Server connection profile to which the generated code connects at runtime.
Server domain	Choose the domain to which the generated code will connect. If you specified an SAP Mobile Server to which you previously connected successfully, the first domain in the list is chosen by default. You can enter a different domain manually. Note: This field is only enabled when an SAP Mobile Server is selected.

Option	Description
Page size	(Optional) Select the page size for the generated client code. If the page size is not set, the default page size is 4KB at runtime. The default is a proposed page size based on the selected MBO's attributes.
	The page size should be larger than the sum of all attribute lengths for any MBO that is included with all the MBOs selected, and must be valid for the database. If the page size is changed, but does not meet these guidelines, object queries that use string or binary attributes with a WHERE clause may fail. See MBO Attributes in Mobile Data Models: Using Mobile Business Objects for more information.
	A binary length greater than 32767 is converted to a binary large object (BLOB), and is not included in the sum; a string greater than 8191 is converted to a character large object (CLOB), and is also not included). If an MBO attribute's length sum is greater than the page size, some attributes automatically convert to BLOB or CLOB, and therefore cannot be put into a WHERE clause.
	Note: This field is only enabled when an SAP Mobile Server is selected.
Destination	Specify the destination of the generated device client files. Enter (or Browse) to either a Project path (Mobile Application project) location or File system path location. Select Clean up destination before code generation to clean up the destination folder before generating the device client files.

6. Select **Including object manager classes** to generate both the metadata for the attributes and operations of each generated client object and an object manager for the generated metadata.


The **Including object manager classes** option is enabled only for BlackBerry and C# if you select **Generate metadata classes**. The object manager allows you to retrieve the metadata of packages, MBOs, attributes, operations, and parameters during runtime using the name instead of the object instance.

Note: When generating code for iOS, "Generate metadata classes" is automatically selected and cannot be unselected. The "Including object manager classes" option is unavailable and unsupported.

7. Click Finish.

By default, the MBO source code and supporting documentation are generated in the project's Generated Code folder. The generated files are located in the <MBO_project_name> folder under the includes and src folders. The includes folder contains the header (*.h) files and the src folder contains the implementation (*.m) files.

Because there is no namespace concept in Objective-C, all generated code is prefixed with packagename. For example, "SMP101".

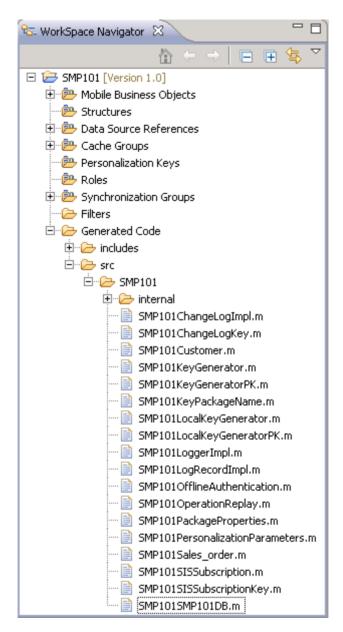

The frequently used Objective-C files in this project, described in code samples include:

 Table 1. Source Code File Descriptions

Objective-C File	Description
MBO class (for example, SMP101Customer.h, SMP101Customer.m)	Include all the attributes, operations, object queries, and so on, defined in this MBO.
synchronization parameter class (for example, SMP101CustomerSynchronization-Parameter.h, SMP101Customer-SynchronizationParameter.m)	Include any synchronization parameters defined in this MBO.
Key generator classes (for example, SMP101KeyGenerator.h, SMP101KeyGenerator.m)	Include generation of surrogate keys used to identify and track MBO instances and data.
Personalization parameter classes (for example, SMP101PersonalizationParameters.h, SMP101PersonalizationParameters.m)	Include any defined personalization keys.

Note: Do not modify generated MBO API generated code directly. For MBO generated code, create a layer on top of the MBOs using patterns native to the mobile operating system development to extend and add functionality.

- **8.** Examine the generated code location and contents.
- **9.** Validate the generated code.

Generating Object API Code Using the Code Generation Utility

Use the Code Generation Utility to generate object API code containing mobile business object (MBO) references. This method of generating code allows you to automate the process of code generation, for example through the use of scripts.

Prerequisites

- Use SAP Mobile WorkSpace to develop and package your mobile business objects. See SAP Mobile WorkSpace - Mobile Business Object Development > Develop > Developing a Mobile Business Object.
- Deploy the package to the SAP Mobile Server, creating files required for code generation from the command line. See SAP Mobile WorkSpace Mobile Business Object Development > Develop > Packaging and Deploying Mobile Business Objects > Automated Deployment of SAP Mobile WorkSpace Projects.

Task

1. Locate <domain name>_package.jar in your mobile project folder. For the SMP101 example, the project is deployed to the default domain, and the deploy jar file is in

```
the following location: SMP101\Deployment\.pkg.profile \My SAP Mobile Server\default package.jar.
```

- 2. Make sure that the JAR file contains this file:
 - deployment unit.xml
- **3.** Use a utility to extract the deployment unit.xml file to another location.
- **4.** From SMP_HOME\MobileSDK23\ObjectAPI\Utils\bin, run the codegen.bat utility, specifying the following parameters:

```
codegen.bat -oc -client -ul -mdp deployment_unit.xml [-output
<output dir>][-pageSize <page size in bytes>] [-doc]
```

- The -output parameter allows you to specify an output directory. If you omit this parameter, the output goes into the SMP_HOME\MobileSDK23\ObjectAPI\Utils\genfiles directory, assuming codegen.bat is run from the SMP_HOME\MobileSDK23\ObjectAPI\Utils\genfiles directory.
- The -doc parameter specifies that documentation is generated for the generated code.
- The case sensitive -pageSize parameter is optional and specifies the page size generated in the client code. Valid values are 1024, 2048, 4096, 8192, and 16384.

Ignore these warnings:

```
log4j:WARN No appenders could be found for logger ... log4j:WARN Please initialize the log4j system properly.
```

Generated Code Location and Contents

If you generated code in SAP Mobile WorkSpace, generated object API code is stored by default in the "Destination" location you specified during code generation. If you generated code with the Code Generation Utility, generated object API code is stored in the SMP_HOME \MobileSDK23\ObjectAPI\Utils\genfiles folder after you generate code.

The contents of the folder is determined by the options you selected in the Generate Code wizard in SAP Mobile WorkSpace, or specified in the Code Generation Utility. The contents include generated class (.h, .m) files that contain:

- MBO class which handles persistence and operation replay of your MBOs.
- DatabaseClass package level class that handles subscription, login, synchronization, and other operations for the package.
- Synchronization parameters any synchronization parameters for the MBOs.
- Personalization parameters personalization parameters used by the package.
- Metadata Metadata class that allow you to query meta data including MBOs, their attributes, and operations, in a persistent table at runtime.

Validating Generated Code

Validation rules are enforced when generating client code. Define prefix names in the Mobile Business Object Preferences page of the Code Generation wizard to correct validation errors.

SAP Mobile WorkSpace validates and enforces identifier rules and checks for keyword conflicts in generated code, for example, by displaying error messages in the Properties view or in the wizard. Other than the known name conversion rules (converting '.' to '_', removing white space from names, and so on), there is no other language-specific name conversion. For example, cust_id is not changed to custId.

You can specify the prefix string for mobile business object, attribute, parameter, or operation names from the Mobile Business Object Preferences page. This allows you to decide what prefix to use to correct any errors generated from the name validation.

- 1. Select Window > Preferences.
- 2. Expand SAP AG > Mobile Development.
- 3. Select Mobile Business Object.
- **4.** Add or modify the **Naming Prefix** settings as needed.

The defined prefixes are added to the names (object, attribute, operation, and parameter) whenever these are autogenerated, for example, when you drag and drop a datasource onto the Mobile Application Diagram.

Creating a Project

Build a device application project.

Generating HeaderDoc from Generated Code

Once you have generated Objective-C code for your mobile business objects, you can generate HeaderDoc (HTML reference information) on the Mac from the generated code. HeaderDoc provides reference information for the MBOs you have designed. The HeaderDoc will help you to programmatically bind your device application to the generated code.

- 1. Navigate to the directory containing the generated code that was copied over from the Eclipse environment.
- 2. Run:

>headerdoc2html -o GeneratedDocDir GeneratedCodeDir
>qatherheaderdoc GeneratedDocDir

You can open the file GeneratedDocDir/masterTOC.html in a Web browser to see the interlinked sets of documentation.

Note: You can review complete details on HeaderDoc in the *HeaderDoc User Guide*, available from the Mac OS X Reference Library at http://developer.apple.com/mac/library/navigation/index.html.

Downloading the Latest Afaria Libraries

Afaria® provides provisioning of configuration data and certificates for your SAP Mobile Platform client application. Afaria libraries are packaged with SAP Mobile Platform, but may not be the latest software available. To ensure you have the latest Afaria libraries, download Afaria software.

- **1.** Navigate to the Mobile Enterprise Technical Support website at *http://frontline.sybase.com/support/downloads.aspx*.
- **2.** If not registered, register for an account.
- 3. Log into your account.
- 4. Select Software Updates and download the latest Static Link Libraries.
- **5.** Extract the contents of the downloaded zip file.
- **6.** Include the Afaria library into your project. See *Importing Libraries and Code*.

Importing Libraries and Code

Import the generated MBO code and associated libraries into the iOS development environment.

Note: For more information on Xcode, refer to the Apple Developer Connection: *http://developer.apple.com/tools/Xcode/*.


- 1. Start Xcode 4.6 and select Create a new Xcode project.
- 2. Select iOS Application and select an appropriate project template, and then click Next.
- Enter <ProjectName> as the Product Name, <Company Identifier> as the Company Identifier, select Universal as the Device Family product, and then click Next.

Note: If you will deploy more than one Xcode project with the same application name, the applications will overwrite each other on the device. Ensure that projects do not share the same name even though they have different application IDs.

4. Select a location to save the project and click **Create** to open it.

Xcode creates a folder, ProjectName>, to contain the project file,
ProjectName>.xcodeproj and another ProjectName> folder, which
contains a number of automatically generated files.

5. Select the **Architectures** section under Build Settings, and set Base SDK for All Configurations to iOS 6.1.

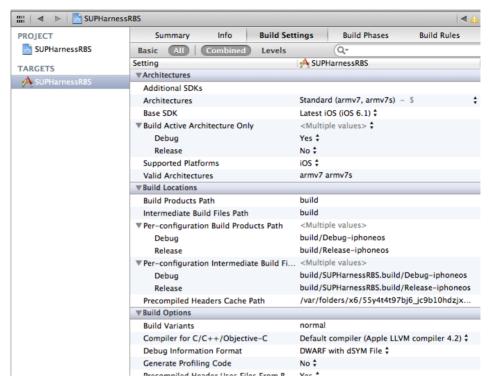

- **6.** Select the Valid Architectures with the default value armv7 armv7s, Supported Platforms as iOS, and the Targeted device family as iPhone/iPad. This ensures that the build of the application can run on either iPhone or iPad.
- 7. Scroll to the **Deployment** section and set the iOS Deployment Target as appropriate for the device version where you will deploy. The minimum version is iOS 4.3 or later. Earlier SDKs and deployment targets are not supported.
- **8.** Copy the files from your Windows machine to the <ProjectName> folder that Xcode created to contain the generated source code. Connect to the Microsoft Windows machine where SAP Mobile Platform is installed:
 - a) From the Apple Finder menu, select Go > Connect to Server.
 - b) Enter the name or IP address of the machine, for example, smb://<machine DNS name> or smb://<IP Address>.

You see the shared directory.

- 9. Navigate to the SMP_HOME\MobileSDK<version>\ObjectAPI\iOS directory, and copy the includes and Libraries folders to the <ProjectName>/
 <ProjectName> directory on your Mac.
- **10.** Navigate to the mobile application project (for example, C:\Documents and Settings\administrator\workspace\<ProjectName>), and copy the

Generated Code folder to the <ProjectName>/<ProjectName> directory on your Mac.

11. Right-click the <ProjectName> folder under the project, select Add Files to "<ProjectName>", navigate to the <ProjectName/ProjectName>/
Libraries/Debug-iphonesimulator directory, select the libclientrt.a, libSUPObj.a, libMo.a, libPerformanceLib.a, libsupClientUtil.a, libSUPSupportability.a, libAfariaSLL.a, libDatavault.a, and libsupUltralite.a libraries, unselect Copy items into destination group's folder (if needed), and click Add.

The libraries are added to the project in the Project Navigator.

Note: The library version corresponds to the configuration you are building. For example, if you are building for a debug version of the simulator, navigate to Libraries/Debug-iphonesimulator/ to add the libraries.

As an alternative to adding static libraries to the project, you can configure your project to specify the libraries in the project's build settings:

- Select the project from the Project Navigator.
- Click on the target under Targets and select **Build Settings**.
- In the Linking section, expand **Other Linker Flags**.
- Under Debug, add the following linker flags:


```
$(SRCROOT)/$(PRODUCT NAME)/Libraries/$(CONFIGURATION)$
(EFFECTIVE PLATFORM NAME)/libMo.a
$(SRCROOT) \( \sqrt{\text{$}} \) (PRODUCT NAME) \( \text{Libraries} \) $(CONFIGURATION) $
(EFFECTIVE PLATFORM NAME)/libsupobj.a
$(SRCROOT) \( \sqrt{$} (PRODUCT NAME) / Libraries / $(CONFIGURATION) $
(EFFECTIVE PLATFORM NAME)/libclientrt.a
$(SRCROOT) \( \sqrt{\text{$}} \) (PRODUCT NAME) \( \text{Libraries} \) $(CONFIGURATION) $
(EFFECTIVE PLATFORM NAME)/libPerformanceLib.a
$(SRCROOT) \( \sqrt{\text{$}} \) (PRODUCT NAME) \( \text{Libraries} \) $(CONFIGURATION) $
(EFFECTIVE PLATFORM NAME)/libsupClientUtil.a
$(SRCROOT) \( \bar{7}$ (PRODUCT NAME) / Libraries / $ (CONFIGURATION) $
(EFFECTIVE PLATFORM NAME)/libSUPSupportability.a
$(SRCROOT) \( \sqrt{\text{$}} \) (PRODUCT NAME) \( \text{Libraries} \) $(CONFIGURATION) $
(EFFECTIVE PLATFORM NAME)/libAfariaSLL.a
$(SRCROOT) \( \bar{7}$ (PRODUCT NAME) / Libraries / $(CONFIGURATION) $
(EFFECTIVE PLATFORM NAME)/libDatavault.a
$(SRCROOT) \( \sqrt{\text{$}} \) (PRODUCT NAME) / Libraries / $(CONFIGURATION) $
(EFFECTIVE PLATFORM NAME)/libsupUltralite.a
```

These linker flags resolve for all builds of the project.

- **12.** Click the project root, in the middle pane click the **ProjectName**> project, and set Objective-C Automatic Reference Counting in the Apple LLVM compiler 4.1 Language section to No.
- **13.** Click on the active target and modify the Library Search Path from the Building Settings. For example:

```
$(SRCROOT)/../iOS/Libraries/$(CONFIGURATION)$
(EFFECTIVE PLATFORM NAME)
```

Enter the path to the location where you copied the libraries. Specify separate profiles for debug and release, and specify "any iOS" and "any iOS simulator." Ensure that you escape the paths using double quotes.

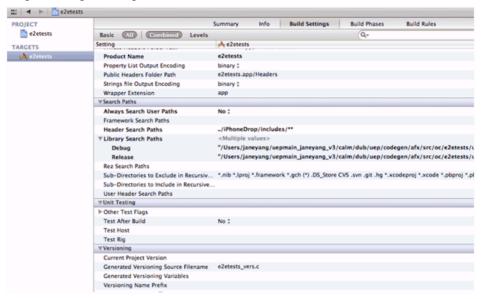

- 14. Click on the active target, and modify the Header Search Path from Building Settings. Specify the path to the location where you copied the include files, and select the Recursive checkbox. The header files in the client library are grouped into subdirectories public and internal, so the recursive option is required.
- **15.** Add the following frameworks from the SDK to your project by clicking on the active target, and selecting **Build Phase** > **Link Binary With Libraries**. Click on the + button and select the following binaries from the list:
 - CoreFoundation.framework
 - Security.framework
 - CFNetwork.framework
 - SystemConfiguration.framework
 - MobileCoreServices.framework
 - libicucore.A.dylib
 - libstdc++.dylib
 - libz.dylib
- **16.** Hold the Option key, and select **Product > Clean Build Folder** and then **Product > Build** to test the initial set up of the project. If you have correctly followed this procedure, then you should receive a **Build Succeeded** message.

17. Click on the active target, select the **Info** tab, change the "Application requires iPhone environment" setting to "Application does not run in background," and set to YES.


Note: If you want to allow your application to continue to run safely in the background, do not perform this step. See *Developer Guide: iOS Object API Applications > Development Task Flow for Object API Applications > Creating a Project > Managing the Background State.*

18. Write your application code to reference the generated MBO code. See the *Developer Guide: iOS Object API Applications* for information about referencing the iOS Client Object API.

Importing Libraries and Code for Applications Enabled with ARC


Import the generated MBO code and associated libraries into the iOS development environment, to support applications enabled with automatic reference counting (ARC).

- 1. Create a non-ARC static library target for the generated code.
 - a) Select the application project file in Xcode, and click on Add Target at the bottom of the Project Settings screen. When prompted, select the "Cocoa Touch Static Library" template from the Framework & Library section and click Next.
 - b) Enter the project name with the name you want for your library, for example, "generatedcode_lib". Make sure the "Use Automatic Reference Counting" option is not selected. Click on **Finish**. You have created a second target in your project.

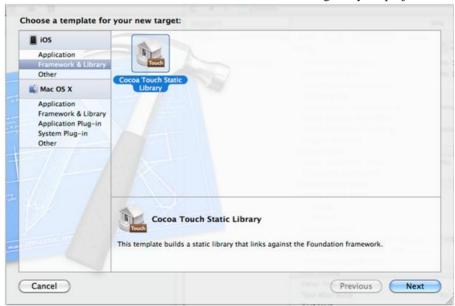


c) Delete the sample class files the wizard created (generatedcode_lib.h, and generatedcode_lib.m).

- 2. Make sure the static library is not using ARC by selecting the <code>generatedcode_lib</code> target, going to "Build Settings," and verifying "Automatic Reference Counting" is set to "NO".
- 3. Add generated code into the static library target.
 - a) Right click on the generatedcode_lib folder from the Group & File view, and select Add Files to
 - b) Select your generated code location, and select the option "Add to targets" to "generatedcode lib". Do not select *<your main target>*.
 - c) Click Add.

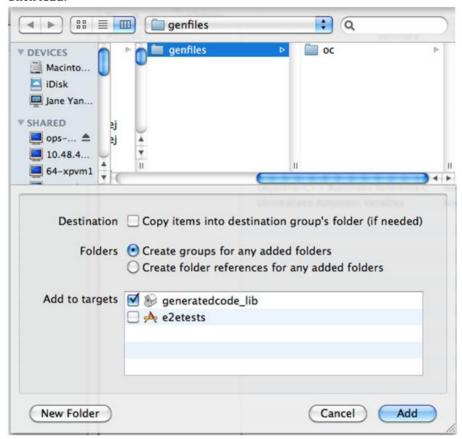

- **4.** Modify the build settings of the static library target.
 - a) Select the generatedcode_lib target, and go to "Build Settings", and to "Header Search Paths".
 - b) Add the location of the SUP client stack includes folder. Make sure the "Recursive" checkbox is checked.
- **5.** Link the main application target with the new static library.

- a) Select your main application target, then click on "Build Phase" and expand the "Link Binary With Libraries" section.
- b) Click on the plus (+) button and select the new static library from the list.
- **6.** Add the static library as a dependency.
 - a) Select your main application target, then click on "Build Phase" and expand the "Target Dependencies" section.
 - b) Click on the plus (+) button and select the new static library from the list.

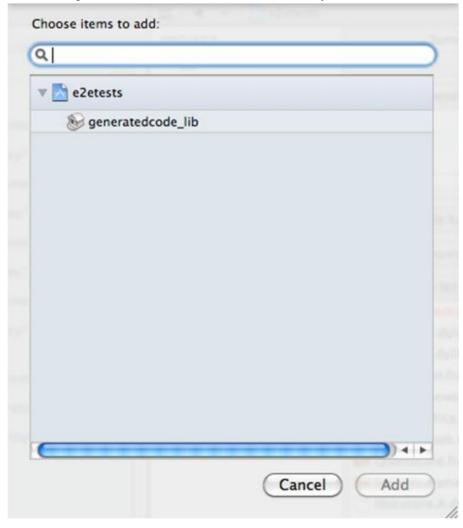

- 7. Make sure that ARC is enabled for your main application target.
 - a) Select the main target, and go to "Build Settings".
 - b) Verify that Automatic Reference Counting" is set to "YES".

- **8.** Add your ARC enabled code into the main application target.
- **9.** Import the SAP Mobile Platform client stack libraries to the main target. Perform the steps in *Developer Guide: iOS Object API Applications > Development Task Flow for Object API Applications > Creating a Project > Importing Libraries and Code*, to import and add only the libraries to the main target. Do not add generated code to the main target, because you have created the secondary static library target with the generated code.
- **10.** Build your ARC-enabled main application target with the SAP Mobile Platform client stack and generated code.

Ignore semantic issue warnings during compilation. For example:

```
"Semantic Issue
Type of property 'databaseName' does not match type of accessor
'setDatabaseName:'"
```

Managing the Background State

To allow your application to continue to safely run when it goes into the background, you must implement code in its AppDelegate class to ensure that the SUPApplication instance's connection to the server shuts down gracefully when going into the background, and starts up when the application becomes active again.

This is important because in iOS, when an application goes into the background, it can have its network sockets invalidated, or the application may be shut down at any time. For correct behavior of the SUPApplication connection, the connection needs to be stopped when in background, and only started again when the application goes back to the foreground.

In addition, if your application is using replication based synchronization, and is synchronizing a large amount of data at the time the application goes into background, it may be necessary to interrupt the sync. To do this, the synchronization needs to be done using a sync status listener, and the applicationDidEnterBackground method must notify the listener to set the info.state flag to SYNC_STATUS_CANCEL (see *Developer Guide: iOS Object API Applications > Client Object API Usage > Callback and Listener APIs > SyncStatusListener API* for more details).

You must implement two appDelegate methods: applicationDidEnterBackground and applicationWillEnterForeground.

Note: The applicationWillEnterForeground method is also called when the application first starts up, where most applications would have code already to register the application and start the SUPApplication connection. This example code uses a boolean wasPreviouslyInBackground so that the applicationWillEnterForeground method can detect whether it is called on coming out of the background or is called on a first startup.

```
BOOL wasPreviouslyInBackground = NO;
```


```
- (void) applicationDidEnterBackground: (UIApplication *) application
 /*
  Use this method to release shared resources, save user data,
invalidate timers, and store enough application state information to
restore your application to its current state in case it is
terminated later.
  If your application supports background execution, this method is
called instead of applicationWillTerminate: when the user guits.
    @try
      wasPreviouslyInBackground = YES;
       [SMP101SMP101DB disableSync];
       [SUPApplication stopConnection:0];
     (a
    catch (NSException *ee)
       // log an error or alert user via notification
- (void)applicationWillEnterForeground: (UIApplication *)application
  Called as part of the transition from the background to the
inactive state; here you can undo many of the changes made on
entering the background.
if (wasPreviouslyInBackground)
// Run these in the background since these are blocking calls and
// this will be called from the UI thread.
dispatch queue t queue =
dispatch get global queue (DISPATCH QUEUE PRIORITY HIGH, 0);
dispatch async (queue, ^
    @try
       [SMP101SMP101DB enableSync];
       [SUPApplication startConnection:30];
     (a
    catch (NSException *ee)
       // log an error or alert user via notification
  });
```

Development Task Flow for Object API Applications

Development Task Flow for DOE-based Object API Applications

Describes the overall development task flow for DOE-based native applications, and provides information and procedures for setting up the development environment, and developing DOE-based device applications.

This diagram illustrates how you can develop a device application directly from mobile business objects (MBOs), using the Object API and custom device application coding. This is how you create device applications with sophisticated UI interaction, validation, business logic, and performance.

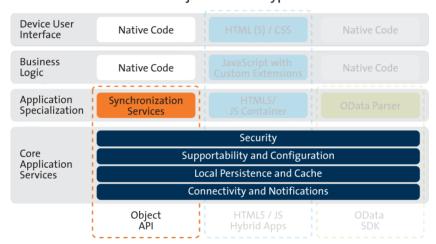

Object API Archetype

The Object API provides the core application services described in the diagram.

The Authentication APIs provide security by authenticating the client to the SAP Mobile Server.

The Synchronization APIs allow you to synchronize mobile business objects (MBOs) based on synchronization parameters, for individual MBOs, or as a group, based on the group's synchronization policy.

The Application and Connection APIs allow clients to register with and connect to the SAP Mobile Server. The Callback Handler and Listener APIs, and the Target Change Notification APIs provide notifications to the client on operation success or failure, or changes in data.

With DOE-based applications, connectivity and notifications use the Messaging channel.

Installing the iOS Development Environment

Install the iOS development environment, and prepare iOS devices for authentication.

Downloading the Xcode IDE

Download and install Xcode.

- **1.** Download Xcode from the Apple Web site: http://developer.apple.com/xcode/.
- 2. Complete the Xcode installation following the instructions in the installer.

Downloading Older Versions of the Xcode IDE

If you do not have the supported version of Xcode and the iOS SDK, you need to download it from the Downloads for Apple Developers Web site.

See *Supported Hardware and Software* for the most current version information for mobile device platforms and third-party development environments. If necessary, you can download older versions.

- 1. Go to http://developer.apple.com/downloads/.
 - You must be a paying member of the iOS Developer Program. Free members do not have access to the supported version.
- 2. Log in using your Apple Developer credentials.
- **3.** (Optional) Deselect all Categories except Developer Tools to narrow the search scope.
- **4.** Download the supported Xcode and SDK combination.

Installing X.509 Certificates on iOS Clients

Install generated X.509 certificates and test them in your iOS clients. A certificate provides an additional level of secure access to an application, and may be required by an organization's security policy.

Generating Objective-C Object API Code

Use the Code Generation Utility to generate object API code, which allows you to use APIs to develop device applications for Apple devices.

Prerequisites

• Generate and download the ESDMA bundle for you application.

- Run the ESDMA Converter utility to turn your ESDMA into an SAP Mobile Platform package.
- Deploy the package to the SAP Mobile Server.

See Create, Generate, and Download the ESDMA Bundle, Convert the ESDMA Bundle into an SAP Mobile Platform Package, and Deploy the SAP Mobile Platform Package in Mobile Data Models: Using Data Orchestration Engine.

Task

- **1.** Make sure that your *<ESDMA dir>*\META-INF directory contains these three files:
 - afx-esdma.xml
 - ds-doe.xml
 - sup-db.xml
- **2.** From SMP_HOME\MobileSDK23\ObjectAPI\Utils\bin, run the codegen.bat utility, specifying the following parameters:

```
codegen -oc -client -doe -sqlite
[-output <output_dir>] [-doc] <ESDMA_dir>\META-INF\sup-db.xml
```

- The -output parameter allows you to specify an output directory. If you omit this parameter, the output goes into the SMP_HOME\MobileSDK23\ObjectAPI\Utils\genfiles directory, assuming codegen.bat is run from the SMP_HOME\MobileSDK23\ObjectAPI\Utils\bin directory.
- The -doc parameter specifies that documentation is generated for the generated code.

Ignore these warnings:

```
log4j:WARN No appenders could be found for logger ... log4j:WARN Please initialize the log4j system properly.
```

Generated Code Location and Contents

The location of the generated Object API code is the location you specified when you generated the code using codegen.bat at the command line.

The contents of the folder is determined by the parameters you pass to codegen. bat in the command line, and include generated class (.h., .m) files that contain:

- DatabaseClass package level class that handles subscription, login, synchronization, and other operations for the package.
- MBO class which handles persistence and operation replay of your MBOs.
- Personalization parameters personalization parameters used by the package.
- Metadata Metadata class that allows you to query meta data including MBOs, their attributes, and operations, in a persistent table at runtime.

Creating a Project

Build a device application project.

Generating HeaderDoc from Generated Code

Once you have generated Objective-C code for your mobile business objects, you can generate HeaderDoc (HTML reference information) on the Mac from the generated code. HeaderDoc provides reference information for the MBOs you have designed. The HeaderDoc will help you to programmatically bind your device application to the generated code.

- 1. Navigate to the directory containing the generated code that was copied over from the Eclipse environment.
- 2. Run:

>headerdoc2html -o GeneratedDocDir GeneratedCodeDir
>gatherheaderdoc GeneratedDocDir

You can open the file GeneratedDocDir/masterTOC.html in a Web browser to see the interlinked sets of documentation.

Note: You can review complete details on HeaderDoc in the *HeaderDoc User Guide*, available from the Mac OS X Reference Library at http://developer.apple.com/mac/library/navigation/index.html.

Downloading the Latest Afaria Libraries

Afaria® provides provisioning of configuration data and certificates for your SAP Mobile Platform client application. Afaria libraries are packaged with SAP Mobile Platform, but may not be the latest software available. To ensure you have the latest Afaria libraries, download Afaria software.

- **1.** Navigate to the Mobile Enterprise Technical Support website at http://frontline.sybase.com/support/downloads.aspx.
- 2. If not registered, register for an account.
- **3.** Log into your account.
- **4.** Select **Software Updates** and download the latest Static Link Libraries.
- 5. Extract the contents of the downloaded zip file.
- **6.** Include the Afaria library into your project. See *Importing Libraries and Code*.

Importing Libraries and Code


Import the generated MBO code and associated libraries into the iOS development environment.

Note: For more information on Xcode, refer to the Apple Developer Connection: *http://developer.apple.com/tools/Xcode/*.

- 1. Start Xcode 4.6 and select Create a new Xcode project.
- Select iOS Application and Window-based Application as the project template, and then click Next.
- 3. Enter <ProjectName> as the **Product Name**, MyCorp as the **Company Identifier**, select **Universal** as the **Device Family** product, and then click **Next**.

Note: If you will deploy more than one Xcode project with the same application name, the applications will overwrite each other on the device. Ensure that projects do not share the same name even though they have different application IDs.

4. Select the **Architectures** tab, and set Base SDK for All Configurations to ios 6.1.

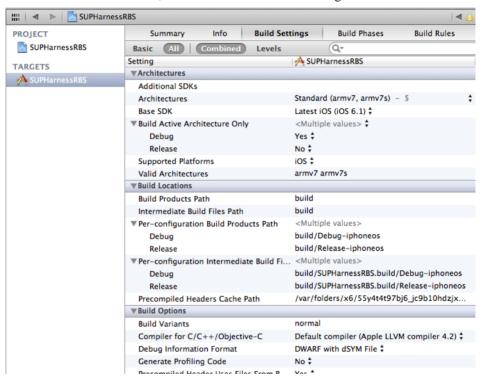

- **5.** Select the **Deployment** tab and set the iOS Deployment Target to iOS 4.3 or later. Earlier SDKs and deployment targets are not supported.
- **6.** Select the Valid Architectures with the default value armv7 armv7s, Supported Platforms as iOS, and the Targeted device family as iPhone/iPad. This ensures that the build of the application can run on either iPhone or iPad.
- 7. Select a location to save the project and click **Create** to open it.

Xcode creates a folder, ProjectName>, to contain the project file,
ProjectName>. xcodeproj and another ProjectName> folder, which
contains a number of automatically generated files.

Copy the files from your Windows machine in to the <ProjectName> folder that Xcode created to contain the generated source code.

- 8. Connect to the Microsoft Windows machine where SAP Mobile Platform is installed:
 - a) From the Apple Finder menu, select **Go > Connect to Server**.
 - b) Enter the name or IP address of the machine, for example, smb://<machine DNS name> or smb://<IP Address>.

You see the shared directory.

- 9. Navigate to the SMP_HOME\MobileSDK23\ObjectAPI\DOE\iOS directory, and copy the includes and Libraries folders to the <ProjectName>/
 <ProjectName> directory on your Mac.
- 10. Navigate to the output directory that you specified when you generated Objective-C code, and copy that folder to the <ProjectName>/<ProjectName> directory on your Mac.

The output folder is added to the project in the Project Navigator.

12. Right-click the <ProjectName> folder under the project, select Add Files to "<ProjectName>", navigate to the <ProjectName/ProjectName>/
Libraries/Debug-iphonesimulator directory, select the libclientrt.a, libSUPObj.a, libMO.a, libPerformanceLib.a, libsupClientUtil.a, libSUPSupportability.a, libsupSqlite.a, libAfariaSLL.a and libDatavault.a libraries, unselect Copy items into destination group's folder (if needed), and click Add.

The libraries are added to the project in the Project Navigator.

Note: The library version corresponds to the configuration you are building. For example, if you are building for a debug version of the simulator, navigate to libs/Debug-iphonesimulator/ to add the libraries.

- 13. Right-click the project root, select New Group, and then rename it to Resources.
- 14. Right-click the Resources folder, select Add Files to "<ProjectName>", navigate to the includes directory, select the Settings.bundle file, unselect Copy items into destination group's folder (if needed), and click Add.

The bundle Settings.bundle is added to the project in the Project Navigator.


This bundle adds resources that lets iOS device client users input information such as server name, server port, user name and activation code in the Settings application.

15. Click the project root, in the middle pane click the **ProjectName**> project, and set Automatic Reference Counting (ARC) to NO.

16. Click on the active target and modify the Library Search Path from the Building Settings. For example:

```
$ (SRCROOT) /../iOS/Libraries/$ (CONFIGURATION) $
(EFFECTIVE_PLATFORM_NAME)
```

Enter the path to the location where you copied the libraries. Specify separate profiles for debug and release, and specify "any iOS" and "any iOS simulator." Ensure that you escape the paths using double quotes.

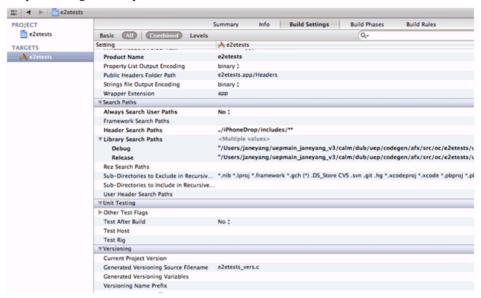

- 17. Click on the active target, and modify the Header Search Path from Building Settings.

 Specify the path to the location where you copied the include files, and select the Recursive checkbox. The header files in the client library are grouped into subdirectories public and internal, so the recursive option is required.
- **18.** Add the following frameworks from the SDK to your project by clicking on the active target, and selecting **Build Phase** > **Link Binary With Libraries**. Click on the + button and select the following binaries from the list:
 - CoreFoundation.framework
 - Security.framework
 - CFNetwork.framework
 - SystemConfiguration.framework
 - MobileCoreServices.framework
 - libicucore.A.dylib
 - libstdc++.dylib
 - libz.dylib

- **19.** Hold the Option key, and select **Product > Clean Build Folder** and then **Product > Build** to test the initial set up of the project. If you have correctly followed this procedure, then you should receive a **Build Succeeded** message.
- **20.** In the Info.plist file, set the "Application does not run in background" setting to YES.


Note: If you want to allow your application to continue to run safely in the background, do not perform this step. See *Developer Guide: iOS Object API Applications > Development Task Flow for DOE-based Object API Applications > Creating a Project > Managing the Background State.*

21. Write your application code to reference the generated MBO code. See the *Developer Guide: iOS Object API Applications* for information about referencing the iOS Client Object API.


Importing Libraries and Code for Applications Enabled with ARC

Import the generated MBO code and associated libraries into the iOS development environment, to support applications enabled with automatic reference counting (ARC).


- 1. Create a non-ARC static library target for the generated code.
 - a) Select the application project file in Xcode, and click on Add Target at the bottom of the Project Settings screen. When prompted, select the "Cocoa Touch Static Library" template from the Framework & Library section and click Next.
 - b) Enter the project name with the name you want for your library, for example, "generatedcode_lib". Make sure the "Use Automatic Reference Counting" option is not selected. Click on **Finish**. You have created a second target in your project.

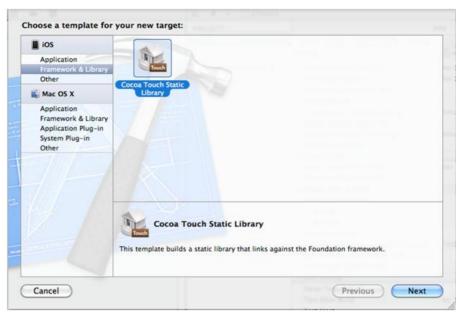

- c) Delete the sample class files the wizard created (generatedcode_lib.h, and generatedcode_lib.m).
- 2. Make sure the static library is not using ARC by selecting the <code>generatedcode_lib</code> target, going to "Build Settings," and verifying "Automatic Reference Counting" is set to "NO".
- **3.** Add generated code into the static library target.
 - a) Right click on the generatedcode_lib folder from the Group & File view, and select Add Files to
 - b) Select your generated code location, and select the option "Add to targets" to "generatedcode_lib". Do not select *<your main target>*.
 - c) Click Add.

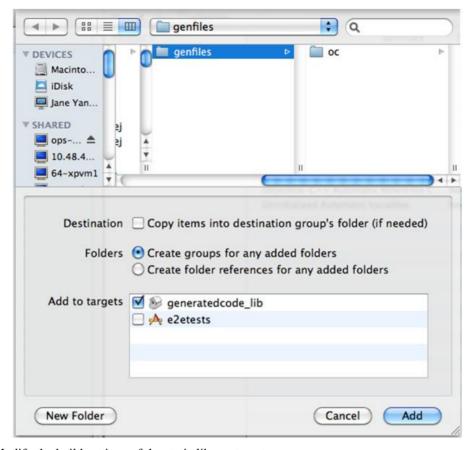

- **4.** Modify the build settings of the static library target.
 - a) Select the generatedcode_lib target, and go to "Build Settings", and to "Header Search Paths".
 - b) Add the location of the SUP client stack includes folder. Make sure the "Recursive" checkbox is checked.
- **5.** Link the main application target with the new static library.
 - a) Select your main application target, then click on "Build Phase" and expand the "Link Binary With Libraries" section.
 - b) Click on the plus (+) button and select the new static library from the list.
- **6.** Add the static library as a dependency.
 - a) Select your main application target, then click on "Build Phase" and expand the "Target Dependencies" section.
 - b) Click on the plus (+) button and select the new static library from the list.

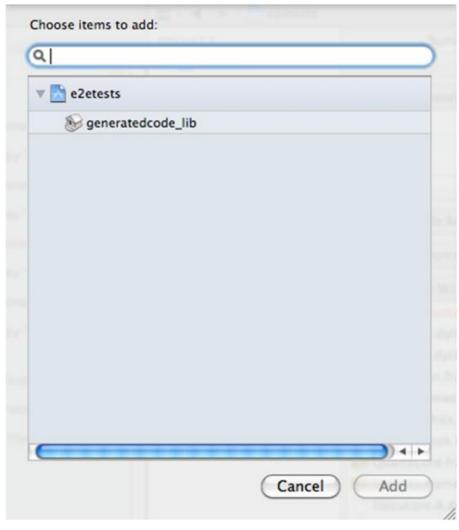

- 7. Make sure that ARC is enabled for your main application target.
 - a) Select the main target, and go to "Build Settings".
 - b) Verify that Automatic Reference Counting" is set to "YES".
- **8.** Add your ARC enabled code into the main application target.
- 9. Import the SAP Mobile Platform client stack libraries to the main target. Perform the steps in *Developer Guide: iOS Object API Applications > Development Task Flow for DOE-based Object API Applications > Creating a Project > Importing Libraries and Code*, to import and add only the libraries to the main target. Do not add generated code to the main target, because you have created the secondary static library target with the generated code.

10. Build your ARC-enabled main application target with the SAP Mobile Platform client stack and generated code.

Ignore semantic issue warnings during compilation. For example:

```
"Semantic Issue
Type of property 'databaseName' does not match type of accessor
'setDatabaseName:'"
```

Managing the Background State

To allow your application to continue to safely run when it goes into the background, you must implement code in its AppDelegate class to ensure that the SUPApplication instance's connection to the server shuts down gracefully when going into the background, and starts up when the application becomes active again.

This is important because in iOS, when an application goes into the background, it can have its network sockets invalidated, or the application may be shut down at any time. For correct behavior of the SUPApplication connection, the connection needs to be stopped when in background, and only started again when the application goes back to the foreground.

In addition, if your application is using replication based synchronization, and is synchronizing a large amount of data at the time the application goes into background, it may be necessary to interrupt the sync. To do this, the synchronization needs to be done using a sync status listener, and the applicationDidEnterBackground method must notify the listener to set the info.state flag to SYNC_STATUS_CANCEL (see *Developer Guide: iOS Object API Applications > Client Object API Usage > Callback and Listener APIs > SyncStatusListener API* for more details).

You must implement two appDelegate methods: applicationDidEnterBackground and applicationWillEnterForeground.

Note: The applicationWillEnterForeground method is also called when the application first starts up, where most applications would have code already to register the application and start the SUPApplication connection. This example code uses a boolean wasPreviouslyInBackground so that the

applicationWillEnterForeground method can detect whether it is called on coming out of the background or is called on a first startup.

```
BOOL wasPreviouslyInBackground = NO;

- (void)applicationDidEnterBackground:(UIApplication *)application {
    /*
    Use this method to release shared resources, save user data, invalidate timers, and store enough application state information to restore your application to its current state in case it is terminated later.

If your application supports background execution, this method is
```

```
called instead of applicationWillTerminate: when the user quits.
   * /
    @try
     {
       wasPreviouslyInBackground = YES;
      [SMP101SMP101DB disableSync];
       [SUPApplication stopConnection:0];
     (a
     catch (NSException *ee)
       // log an error or alert user via notification
- (void) application WillEnterForeground: (UIApplication *) application
  Called as part of the transition from the background to the
inactive state; here you can undo many of the changes made on
entering the background.
   * /
if (wasPreviouslyInBackground)
// Run these in the background since these are blocking calls and
// this will be called from the UI thread.
dispatch queue t queue =
dispatch get global queue (DISPATCH QUEUE PRIORITY HIGH, 0);
 dispatch async (queue, ^
  {
     @try
     {
       [SMP101SMP101DB enableSync];
       [SUPApplication startConnection:30];
     (a
     catch (NSException *ee)
       // log an error or alert user via notification
   });
```

Development Task Flow for DOE-based Object API Applications

Developing the Application Using the Object API

Use the Object API to develop the application. An application consists of building blocks which the developer uses to start the application, perform functions needed for the application, and shutdown and uninstall the application.

Observe best practices to help improve the success of software development for SAP Mobile Platform.

- Avoid making calls on the "main" thread on the device as this provides a poor response.
 Instead, use loading screens and activity spinners while doing the work in a background thread or operation queue. Do this while submitting and saving operations, and doing imports that update the tables displayed.
- Use an operation queue if you are trying to process imports and show them as they come in a UITableViewController. The operation callback will overwhelm the UI if you do one at a time. Instead, use an operation queue and process in groups.
- When testing for memory leaks, ignore the one-time startup leaks reported for the Messaging Server service.

Initializing an Application

Initialize the application when it starts the first time and subsequently.

Initially Starting an Application

Starting an application the first time.

Setting Up Application Properties

The Application instance contains the information and authentication credentials needed to register and connect to the SAP Mobile Server.

The following code illustrates how to set up the minimum required fields:

```
// Initialize Application settings
SUPApplication* app = [SUPApplication getInstance];

// The identifier has to match the application ID deployed to the SAP
Mobile Server
app.applicationIdentifier = @"SMP101";

// ConnectionProperties has the information needed to register
// and connect to SAP Mobile Server
SUPConnectionProperties* props = app.connectionProperties;
props.serverName = @"server.mycompany.com";
// if you are using Relay Server, then use the correct port number
```

```
for the Relay Server.
// if connecting using http without a relay server, use the messaging
administration port, by default 5001.
// if connecting using https without a relay server, then use a new
port for https, for example 9001.
props.portNumber = 5001;
// if connecting using https, set the network protocol
props.NetworkProtocol = @"https";
props.activationCode = @"activationcode";
// if you are connecting through relay server, then use the MBS
farmId for that Relay Server
// otherwise use the farmId from the SCC application connection
props.farmId = @"farmId";
// if you are connecting through relay server and using auto
registration,
// then you must provide the correct urlSuffix from the relay server
// Obtain the url suffix value from the Relay Server configuration
for the specific farm.
// The client url suffix value should be used in the application.
// For example: props.urlSuffix = @"/ias relay server/client/
rs client.dll";
props.urlSuffix = @"urlSuffix";
// provide user credentials
SUPLoginCredentials* login = [SUPLoginCredentials getInstance];
login.username = @"supAdmin";
login.password = @"supPwd";
props.loginCredentials = login;
// Initialize generated package database class with this Application
instance
[SMP101SMP101DB setApplication:app];
```

If you are using a Relay Server, specify the connection as follows:

```
// specify Relay Server Host
Props.serverName = @"relayserver.mycompany.com";
// specify Relay Server Port (port 80 by default)
Props.portNumber = 80;
// specify the Relay Server MBS Farm, for example MBS_Farm
Props.farmId = @"MBS FARM";
```

Optionally, you can specify the Relay Server URL suffix.

Using a Reverse Proxy for Object API Applications

The Object API application communicates with SAP Mobile Server through two ports:

- 1. Application registration (default 5001)
- **2.** Application synchronization (default 2480)

The SAP Mobile Server administrator configures two ports with each port serving one SAP Mobile Server port, so that:

- The root context of http://reverseProxy:5001 maps to http://server-name:5001
- The root context of http://reverseProxy:2480 maps to http://server-name:2480

Set Object API application connection properties just as you would to directly connect to SAP Mobile Server.

The SAP Mobile Server administrator configures two contexts for one SAP Mobile Server port, so that:

- The "/smp/message" context of http://reverseProxy:8080 maps to http://server-name: 5001
- The "/smp/mobilink" context of http://reverseProxy:8080 maps to http://server-name: 2480

Set the URL suffix for the Object API application to "/smp/message" for registering applications and "/smp/mobilink" for synchronization, just as you would if connecting to SAP Mobile Server through a Relay Server which is not installed at the default location. The difference is that you do not include a FarmId for the reverse proxy.

Note: When using an Apache server as a reverse proxy without SAP Hosted Relay Server to proxy Object API Applications against SAP Mobile Server, if a custom URL suffix is used, clients should specify a custom URL suffix including a trailing forward slash "/". For example, "/myApp/" instead of "/myApp". If not, the client may report connection failures.

Communicating with SAP Mobile Server Through a Reverse Proxy

Connect to SAP Mobile Server through a Reverse Proxy using Relay Server or the Apache Web server.

The Object API application can communicate with SAP Mobile Server:

- Directly
- Through Relay Server by specifying:
 - Just the FarmID
 - Just the URL suffix
 - · Both the FarmID and URL suffix
- Through a Reverse Proxy by specifying only the URL suffix you can configure the
 reverse proxy in such a way that the device communicates to http://server:port/
 customcontext/tm or /tm2 when communicating with SAP Mobile Server. "FarmID" has
 no meaning when using a Reverse Proxy. In this case, use only the URL suffix and leave
 "FarmID" empty.

Note: You can also use the custom context with the Relay Server when using Apache.

Connecting to SAP Mobile Server Through a Reverse Proxy Using Relay Server:

```
// Register:
   SUPApplication *app = [SUPApplication getInstance];
   SUPConnectionProperties *props = app.connectionProperties;
```

```
props.urlSuffix = @"/ias_relay_server/client/rs_client.dll/
$messaging-farmId$";
    // (e.g. /ias_relay_server/client/rs_client.dll/mega-vm008.msg)

//Synchronize:
    SUPConnectionProfile *sp = [TestTestDB
getSynchronizationProfile];
    sp.networkStreamParams = @"url_suffix=/ias_relay_server/client/
rs_client.dll/$replication-farmId$";
    // (e.g. /ias_relay_server/client/rs_client.dll/mega-vm008.rep)
```

Connecting to SAP Mobile Server Through a Reverse Proxy Using Apache Web Server as Proxy Server:

```
Add to the httpd.conf file:
content: Listen 80 <VirtualHost *:80>
ServerName proxy-server
<Location /app1/>
ProxyPass http://sup-server:5001/ ProxyPassReverse
http://sup-server:5001/
</Location>
<Location /app2/>
ProxyPass http://sup-server:2480/
ProxyPassReverse http://sup-server:2480/
</Location>
</VirtualHost>
//Register
SUPApplication *app = [SUPApplication getInstance];
   SUPConnectionProperties *props = app.connectionProperties;
  props.urlSuffix = @"/app1";
//Synchronize
SUPConnectionProfile *sp = [TestTestDB getSynchronizationProfile];
  sp.networkStreamParams = @"url suffix=/app2";
```

Registering an Application

Each device must register with the server before establishing a connection.

To register the device with the server during the initial application startup, use the registerApplication method in the SUPApplication class. You do not need to use the registerApplication method for subsequent application start-ups. The registerApplication method automatically starts the connection to complete the registration process.

Call the generated database's setApplication method before starting the connection or registering the device.

The following code shows how to register the application and device.

```
SUPApplication* app = [SUPApplication getInstance];
@try {
   [app setApplicationIdentifier: @"appname"]; ( same as in SCC )
```

```
[app setApplicationCallback:self]; ( must implement the
SUPApplicationCallback protocol )
 SUPConnectionProperties* props = app.connectionProperties;
  [props setServerName:@"servername"];
  [props setPortNumber:portnumber];
 [props setUrlSuffix:@""];
 [props setFarmId:@"1"]; ( same as in SCC )
 SUPLoginCredentials* login = [SUPLoginCredentials getInstance];
 login.username = @"username"; ( same as in SCC )
 login.password = nil;
 props.loginCredentials = login;
 props.activationCode = @"activationcode"; ( same as in SCC )
@catch (SUPPersistenceException * pe) {
 NSLog(@"%@: %@", [pe name], [pe message]);
// Initialize generated package database class with this Application
[SMP101SMP101DB setApplication:app];
@trv {
 [app registerApplication:0];
@catch (SUPApplicationTimeoutException * pe) {
 NSLog(@"%@: %@", [pe name],[pe message]);
```

Setting Up the Connection Profile

The Connection Profile stores information detailing where and how the local database is stored, including location and page size. The connection profile also contains UltraLite[®]J runtime tuning values.

Set up the connection profile before the first database access, and check if the database exists by calling the databaseExists method in the generated package database class. Any settings you establish after the connection has already been established will not go into effect.

The generated database class automatically contains all the default settings for the connection profile. You may add other settings if necessary. For example, you can set the database to be stored in an SD card or set the encryption key of the database.

Use the SUPConnectionProfile class to set up the locally generated database. Retrieve the connection profile object using the SAP Mobile Platform database's getConnectionProfile method.

```
SUPConnectionProfile* cp = [SMP101SMP101DB getConnectionProfile];
[cp setEncryptionKey:@"Your key"];
```

An application can have multiple threads writing to the database during synchronization by enabling the connection profile property, allowConcurrentWrite. Setting the property to "true" allows multiple threads to perform create, read, update, or delete operations at the same time in a package database. For example:

```
[ [SMP101DB getConnectionProfile]
setBoolean:@"allowConcurrentWrite"
    :YES];
```

Note: Multiple threads are allowed to write to the database at the same time. However, there will be errors when multiple threads write to the same row of one MBO. Avoid writing to the same MBO row in your application.

Setting Up Connectivity

Store connection information to the SAP Mobile Server data synchronization channel.

Setting Up the Synchronization Profile

You can set SAP Mobile Server synchronization channel information by calling the synchronization profile's setter method. By default, this information includes the server host, port, domain name, certificate and public key that are pushed by the message channel during the registration process.

Settings are automatically provisioned from the SAP Mobile Server. The values of the settings are inherited from the application connection template used for the registration of the application connection (automatic or manual). You must make use of the connection and security settings that are automatically used by the Object API.

Typically, the application uses the settings as sent from the SAP Mobile Server to connect to the SAP Mobile Server for synchronization so that the administrator can set those at the application deployment time based on their deployment topology (for example, using Relay Server, using e2ee security, or a certificate used for the intermediary, such as a Relay Server Web server). See the *Applications* and *Application Connection Templates* topics in *System Administration*.

Set up a secured connection using the ConnectionProfile object.

1. Retrieve the synchronization profile object using the SAP Mobile Platform database's getSynchronizationionProfile method.

```
SUPConnectionProfile* cp = [SMP101SMP101DB
getSynchronizationProfile];
```

2. Set the connection fields in the ConnectionProfile object.

```
SUPConnectionProfile* cp = [SMP101SMP101DB
getSynchronizationProfile];
[cp setServerName:@"xxxx"];
[cp setPortNumber:2480];
```

Creating and Deleting a Device's Local Database

There are methods in the generated package database class that allow programmers to delete or create a device's local database. A device local database is automatically created when needed by the Object API. The application can also create the database programatically by calling the createDatabase method. The device's local database should be deleted when uninstalling the application.

1. Connect to the generated database by calling the generated database instance's openConnection method.

```
[SMP101SUP101DB openConnection];
```

If the database does not already exist, the openConnection method creates it.

2. Optionally, you can include code in your application to check if an instance of the generated database exists by calling the generated database instance's databaseExists method.

If an instance of the generated database does not exist, call the generated database instance's createDatabase method.

```
if (![SMP101SMP101DB databaseExists])
[SMP101SMP101DB createDatabase];
```

3. When the local database is no longer needed, delete it by calling the generated database instance's deleteDatabase method.

```
[SMP101SMP101DB deleteDatabase];
```

Logging In

Use online authentication with the server.

Authenticate the user for data synchronization by calling the generated database API onlineLogin method.

Use the SUPSynchronizationProfile to store the username and password.

```
SUPConnectionProfile *syncProfile = [SMP101SMP101DB
getSynchronizationProfile];
[syncProfile setUser:@"user"];
[syncProfile setPassword:@"password"];
[SMP101SMP101DB onlineLogin];
```

Turn Off API Logger

In production environments, turn off the API logger to improve performance.

```
[MBOLogger setLogLevel:LOG_OFF];
```

Setting Up Callbacks

When your application starts, it can register database and MBO callback listeners.

Callback handler and listener interfaces are provided so your application can monitor changes and notifications from SAP Mobile Platform:

- The SUPApplicationCallback class is used for monitoring changes to application settings, messaging connection status, and application registration status.
- The SUPCallbackHandler interface is used to monitor notifications and changes related to the database. Register callback handlers at the package level use the registerCallbackHandler method in the generated database class. To register for

a particular MBO, use the registerCallbackHandler method in the generated MBO class.

Setting Up Callback Handlers

Use the callback handlers for event notifications.

Use the SUPCallbackHandler API for event notifications including login for synchronization and replay. If you do not register your own implementation of the SUPCallbackHandler interface, the generated code will register a new default callback handler.

1. The generated database class contains a method called registerCallbackHandler. Use this method to install your implementation of SUPCallbackHandler.

For example:

```
DBCallbackHandler* handler = [DBCallbackHandler newHandler];
[SMP101SMP101DB registerCallbackHandler:handler];
```

2. Each generated MBO class also has the same method to register your implementation of the SUPCallbackHandler for that particular type. For example, if Customer is a generated MBO class, you can use the following code:

```
MyCustomerMBOCallbackHandler* handler =
[MyCustomerMBOCallbackHandler newHandler];
[Customer registerCallbackHandler:handler];
```

Asynchronous Operation Replay

Upload operation replay records asynchronously.

When an application calls submitPending on an MBO on which a create, update, or delete operation is performed, an operation replay record is created on the device local database.

When synchronize is called, the operation replay records are uploaded to the server. The method returns without waiting for the backend to replay those records. The synchronize method downloads all the latest data changes and the results of the previously uploaded operation replay records that the backend has finished replaying in the background. If you choose to disable asynchronous operation replay, each synchronize call will wait for the backend to finish replaying all the current uploaded operation replay records.

When SAP Mobile Platform does an update operation replay, if the primary key or foreign key of the MBO is generated by the EIS and the MBO's content coming from the device has no primary key or foreign key, the SAP Mobile Server loads the primary key or foreign key from the CDB to merge the incoming values with the CDB content so that a full row (graph) can be communicated to the EIS.

This feature is enabled by default. You can enable or disable the feature by setting the asyncReplay property in the synchronization profile. The following code shows how to disable asynchronous replay:

```
[[SMP101SMP101DB getSynchronizationProfile] setAsyncReplay:NO];
```

When the application is connected

(by Application.startConnection() or Application.registerApplication), it may receive background notifications and trigger a synchronize or other database operation. If you try to delete the database, you may receive database exceptions.

Before deleting the database, stop the application connection (Application.stopConnection()).

You can specify an upload-only synchronization where the client sends its changes to the server, but does not download other changes from the server. This type of synchronization conserves device resources when receiving changes from the server.

```
+ (void)beginSynchronize:(SUPObjectList*)synchronizationGroups withContext:(NSString*)context withUploadOnly:(BOOL) uploadOnly
```

When asynchronous replay is enabled and the replay is finished, the onSynchronize callback method is invoked with a SynchronizationStatus value of

SynchronizationStatus.ASYNC_REPLAY_COMPLETED. Use this callback method to invoke a synchronize call to pull in the results, as shown in the following callback handler.

Synchronizing Applications

Synchronize package data between the device and the server.

The generated database provides you with synchronization methods that apply to either all synchronization groups in the package or a specified list of groups.

For information on synchronizing DOE-based applications, see *Message-Based Synchronization APIs*.

Nonblocking Synchronization

An example that illustrates the basic code requirements for connecting to SAP Mobile Server, updating mobile business object (MBO) data, and synchronizing the device application from a device application based on the Client Object API.

Subscribe to the package using synchronization APIs in the generated database class, specify the groups to be synchronized, and invoke the asynchronous synchronization method (beginSynchronize).

- 1. Set the synchronization parameters if there are any.
- **2.** Make a blocking synchronize call to SAP Mobile Server to pull in all MBO data:

```
[SMP101SMP101DB synchronize];
```

3. List all customer MBO instances from the local database using an object query, such as findAll, which is a predefined object query.

```
SUPObjectList *objlist = [SMP101Customer findAll];
```

4. Find and update a particular MBO instance, and save it to the local database.

```
SMP101Customer *customer = [SMP101Customer findByPrimaryKey:
32838];
//Change some sttribute of the customer record
customer.fname= @"New Name";
[customer save];
```

5. Submit the pending changes. The changes are ready for upload, but have not yet been uploaded to the SAP Mobile Server.

```
[Customer submitPending];
```

6. Use non-blocking synchronize call to upload the pending changes to the SAP Mobile Server. The previous replay results and new changes are downloaded to the client device in the download phase of the synchronization session.

```
[SMP101SMP101DB beginSynchronize];
```

Specifying Personalization Parameters

Use personalization parameters to provide default values used with synchronization, connections with back-end systems, MBO attributes, or EIS arguments. The PersonalizationParameters class is within the generated code for your project.

1. To instantiate a PersonalizationParameters object, call the generated database instance's getPersonalizationParameters method:

```
pp = [SMP101SMP101DB getPersonalizationParameters];
```

2. Assign values to the PersonalizationParameters object:

```
pp.Pkcity = @"New York";
```

3. Save the PersonalizationParameters value to the local database:

```
[pp save]
```

Note: If you define a default value for a personalization key that value will not take effect, unless you call [pp save].

4. Synchronize the PersonalizationParameters value to the SAP Mobile Server: [SMP101SMP101DB synchronize];

Specifying Synchronization Parameters

Use synchronization parameters within the mobile application to download filtered MBO data.

Note: The getSynchronizationParameters method has been deprecated.

Assign the synchronization parameters of an MBO before a synchronization session. The next synchronize sends the updated synchronization parameters to the server.

1. List all the synchronization parameters.

```
SUPObjectList* r = [SKPKCustomer getSubscriptions];
```

2. Add synchronization parameters. This call adds and saves the synchronization parameters:

```
SKPKCustomerSubscription *sp = [SKPKCustomerSubscription
getInstance];
sp.name = @"example";
[SKPKCustomer addSubscription:sp];
```

3. Synchronize to download the data:

```
[SMP101SMP101DB synchronize];
```

Subsequently Starting an Application

Subsequent start-ups are different from the first start-up.

Starting an application on subsequent occasions:

- 1. Use the registrationStatus API in the SUPApplication class to determine if the application has already been registered. If it has been registered, then only perform the following steps:
 - **a.** Get the application instance.
 - **b.** Set the applicationIdentifier. The applicationIdentifier must be the same as the one used for initial registration.
 - **c.** Initialize the generated package database class with this application instance.

Note: Once the application is registered, changes to any of the application connection properties do not take effect. To modify the connection properties, unregister the application, change the connection properties and then register again. Unregistering the application also removes the user from the server.

2. Set up the connection profile properties if needed for database location and tuning parameters.

- 3. Set up the synchronization profile properties if needed for SSL or a relay server.
- **4.** Start the application connection to the server using the existing connection parameters and registration information.

```
[application startConnection];
```

Accessing MBO Data

Use MBO object queries to retrieve lists of MBO instances, or use dynamic queries that return results sets or object lists.

Object Queries

Use the generated static methods in the MBO classes to retrieve MBO instances.

- 1. To find all instances of an MBO, invoke the static findAll method contained in that MBO. For example, an MBO named Customer contains a method such as findAll.
- 2. To find a particular instance of an MBO using the primary key, invoke [MBO findByPrimaryKey:...]. For example, if a Customer has the primary key "key" as int, the Customer MBO would contain the + (Customer*) findByPrimaryKey: (int) key method, which performs the equivalent of Select x.* from Customer x where x.key = :key.

If the return type is a list, additional methods are generated for you to further process the result, for example, to use paging.

Dynamic Queries

Build queries based on user input.

Use the SUPQuery class to retrieve a list of MBOs.

1. Specify the **where** condition used in the dynamic query.

```
SUPQuery *myquery = [SUPQuery getInstance];
myquery.testCriteria = [SUPAttributeTest
match:@"fname" :@"Erin"];
```

2. Use the findWithQuery method in the MBO to dynamically retrieve a list of MBOs according to the specified attributes.

```
SUPObjectList* customers = [SampleAppCustomer
findWithQuery:myquery]
```

3. Use the generated database's executeQuery method to query multiple MBOs through the use of joins.

```
SUPQuery *query = [SUPQuery getInstance];
[query select:@"c.fname,c.lname,s.order_date,s.id"];
[query from:@"Customer":@"c"];
[query join:@"SalesOrder":@"s":@"s.cust_id":@"c.id"];
```

```
query.testCriteria = [SUPAttributeTest
match:@"c.lname":@"Smith"];
SUPQueryResultSet* resultSet = [SMP101SMP101DB
executeQuery:query];
if(resultSet == nil)
{
   MBOLog(@"executeQuery Failed !!");
   return;
}
for(SUPDataValueList* result in resultSet)
{
   MBOLog(@"Firstname,lastname,order date,region = %@ %@ %@ ",
   [SUPDataValue getNullableString:[result item:0]],
   [SUPDataValue getNullableString:[result item:1]],
   [SUPDataValue getNullableDate:[result item:2]] description],
   [SUPDataValue getNullableString:[result item:3]]);
}
```

MBOs with Complex Types

Mobile business objects are mapped to classes containing data and methods that support synchronization and data manipulation. You can develop complex types that support interactions with backend datasources such as SAP® and Web services. When you define an MBO with complex types, SAP Mobile Platform generates one class for each complex type.

Using a complex type to create an MBO instance.

1. Suppose you have an MBO named SimpleCaseList and want to use a complex data type called AuthenticationInfo to its Create method's parameter. Begin by creating the complex datatype:

```
AuthenticationInfo* authinfo;
authinfo = [AuthenticationInfo getInstance];
authinfo.userName=@"Francie";
```

2. Instantiate the MBO object:

```
SimpleCaseList *cr = [[SimpleCaseList alloc] init];
cr.company = @"Calbro Services";
```

3. Call the create method of the SimpleCaseList MBO with the complex type parameter as well as other parameters, and call submitPending() to submit the create operation to the operation replay record. Subsequent synchronizations upload the operation replay record to the SAP Mobile Server and get replayed.

```
[cr create:authinfo];
[cr submitPending];
```

Relationships

The Object API supports one-to-one, one-to-many, and many-to-one relationships.

Navigate between MBOs using relationships.

1. Suppose you have one MBO named Customer and another MBO named SalesOrder. This code illustrates how to navigate from the Customer object to its child SalesOrder objects:

```
SMP101Customer *customer = [SMP101Customer findByPrimaryKey:
32838];
SUPObjectList *orders = customer.salesOrders;
```

2. To filter the returned child MBO's list data, use the Ouery class:

```
SUPQuery *query = [SUPQuery getInstance];
[query select:@"c.fname,c.lname,s.order_date,s.region"];
[query from:@"Customer":@"c"];
[query join:@"SalesOrder":@"s":@"s.cust_id":@"c.id"];
query.testCriteria = [SUPAttributeTest
match:@"c.lname":@"Devlin"];
SUPQueryResultSet* resultSet = [SMP101SMP101DB
executeQuery:query];
```

3. For composite relationship, you can call the parent's SubmitPending method to submit the entire object tree of the parent and its children. Submitting the child MBO also submits the parent and the entire object tree. (If you have only one child instance, it would not make any difference. To be efficient and get one transaction for all child operations, it is recommended to submit the parent MBO once, instead of submitting every child).

If the primary key for a parent is assigned by the EIS, you can use a multilevel insert cascade operation to create the parent and child objects in a single operation without synchronizing multiple times. The returned primary key for the parent's create operation populates the children prior to their own creation.

The following example illustrates how to submit the parent MBO which also submits the child's operation:

```
SMP101Customer *customer = [SMP101Customer findByPrimaryKey:
32838];
customer.city = @"Dublin";
SMP101Sales_order* order = [SMP101Sales_order findByPrimaryKey:
1220];
order.region = @"SA"; //update any field
[order update]; //call update on the child record
[order refresh];
[order.customer submitPending];
```

Manipulating Data

Create, update, and delete instances of generated MBO classes.

You can create a new instance of a generated MBO class, fill in the attributes, and call the create method for that MBO instance.

You can modify an object loaded from the database by calling the update method for that MBO instance.

You can load an MBO from the database and call the delete method for that instance.

Creating, Updating, and Deleting MBO Records

Perform create, update, and delete operations on the MBO instances that you have created.

You can call the create, update, and delete methods for MBO instances.

Note: For MBOs with custom create or update operations with parameters, you should use the custom operations, rather than the default create and update operations. See *MBOs with Complex Types*.

1. Suppose you have an MBO named Customer. To create an instance within the database, invoke its create method, which causes the object to enter a pending state. Then call the MBO instance's submitPending method.

```
SMP101Customer *newcustomer = [[SMP101Customer alloc] init];
newcustomer.fname = @"John";
... //Set the required fields for the customer
[newcustomer create];
[newcustomer submitPending];
```

2. To update an existing MBO instance, retrieve the object instance through a query, update its attributes, and invoke its update method, which causes the object to enter a pending state. Then call the MBO instance's submitPending method. Finally, synchronize with the generated database:

```
SMP101Customer *customer = [SMP101Customer findByPrimaryKey:
32838]; //find by the primary key
customer.city = @"Dublin"; //update any field to a new value
[customer update];
[customer submitPending];
```

3. To delete an existing MBO instance, retrieve the object instance through a query and invoke its delete method, which causes the object to enter a pending state. Then call the MBO instance's submitPending method. Finally, synchronize with the generated database:

```
SMP101Customer *customer = [SMP101Customer findByPrimaryKey:
32838];
[customer delete];
[customer submitPending];
```

For an object tree with MBOs in a composite (cascading) relationship, submitPending submits changes found in the entire hierarchy. If each MBO in the hierarchy has its own CUD operations, the submitted object tree replays in this order:

- Create and Update: a preorder traversal, for example, parent -> left child -> right child. That is, create the parent before the children.
- Delete: a postorder traversal, for example, left child ->right child->parent.

Left and right in this context means from the first child in the children list to the last child. For a tree with multiple operation types, for example, root (update) and two children (one create and one update) and each child has two children, the order of the operation is: root

(update), child one(create), children of child one(create), children of child two (delete), child two (delete).

Other Operations

Use operations other than create, update, or delete.

In this example, a customized operator is used to perform a sum operation.

1. Suppose you have an MBO that has an operator that generates a customized sum. Begin by creating an object instance and assigning values to its attributes, specifying the "Add" operation:

```
SMP101CustomerOtherOperation *other =
[[SMP101CustomerOtherOperation alloc] init];
other.P1 = @"somevalue";
other.P2 = 2;
other.P3 = [NSDate date];
[other save];
```

Call the MBO instance's submitPending method and synchronize with the generated database:

```
[other submitPending];
[SMP101SMP101DB synchronize];
```

Using submitPending and submitPendingOperations

You can submit a single pending MBO, all pending MBOs of a single type, or all pending MBOs in a package. Once those pending changes are submitted, the MBOs enter a replay pending state. The next synchronization will submit those changes to the EIS.

Note: submitPendingOperations APIs are expensive. SAP recommends using the submitPending API with the MBO instance whenever possible.

Database Classes

Submit pending operations for all entities in the package or synchronization group, cancel all pending operations that have not been submitted to the server, and check if there are pending oprations for all entities in the package.

1. To submit pending operations for all pending entities in the package, invoke the generated database's submitPendingOperations method.

Note: submitPendingOperations APIs are expensive. SAP recommends using the submitPending API with the MBO instance whenever possible.

2. To submit pending operations for all pending entities in the specified synchronization group, invoke the generated database's + (void) submitPendingOperations: (NSString*) synchronizationGroup method.

3. To cancel all pending operations that have not been submitted to the server, invoke the generated database's cancelPendingOperations method.

Generated MBOs

Submit pending operations for all entities for a given MBO type or a single instance, and cancel all pending operations that have not been submitted to the server for the MBO type or a single entity.

1. To submit pending operations for all pending entities for a given MBO type, invoke the MBO class' static submitPendingOperations method.

Note: submitPendingOperations APIs are expensive. SAP recommends using the submitPending API with the MBO instance whenever possible.

- **2.** To submit pending operations for a single MBO instance, invoke the MBO object's submitPending method.
- **3.** To cancel all pending operations that have not been submitted to the server for the MBO type, invoke the MBO class' static cancelPendingOperations method.
- **4.** To cancel all pending operations for a single MBO instance, invoke the MBO object's cancel Pending method.
- **5.** For a single MBO, you must call the refresh () method of the MBO instance before you use this instance again.
- **6.** For related MBOs, you must call the refresh() method of the MBO instance before you use this instance again, even if the MBO's child or parent has called submitPending.

Shutting Down the Application

Shut down an application and clean up connections.

Closing Connections

Clean up connections from the generated database instance prior to application shutdown.

1. To release an opened application connection, stop the messaging channel by invoking the application instance's stopConnection method.

```
[app stopConnection:<timeout value>];
```

2. Use the closeConnection method to close all database connections for this package and release all resources allocated for those connections. This is recommended to be part of the application shutdown process.

Debugging Runtime Errors and Performance Analysis

To handle occurrences of exceptions and special conditions that change the normal flow of the program execution, you must perform error handling.

End to End Tracing

End to end tracing enables an application developer and end user to trace a request that is sent from the client to the back-end. This spans the entire landscape where you can derive a correlation of traces at the client, server and back-end.

These correlated traces help in performance analysis and are centrally monitored on SAP Solution Manager. These are displayed as reports where you can extract information on failure of delivering a request, time taken for a request to reach a component and so on.

On the client side, the client framework enables an application developer to switch on the trace for messages. The client traces the request at predefined points and all these transactions/ requests are recorded in a Business Transaction XML. Additionally, the client maintains a unique identifier in the HTTP header called the SAP Passport that is used to correlate traces across various components. This Business Transaction XML can later be uploaded to the SAP Solution Manager which is a central location to correlate all logging information.

Using Tracing APIs

Use these APIs to enable the application user to use End-to-End tracing.

The API consists of the following interfaces or classes:

- **SUPE2ETraceService** A public interface for use by the application's user interface developers.
- **SUPE2ETraceLevel** Defines an enumeration of the trace levels that you can set to a passport. Trace levels control the amount of logging done on the server side.
- **SUPE2ETraceServiceImpl** The implementation of the SUPE2EtraceService interface; the implementation is a singleton. There are additional methods for you to create a passport and business transaction.
- SUPE2ETraceMessage An entity class which holds the request/response details and statistics and the passport. Object API internally makes use of this class to add request/response details to the business transaction and to get a new passport for each new request. Object API sets the new passport to the HTTP header, 'SAP-PASSPORT' and sends it to the server side, so that the server can continue processing the E2E tracing.

Getting an Instance of the E2E Trace Service

Get an instance of the SUPE2ETraceService interface.

You can create a new instance in one of two ways.

Instantiate the object through its implementation class:

```
[SUPE2ETraceServiceImpl getInstance];
Instantiate the object through SUPApplication:
[SUPApplication getE2ETraceService];
```

Initializing the Trace

Set the trace level and start the trace. The SAP Mobile Server administrator sets the trace level from SAP Control Center.

Set the passport trace level to one of the following values.

Trace Level	Description
0 (NONE)	0 (NONE) Do not use. Not Supported. (Specific to trace analysis on the client. No traces are triggered on the server.)
1 (LOW)	Corresponds to response time- distribution analysis. This helps to analyse the time taken on each server component.
2 (MEDIUM)	Corresponds to performance analysis. Performance traces are triggered on the server side. Example: Introscope Transaction Trace, ABAP Trace, SQL Traces and so on.
3 (HIGH)	Corresponds to functional analysis.

```
SUPE2ETraceLevel level = SUPE2ETraceLevel_NONE;
switch (val)
{
  case 1:
    level = SUPE2ETraceLevel_LOW;
    break;
...
SUPE2ETraceServiceImpl *e2eTraceService = [SUPE2ETraceServiceImpl
getInstance];
[e2eTraceService setTraceLevel:level];
[e2eTraceService startTrace];
```

When you call the startTrace method, the SUPE2ETraceService initializes the trace and sets appropriate flags to indicate the trace has started. The method may perform other tasks as required by SAP's BTX API, such as getting a handle to the BTX writer from the BTX API.

Stopping the Trace

Stop appending trace data to the business transaction (BTX) and finish creating the BTX.

The stopTrace() method also retrieves the BTX byte array from the BTX writer and returns it to the calling code for further use (upload). Because the stopTrace() call clears

the BTX from memory, you must make sure to save the BTX for further use, such as uploading the trace.

```
NSData *btx = [ [SUPE2ETraceServiceImpl getInstance] stopTrace];
```

Uploading the BTX

Upload the business transaction to the server.

Upload the business transaction by calling uploadTrace: (NSData *) btx and passing the BTX byte array. The method returns true if the upload succeeds, otherwise it throws an SUPE2ETraceUploadException.

Call this blocking method in a separate thread other than the main application thread.

```
//ensure this blocking call gets executed in a separate thread
@try
{
   [traceService uploadTrace:btx];
}@catch (SUPE2ETraceUploadException *eue) {}
```

Tracking KPI

Access performance libraries for tracing or collecting key performance indicators (KPIs).

User interactions are measured in intervals of these types: HttpRequest, PersistenceRead, PersistenceWrite, SubmitPending, CancelPending, and Transaction. All intervals measure Wallclock Time, CPU Time, and Memory Max.

The HttpRequest interval type measures some additional KPIs:

- HttpRequest
 - NetworkTime
 - Roundtrips
 - Total Bytes
 - Sent Bytes
 - Received Bytes

After the interaction is stopped, a summary log in txt format is written to the device. The summary log contains sums of each of the KPI types. For example, total Wallclock Time, total CPU Time, total number of roundTrips, and so on. There is no detailed log that contains KPI values for each interval.

The administrator can invoke a Get Trace request through SAP Control Center to send the performance log to the server domain log.

To start collecting performance metrics, call the startInteraction method:

```
- (void) startInteraction: (NSString *) interactionName;
```

To stop collecting performance metrics and output a summary to the reporting target, call the stopInteraction method:

```
- (void)stopInteraction;
```

Example of application interactions for collecting KPI:

```
// get the instance
id <SUPPerformanceAgentService> pa = [SUPPerfAgentServiceImpl
getInstance];
[pa startInteraction:@"Interaction 1";];
// application interaction
// ...
[pa stopInteraction];

[pa startInteraction:@"Interaction 2";];
// application interaction
// ...
[pa stopInteraction];
```

The following limitations apply:

• On iOS devices, there is a detailed log file only written after the interaction is stopped. There is no report on the KPI values for each interval available.

Uninstalling the Application

Uninstall the application and clean up all package- and MBO-level data.

Deleting the Database and Unregistering the Application

Delete the package database, and unregister the application.

1. Unregister the application by invoking the Application instance's unregisterApplication method.

```
@try {
    [app unregisterApplication:<time out value>]
}
@catch (SUPApplicationTimeoutException * pe) {
    NSLog(@"%@: %@", [pe name], [pe message]);
}
```

2. To delete the package database, call the generated database's deleteDatabase method.

```
[SMP101SMP101DB deleteDatabase];
```

Recovering From SAP Mobile Server Failures

Add application code to check for and recover from SAP Mobile Server failures.

It is highly recommended that you add a catch call to all synchronize methods (synchronize(), begingSynchronize(), and so on) within your applications to

allow the application to recover if SAP Mobile Server fails and needs to be restored from an older database. If not, you may have to reinstall the application manually for all users so they can resynchronize with SAP Mobile Server.

See Restoring from an Older Backup Database File (Data Loss) in the System Administration Guide for information about SAP Mobile Server recovery.

As a best practice, and not included in these examples, application developers should include code that informs mobile application users about:

- What is going to happen (for example, reregistering, recreating the local database, and so on). And,
- The reason for the action (for example, lost registration, server is restored, and so on).

And prompt them for confirmation before executing the code.

Client Application Recovery Examples

These scenarios provide example code that illustrate how the client application recovers from SAP Mobile Server failures in various client application states.

When the SAP Mobile Server is restored to a previous state the client might be in an inconsistent state with that of the server. For example:

- Client synchronized with SAP Mobile Server after the time the database was backed up.
 The client cannot synchronize successfully with SAP Mobile Server once the database is
 restored.
- 2. Client registered with SAP Mobile Server after the time the database was backed up. Client registration was lost when the database was restored.

Client Application Registration Recovery Example

After SAP Mobile Server is restored, the client application connection information might be lost if the registration was created after the database was backed up.

This client application calls startConnection to connect to SAP Mobile Server. The onConnectionStatusChanged callback returns error code 580 with the message authentication failed. The user can reregister the application using SUPApplicationCallback implementation by this error code. If SAP Mobile Server is restored to a point in time when the client application has registered, startConnection should be able to start without error or with other errors when communications to SAP Mobile Server failed.

Note: In these code examples lines following "MyApplicationCallback.h" indicates they should be in the MyApplicationCallback.h header file. Similarly, code lines following "MyApplicationCallback.m" indicates they should be in the MyApplicationCallback.m file.

1. Automatic registration recover:

- (void) startApplication

```
SUPApplication *app = [SUPApplication getInstance];
   MyApplicationCallback *cb = [[[MyApplicationCallback alloc]
initl autoreleasel;
    [app setApplicationCallback:cb];
   @try
        SUPConnectionProperties *connProperties =
app.connectionProperties;
       connProperties.serverName = testServer;
       connProperties.portNumber = testPort;
        SUPLoginCredentials *login = [SUPLoginCredentials
getInstance];
        login.username = testUser;
       login.password = testPassword;
       connProperties.loginCredentials = login;
       if (app.registrationStatus ==
SUPRegistrationStatus UNREGISTERED)
            [app registerApplication:100]; // or call
app.RegisterApplication();
       else
            [app startConnection:100]; // or call
app.StartConnection();
    @catch (SUPApplicationRuntimeException *ex)
       NSLog(@"SUPApplicationRuntimeException(%d): %@",
ex.errorCode, ex.reason);
    @catch (SUPApplicationTimeoutException *ex)
       NSLog(@"SUPApplicationTimeoutException(%d): %@",
ex.errorCode, ex.reason);
   while (app.connectionStatus != SUPConnectionStatus CONNECTED
|| app.registrationStatus != SUPRegistrationStatus REGISTERED)
        if (cb.reregisterException != nil)
            // reregister hit exception
            @throw cb.reregisterException;
        sleep(1);
MyApplicationCallback.h
```

```
#import "SUPApplicationDefaultCallback.h"
@interface MyApplicationCallback : SUPApplicationDefaultCallback
@property(readwrite, nonatomic, assign) BOOL callFlag;
@property(readwrite, nonatomic, retain) NSException
*reregisterException;
@end
MyApplicationCallback.m
#import "MyApplicationCallback.h"
#import "SUPApplication.h"
#import "end2end rdbEnd2end rdbDB.h"
@implementation MyApplicationCallback
@synthesize callFlag;
@synthesize reregisterException;
- (id) init
   [super init];
   callFlag = NO;
   reregisterException = nil;
   return self;
- (void) onConnectionStatusChanged:
(SUPConnectionStatusType)connectionStatus:(int)errorCode:
(NSString *)errorMessage
   // error code 580 is
COMMUNICATION DEVICEVAL INVALID ACTIVE CODE
   if (errorCode == COMMUNICATION DEVICEVAL INVALID ACTIVE CODE
&& !callFlag)
       // this callback could be invoked multiple times when this
error occures,
      // but we just call once to reregister, so set the callFlag
to be true.
       callFlag = true;
        dispatch queue t queue =
dispatch get global queue (DISPATCH QUEUE PRIORITY HIGH, 0);
        dispatch async (queue, ^{
            [self reregister];
        });
```

```
- (void) reregister
    // do not unregister application, because the application
connection info
   // has been deleted from server side. We can call
registerApplication directly.
   @trv
        // call disable sync for all packages in this application
        [end2end rdbEnd2end rdbDB disableSync];
        SUPApplication *app = [SUPApplication getInstance];
        [app registerApplication:100];
        // call enable sync for all packages in this application
        [end2end rdbEnd2end rdbDB enableSync];
       NSLog(@"Done reregister.");
   @catch (NSException *exception)
      NSLog(@"reregister hit exception(%@): %@", exception.name,
exception.reason);
       self.reregisterException = exception;
@end
```

2. Manual registration recover - if error code 580 is encountered, register the application manually in SAP Control Center first, or else reregistering the application fails the first time. Manual registration requires an activation code be set:

```
- (void) startApplication
    SUPApplication *app = [SUPApplication getInstance];
   MyApplicationCallback *cb = [[[MyApplicationCallback alloc]
init] autorelease];
    [app setApplicationCallback:cb];
    @trv
        SUPConnectionProperties *connProperties =
app.connectionProperties;
       connProperties.serverName = testServer;
       connProperties.portNumber = testPort;
       connProperties.activationCode = @"100";
       SUPLoginCredentials *login = [SUPLoginCredentials
getInstance];
       login.username = testUser;
       login.password = nil;
       connProperties.loginCredentials = login;
        if (app.registrationStatus ==
```

```
SUPRegistrationStatus UNREGISTERED)
            [app registerApplication:100]; // or call
app.RegisterApplication();
       else
            [app startConnection:100]; // or call
app.StartConnection();
    @catch (SUPApplicationRuntimeException *ex)
       NSLog(@"SUPApplicationRuntimeException(%d): %@",
ex.errorCode, ex.reason);
   @catch (SUPApplicationTimeoutException *ex)
       NSLog(@"SUPApplicationTimeoutException(%d): %@",
ex.errorCode, ex.reason);
   while (app.connectionStatus != SUPConnectionStatus CONNECTED
| | app.registrationStatus != SUPRegistrationStatus REGISTERED)
        if (cb.reregisterException != nil)
            // reregister hit exception
            @throw cb.reregisterException;
        sleep(1);
    }
MyApplicationCallback.h
#import "SUPApplicationDefaultCallback.h"
@interface MyApplicationCallback : SUPApplicationDefaultCallback
@property(readwrite, nonatomic, assign) BOOL callFlag;
@property(readwrite, nonatomic, retain) NSException
*reregisterException;
@end
MyApplicationCallback.m
#import "MyApplicationCallback.h"
#import "SUPApplication.h"
```

```
#import "end2end rdbEnd2end rdbDB.h"
@implementation MyApplicationCallback
@synthesize callFlag;
@synthesize reregisterException;
- (id) init
   [super init];
   callFlag = NO;
   reregisterException = nil;
   return self;
- (void) onConnectionStatusChanged: (SUPConnectionStatusType)
connectionStatus :(int)errorCode :(NSString *)errorMessage
   // error code 580 is
COMMUNICATION DEVICEVAL INVALID ACTIVE CODE
   if (errorCode == COMMUNICATION DEVICEVAL INVALID ACTIVE CODE
&& !callFlag)
       // this callback could be invoked multiple times when this
error occures,
      // but we just call once to reregister, so set the callFlag
to be true.
        callFlag = true;
       dispatch queue t queue =
dispatch get global queue (DISPATCH QUEUE PRIORITY HIGH, 0);
        dispatch async (queue, ^{
            [self reregister];
        });
   }
- (void) reregister
   // do not unregister application, because the application
connection info
    // has been deleted from server side. We can call
registerApplication directly.
   @try
        // call disable sync for all packages in this application
        [end2end rdbEnd2end rdbDB disableSync];
       SUPApplication *app = [SUPApplication getInstance];
        [app registerApplication:100];
        // call enable sync for all packages in this application
        [end2end rdbEnd2end rdbDB enableSync];
       NSLog(@"Done reregister.");
```

```
@catch (NSException *exception)
{
    NSLog(@"reregister hit exception(%@): %@", exception.name,
exception.reason);
    self.reregisterException = exception;
}

@end
```

Client Application RBS Synchronize Recovery Example

if SAP Mobile Server is restored to a point in time of previous application synchronization, the client synchronization gets Sybase. Persistence. SynchronizeException with error code SQLE_UPLOAD_FAILED_AT_SERVER. This error code indicates the need to recover the client database.

If SAP Mobile Server is restored to a point in time of the application's last synchronization or the application has never synchronized, the client application can synchronize as normal without the exception. For example:

```
Time1: application registered and has not synchronized.
Time2: application synchronized for the first time.
Time3: application synchronized for the second time.
Time4: application synchronized for the last time.
```

If SAP Mobile Server is restored to time1 or time4, the client can synchronize successfully. If SAP Mobile Server is restored to time2 or time3, client synchronization fails with the exception. There are three ways to recover the client database and successfully synchronize. Before synchronization recovery, the application needs to complete application registration recovery if nessasary. Once the client application starts (startup), the application should check if the last recovery failed by checking the saved flag. If the last recovery failed, the application needs to resume the recovery first. The user can mark the recovery state any number of ways, for example, the application can save the recovery state to a file. As illustrated in example two below, copy the old client database and use it as a recovery state flag.

1. Recreate database without copying old data (all data lost) - the simplest way to recover, but the old data, such as synchronization parameter, SIS, Local MBO are not copied to the new database. The end user needs to re-input those again in the application UI.

```
}
- (void) recoverClientDatabase
{
    [self setRecoveringInPlaceFlag]; // Such as saving a flag in application sandbox.
    [end2end_rdbEnd2end_rdbDB closeConnection];
    [end2end_rdbEnd2end_rdbDB deleteDatabase];
    [self clearRecoveringInPlaceFlag];
}
```

2. Recreate database and copy old database (local transaction lost) - the old database data is copied to the new database; this example includes personalization keys, subscription information, SIS info, local MBO. But un-submitted transactions like MBO's pending state are lost. This sample code checks that a copy of the database is available to see if recovering was interrupted.

```
if([self isRecoverFailed])
        [self recoverClientDatabase];
    else
        @trv
            [end2end rdbEnd2end rdbDB synchronize];
        @catch (SUPPersistenceException *ex)
            if (ex.errorCode == SYNC UPLOAD FAILED AT SERVER)
                [self recoverClientDatabase];
            else
                @throw ex;
        }
- (BOOL)isRecoverFailed
   NSString* dbFile = [end2end rdbEnd2end rdbDB getDbPath];
   NSString* recoverDbFile = [\overline{N}SString]
stringWithFormat:@"%@.recover.udb", dbFile];
   NSFileManager *fm = [NSFileManager defaultManager];
   BOOL ok = YES;
    if ([fm isReadableFileAtPath:recoverDbFile])
        // Recover DB exists, indicating the last recover was not
finished
        // need to copy back the DB file and do recovery.
        if ([fm isReadableFileAtPath:dbFile])
        {
            if (![fm removeItemAtPath:dbFile error:nil])
```

```
ok = NO:
        }
        if (ok && [fm copyItemAtPath:recoverDbFile toPath:dbFile
error:nill)
        {
           return YES;
       else
            @throw [NSException exceptionWithName:@"NSException"
reason: @"Failed to copy the recover database back." userInfo:nil];
   return NO;
- (void) recoverClientDatabase
   NSString* dbFile = [end2end rdbEnd2end rdbDB getDbPath];
   NSString* recoverDbFile = [NSString
stringWithFormat:@"%@.recover.udb", dbFile];
   NSFileManager *fm = [NSFileManager defaultManager];
   if (![fm copyItemAtPath:dbFile toPath:recoverDbFile
error:nill)
        @throw [NSException exceptionWithName:@"NSException"
reason: @"Failed to copy the recover database." userInfo:nil];
    //retrieve all the subscriptions from client database
    SUPObjectList *customerWithParamSubscriptions =
[end2end rdbCustomerWithParam getSubscriptions];
   SUPObjectList *sisSubscriptions = [[end2end rdbSISSubscription
getInstance] findAll];
   NSMutableArray *syncedPublications = [NSMutableArray
arrayWithCapacity:2];
   // check all the synchronization group, if is synchronized, add
to new sync group to synchronize
   if ([end2end rdbEnd2end rdbDB
isSynchronized:@"synchronizationGroup"])
   {
        [syncedPublications addObject:@"synchronizationGroup"];
   }
   //retrieve all local MBO from client database
   SUPObjectList* localBookList = [end2end rdbLocalBook findAll];
   // Done with saving information, close connection and delete
the database
```

```
[end2end rdbEnd2end rdbDB closeConnection];
    [end2end rdbEnd2end rdbDB deleteDatabase];
   // new subscription
    [end2end rdbEnd2end rdbDB subscribe];
   // merge old local BO data to new database
   for (id lbo in localBookList)
       end2end rdbLocalBook *savedLocalBook =
(end2end rdbLocalBook*)lbo;
       end2end rdbLocalBook *localBook = [end2end rdbLocalBook
getInstance];
       [localBook copyAll:savedLocalBook];
        [localBook create];
   }
   // add all the subscriptions from old database to new database
   for (id sub in customerWithParamSubscriptions)
        end2end rdbCustomerWithParamSubscription *csub =
(end2end rdbCustomerWithParamSubscription*) sub;
        [end2end rdbCustomerWithParam addSubscription:csub];
   for (id sub in sisSubscriptions)
        end2end rdbSISSubscription* ssub =
(end2end rdbSISSubscription*) sub;
      id<SUPSynchronizationGroup> sg = [end2end rdbEnd2end rdbDB
getSynchronizationGroup:ssub.syncGroup];
        sq.enableSIS = ssub.enable;
       [sg save];
   }
   // synchronize for the synchronized publications
   NSString* syncGroups = [syncedPublications
componentsJoinedByString:@","];
    [end2end rdbEnd2end rdbDB synchronize:syncGroups];
   // finally delete the backup recover database file
   if (![fm removeItemAtPath:recoverDbFile error:nil])
         @throw [NSException exceptionWithName:@"NSException"
reason:@"Failed to remove the recover database." userInfo:nil];
   }
```

3. Recover with local transactions - a complete way to recover. Both one and two above lose local transactions. If you do not want to lose the local transaction when encountering the SQLE_UPLOAD_FAILED_AT_SERVER exception, have the SAP Mobile Server Administrator remove the client remote id info, which can be found in the mlsrv_err.log, by calling the ml_delete_remote_id procedure in the CDB to remove the remote id. Then the user can continue to synchronize using the old database to

upload all pending operations. Once uploaded, user\application must recreate the database using example one or two, and must **not** reuse the old database anymore. The mlsrv err.log logs remote id error entries similar to this:

Client Application RBS BeginSynchronize Recovery Example

BeginSynchronize is an asynchronous pattern, requiring the user to override the onSynchronize method of the SUPDefaultCallbackHandler class to check for the SQLE_UPLOAD_FAILED_AT_SERVER error.

The user has the same three methods as mentioned in the *Client Application RBS Synchronize Recovery Example* to recover the client database. Sample code uses the second method and implements the AsyncCallbackHandler:

```
if([AsyncCallbackHandler isRecoverFailed])
        [AsyncCallbackHandler recoverClientDatabase];
   else
        @try
            SUPObjectList* syncList = [SUPObjectList getInstance];
            [syncList add:@"default"];
            [self synchronize:syncList];
        @catch (SUPPersistenceException *ex)
            NSLog(@"sync failed(%d): %@", ex.errorCode, ex.reason);
    }
- (void) synchronize: (SUPObjectList*) syncGroups
   AsyncCallbackHandler* callback = [[[AsyncCallbackHandler alloc]
init] autorelease];
   SUPObjectList* sgs = [SUPObjectList getInstance];
    for (NSString* sg in syncGroups) {
        [sqs add:[end2end rdbEnd2end rdbDB
getSynchronizationGroup:sg]];
   callback.userContext = @"fistBeginSync";
    [end2end rdbEnd2end rdbDB registerCallbackHandler:callback];
    [end2end rdbEnd2end rdbDB beginSynchronize:sgs
```

```
withContext:callback.userContext];
    int waitCount = 0;
    while (![callback syncDone])
        if (waitCount++ > maxWaitTime)
           NSString *msg = [NSString stringWithFormat:@"No response
returned from server after waiting %d seconds", maxWaitTime];
            @throw [NSException exceptionWithName:@"NSException"
reason:msg userInfo:nill;
        sleep(1);
    }
    callback.recoveryInProgress = NO;
   callback.recoveryDone = NO;
   callback.syncDone = NO;
    callback.userContext = nil;
   if ([callback errorMessage] != nil)
        NSString* errMessage = callback.errorMessage;
        callback.errorMessage = nil;
        @throw [NSException exceptionWithName:@"NSException"
reason:errMessage userInfo:nil];
   }
// AsyncCallbackHandler.h
#import "SUPDefaultCallbackHandler.h"
@interface AsyncCallbackHandler : SUPDefaultCallbackHandler
@property(readwrite, nonatomic, assign) BOOL recoveryInProgress;
@property(readwrite, nonatomic, assign) BOOL recoveryDone;
@property(readwrite, nonatomic, assign) BOOL syncDone;
@property(readwrite, nonatomic, retain) NSString* userContext;
@property(readwrite, nonatomic, retain) NSString* errorMessage;
+ (BOOL) is Recover Failed;
+ (void) recoverClientDatabase;
@end
// AsyncCallbackHandler.m
#import "AsyncCallbackHandler.h"
#import "end2end rdbEnd2end rdbDB.h"
#import "end2end rdbCustomerWithParam.h"
#import "end2end rdbSISSubscription.h"
#import "end2end rdbLocalBook.h"
```

```
@implementation AsyncCallbackHandler
@synthesize recoveryInProgress;
@synthesize recoveryDone;
@synthesize syncDone;
@synthesize userContext;
@synthesize errorMessage;
- (id) init
   [super init];
   recoveryInProgress = NO;
   recoveryDone = NO;
   userContext = nil;
   errorMessage = nil;
   return self;
- (SUPSynchronizationActionType) onSynchronize:
(SUPObjectList*) syncGroupList withContext:
(SUPSynchronizationContext*) context
    NSException *ex = context.exception;
    if ((ex != nil) && [ex isKindOfClass:[SUPPersistenceException
class]])
        SUPPersistenceException *pe = (SUPPersistenceException*)ex;
        if (pe.errorCode == SYNC UPLOAD FAILED AT SERVER)
            if (!recoveryInProgress)
                recoveryInProgress = YES;
                recoveryDone = NO;
                dispatch queue t queue =
dispatch get global queue (DISPATCH QUEUE PRIORITY HIGH, 0);
                dispatch async(queue, ^{
                    @trv {
                       [AsyncCallbackHandler recoverClientDatabase];
                    @catch (NSException *exception) {
                        errorMessage = exception.reason;
                    recoveryDone = YES;
                    recoveryInProgress = NO;
                    syncDone = YES;
                });
        }
        return SUPSynchronizationAction CONTINUE;
    if (context.userContext != nil)
        if ([context.userContext isKindOfClass:[NSString class]])
```

```
NSString *userCtx = (NSString*)context.userContext;
            if ([userCtx isEqualToString:@"firstBeginSync"])
                if (context.status ==
SUPSynchronizationStatus FINISHING || context.status ==
SUPSynchronizationStatus ERROR)
                    syncDone = YES;
            }
        }
    }
    return SUPSynchronizationAction CONTINUE;
 (BOOL) is Recover Failed
   NSString* dbFile = [end2end rdbEnd2end rdbDB getDbPath];
   NSString* recoverDbFile = [\overline{N}SString]
stringWithFormat:@"%@.recover.udb", dbFile];
   NSFileManager *fm = [NSFileManager defaultManager];
    BOOL ok = YES;
    if ([fm isReadableFileAtPath:recoverDbFile])
        // Recover DB exists, indicating the last recover was not
finished
        // need to move back the DB file and do recovery.
        if ([fm isReadableFileAtPath:dbFile])
            if (![fm removeItemAtPath:dbFile error:nil])
                ok = NO;
        if (ok && [fm moveItemAtPath:recoverDbFile toPath:dbFile
error:nil])
            return YES;
        else
            @throw [NSException exceptionWithName:@"NSException"
reason:@"Failed to copy the recover database back." userInfo:nil];
    }
    return NO;
 (void) recoverClientDatabase
    NSString* dbFile = [end2end rdbEnd2end rdbDB getDbPath];
```

```
NSString* recoverDbFile = [NSString
stringWithFormat:@"%@.recover.udb", dbFile];
   NSFileManager *fm = [NSFileManager defaultManager];
   if (![fm copyItemAtPath:dbFile toPath:recoverDbFile error:nil])
        @throw [NSException exceptionWithName:@"NSException"
reason: @"Failed to copy the recover database." userInfo:nil];
    //retrieve all the subscriptions from client database
   SUPObjectList *customerWithParamSubscriptions =
[end2end rdbCustomerWithParam getSubscriptions];
    SUPODjectList *sisSubscriptions = [[end2end rdbSISSubscription
getInstance] findAll];
   NSMutableArray *syncedPublications = [NSMutableArray
arrayWithCapacity:21;
   // check all the synchronization group, if is synchronized, add to
new sync group to synchronize
   if ([end2end rdbEnd2end rdbDB
isSynchronized:@"synchronizationGroup"])
        [syncedPublications addObject:@"synchronizationGroup"];
    }
   //retrieve all local BO from client database
   SUPObjectList* localBookList = [end2end rdbLocalBook findAll];
   // Done with saving information, close connection and delete the
database
    [end2end rdbEnd2end rdbDB closeConnection];
    [end2end rdbEnd2end rdbDB deleteDatabase];
   // new subscription
    [end2end rdbEnd2end rdbDB subscribe];
   // merge old local BO data to new database
   for (id lbo in localBookList)
        end2end rdbLocalBook *savedLocalBook =
(end2end rdbLocalBook*) lbo;
        end2end rdbLocalBook *localBook = [end2end rdbLocalBook
getInstance];
        [localBook copyAll:savedLocalBook];
        [localBook create];
    // add all the subscriptions from old database to new database
   for (id sub in customerWithParamSubscriptions)
        end2end rdbCustomerWithParamSubscription *csub =
(end2end rdbCustomerWithParamSubscription*) sub;
       [end2end rdbCustomerWithParam addSubscription:csub];
```

```
for (id sub in sisSubscriptions)
       end2end rdbSISSubscription* ssub =
(end2end rdbSISSubscription*) sub;
        id<SUPSynchronizationGroup> sq = [end2end rdbEnd2end rdbDB
getSynchronizationGroup:ssub.syncGroup];
       sq.enableSIS = ssub.enable;
       [sq save];
   }
   // synchronize for the synchronized publications
   NSString* syncGroups = [syncedPublications
componentsJoinedByString:@","];
   [end2end rdbEnd2end rdbDB synchronize:syncGroups];
   // finally delete the backup recover database file
   if (![fm removeItemAtPath:recoverDbFile error:nil])
        @throw [NSException exceptionWithName:@"NSException"
reason: @"Failed to remove the recover database." userInfo:nill;
@end
```

MBS for DOEC Client Application Recovery Example

MBS for DOEC clients can run on the iOS platform. The registration recovery is the same as RBS registration recovery. However, subscription recovery is different.

There are two scenarios:

1. SAP Mobile Server is restored to a point in time where the client unsubsribed - after SAP Mobile Server is restored, the client status is unsubsribed on the server side, but the client status may be subscribed or unsubscribed. Therefore, the client application should check the client subscription status: if subscribed, call Unsubscribe(this leads to unsubscribe failure message because server does not have client subscribe info), then call Subscribe, if unsubscribed, call Subscribe:

2. SAP Mobile Server is restored to a point in time where the client subsribed - after SAP Mobile Server is restored, the client status is subsribed on the server side. For this scenario, the client can check if it's subsribed. If not, call Subscribe to recover, After SAP Mobile

Server is restored, the SAP Control Center Administrator can also delete the subscription from SAP Mobile Server. This time, SAP Mobile Server sends an unsubscribe message to the client application. When the client application is running, it receives the unsubscribe message, then the client generated database calls DB.CleanAllData() to clean the client data and update status to unsubscribed. The client application needs to then call Subscribe:

```
// sleep some time to receive server unsubscribe messages when
application starts up
   if (![end2end_rdbEnd2end_rdbDB isSubscribed])
   {
       [end2end_rdbEnd2end_rdbDB subscribe];
   }
```

Testing Applications

Test native applications on a device or simulator.

For additional information about testing applications, see these topics in the Mobile Application Life Cycle collection:

- Recommended Test Methodologies
- Best Practices for Testing Applications on a Physical Device

Testing an Application Using a Emulator

Run and test the application on an emulator and verify that the application automatically registers to the SAP Mobile Server using the default application connection template.

- 1. In Xcode, select **Product** > **Build** and then **Product** > **Run**. The project is built and the iPhone Simulator starts.
- 2. In the iPhone applications screen, open the application.
- 3. In SAP Control Center, verify that the application connection was created in **Applications** > **Application Connections**.
 - When the application has successfully registered, the application connection displays a value of zero in the Pending Items column. The Pending Items column is used only for messaging applications.
- **4.** Test the functionality of the application. Use debug tools as necessary, setting breakpoints at appropriate places in the application.

Client-Side Debugging

Identify and resolve client-side issues while debugging the application.

Problems on the device client side that may cause client application problems:

- SAP Mobile Server connection failed use your device browser to check the connectivity
 of your device to the server.
- Data does not appear on the client device check if your synchronization and personalization parameters are set correctly. If you are using queries, check if your query conditions are correctly constructed and if the device data match your query conditions.
- Physical device problems, such as low memory implement
 ApplicationCallback.onDeviceConditionChanged to be notified if
 device storage gets too low, or recovers from an error.

To find out more information on the device client side:

Testing Applications

- If you have implemented debugging in your generated or custom code (which SAP recommends), turn on debugging and review the debugging information. See the API Reference information about using the Logger class to add logs to the client log record and synchronize them to the server (viewable in SAP Control Center).
- Check the log record on the device. Use the getLogRecords (SUPQQuery) or getLogRecords methods.

This is the log format

level, code, eisCode, message, component, entityKey, operation, requestI
d, timestamp

This log format generates output similar to:

```
level code eisCode message component entityKey operation requestId
timestamp
5,500,'','java.lang.SecurityException:Authorization failed:
Domain = default Package = end2end.rdb:1.0 mboName =
simpleCustomer action =
delete','simpleCustomer','100001','delete','100014','2010-05-11
14:45:59.710'
```

- level the log level currently set. Values include: 1 = TRACE, 2 = DEBUG, 3 = INFO, 4 = WARN, 5 = ERROR, 6 = FATAL, 7 = OFF.
- code SAP Mobile Server administration codes.
 - Synchronization codes:
 - 200 success.
 - 500 failure.
- eisCode maps to HTTP error codes. If no mapping exists, defaults to error code 500 (an unexpected server failure).
- message the message content.
- component MBO name.
- entityKey MBO surrogate key, used to identify and track MBO instances and data.
- operation operation name.
- requestId operation replay request ID or messaging-based synchronization message request ID.
- timestamp message logged time, or operation execution time.
- If you have implemented ApplicationCallback.onConnectionStatusChanged for synchronization in the CallbackHandler, the connection status between the SAP Mobile Server and the device is reported on the device. See the SUPCallbackHandler API reference information. The device connection status, device connection type, and connection error message are reported on the device:
 - 1 current device connection status.
 - 2 current device connection type.

- 3 connection error message.
- For other issues, you can turn on SQLTrace trace on the device side to trace Client Object API activity. To enable SQLTrace using the ConnectionProfile's enableTrace API:

```
SUPConnectionProfile *cp = [SMP101SMP101DB getConnectionProfile];
// To enable trace of client database operations (SQL statements,
etc.)
[cp enableTrace:YES];
// To enable trace of client database operations with values also
displayed
[cp enableTrace:YES withPayload:YES];
// To disable trace of client database operations
[cp enableTrace:NO];
// To enable trace of message headers sent to the server and
received from the server
// (this replaces the MBODebugLogger and MBODebugSettings used in
earlier versions of SUP)
[cp.syncProfile enableTrace:YES];
// To enable trace of both message headers and content, including
credentials
[cp.syncProfile enableTrace:YES withPayload:YES];
// To disable messaging trace
[cp.syncProfile enableTrace:NO];
```

Server-Side Debugging

Identify and resolve server-side issues while debugging the application.

Problems on the SAP Mobile Server side may cause device client problems:

- The domain or package does not exist. If you create a new domain, with a default status of disabled, it is unavailable until enabled.
- Authentication failed for the application user credentials.
- The operation role check failed for the synchronizing user.
- · Back-end authentication failed.
- An operation failed on the remote, replication database back end, for example, a table or foreign key does not exist.
- An operation failed on the Web Service, REST, or SAP® back end.

To find out more information on the SAP Mobile Server side:

- Check the SAP Mobile Server log files.
- For message-based synchronization mode, you can set the log level to DEBUG to obtain detailed information in the log files:

 Set the log level using SAP Control Center. See SAP Control Center for SAP Mobile Platform > Administer > SAP Mobile Server > Server Log > SAP Mobile Server Runtime Logging > Configuring SAP Mobile Server Log Settings.

Note: Return to INFO mode as soon as possible, since DEBUG mode can affect system performance.

- Obtain DEBUG information for a specific device:
 - In the SCC administration console:
 - 1. Set the DEBUG level to a higher value for a specified device:
 - a. In SCC, select Application Connections, then select Properties... > Device Advanced.
 - **b.** Set the Debug Trace Level value.
 - 2. Set the TRACE file size to be greater than 50KB.
 - **3.** View the trace file through SCC.
 - Check the SMP_HOME\Servers\UnwiredServer\logs\ClientTrace
 directory to see the mobile device client log files for information about a specific
 device.

Note: Return to INFO mode as soon as possible, since DEBUG mode can affect system performance.

Improve Synchronization Performance by Reducing the Log Record Size

Improve synchronization performance and free SAP Mobile Server resources by deleting log records from SAP Mobile Server and the client when no longer needed.

A large log record table can negatively impact client synchronization performance. Each package contains a single log record table that consists of:

- SAP Mobile Server operation replay logs downloaded to the device when the application synchronizes. SAP Mobile Server generates a log record if the operation replay fails, or succeeds but results in a warning.
- Client logs generated by the application uploaded from the device to SAP Mobile Server for audit and logging purposes.

If the application and SAP Mobile Server do not delete these log records, the log record table continues to grow.

Unrestricted growth of the log record table eventually affects synchronization performance. You can view client log records from SAP Control Center; however, this displays only active log records (that is, those that have not been logically deleted). A logically deleted log record is marked for deletion but retained until the application downloads the delete record and deletes the copy from the device. Once SAP Mobile Server confirms that the application has

downloaded the delete, the inactive log record can be physically removed from SAP Mobile Server.

Determining the Log Record Size

Use Sybase Central TM to query the database of a given SAP Mobile Server to determine the size of the log record.

Prerequisites

SAP Mobile Platform services must be running and at least one Mobile Application project deployed to SAP Mobile Server.

Task


Launch Sybase Central (scjview.exe) to manage SQL Anywhere[®] and UltraLite[®] databases.

The default installation location of the Sybase Central executable is SMP_HOME \Servers\SQLAnywhere12\BIN32\scjview.exe.


- 2. From Sybase Central connect to the database server by selecting Connections > Connect with SQL Anywhere 12.
- 3. Provide connection details and click Connect.

For example, select Connect to a running database on this computer and enter:


- User ID and Password dba and sql respectively
- **Server name** *hostName* primary
- Database name default.

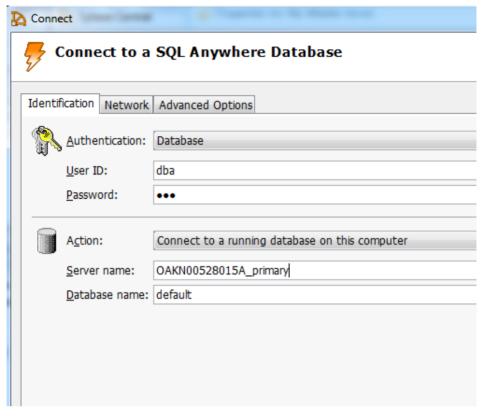

4. Double-click the **Tables** folder and search for the log record table. The log record name is typically *packageName*_logr... where *packageName* is the name of the deployed package.

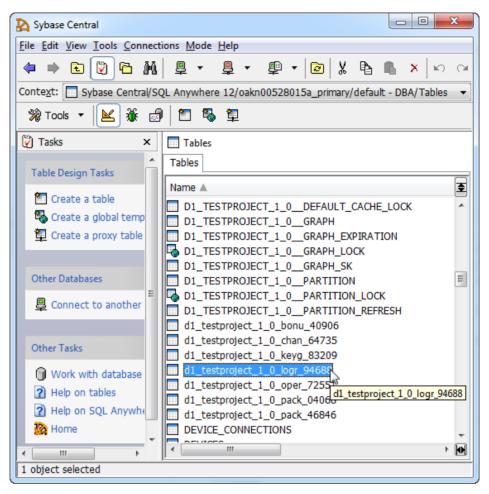

- 5. Right-click the log record table and select Properties.
- **6.** In the Properties dialog, select the **Miscellaneous** tab, then click **Calculate**.

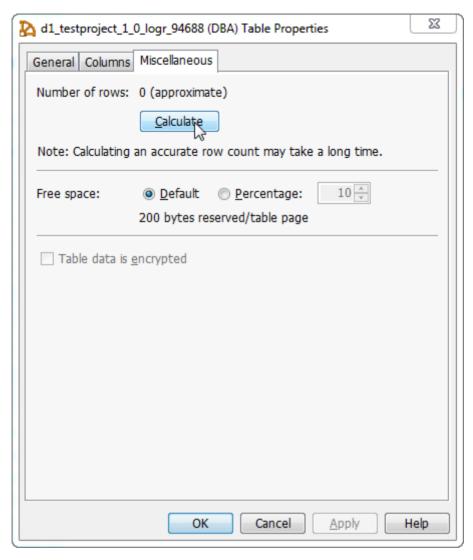

The number returned includes logically deleted rows. The returned number of rows depends on the number of application users of the package, and the retention window setting. As a general guideline, the number of rows should be fewer than 10,000.

Reducing the Log Record Size

Use SAP Control Center to delete log record entries by setting a date range window.

The SAP Mobile Server does not remove any logically deleted rows until it receives confirmation that the device hosting the application has synchronized after the record is logically deleted from SAP Mobile Server.

- 1. Clean up the client log data:
 - a) Expand **Domains** > **default** > **Packages**.
 - b) Select *packageName* then select the **Client Log** tab.
 - c) Select Clean, then enter starting and ending dates.

The LOGICAL_DEL flag is set to true for records within the range.

Note: Allow time for clients to synchronize. Logically deleted records are retained until the client synchronizes and downloads the delete records that clean up the client database. The length of time to wait for synchronization to complete depends on the clients' activities.

- d) Click **OK** to clean the client log data.
- 2. Clean the logically deleted records from SAP Mobile Server:
 - a) Select the General tab.
 - b) Select Error Cleanup.

This starts a cleanup task that asynchronously removes all logically deleted records from clients that have performed a synchronization after the time specified in the Clean operation.

For example, if the Clean operation is performed at 1:00am on Feb 27, all clients that synchronize after that time have their records physically removed. As a result, it takes time to reduce the size of the log record table.

Note: Clean up the client log data (step one) during periods of low client activity: when a single transaction processing a large log record table is active, client synchronization is blocked, degrading client responses and performance. As a best practice, once the log record table has been cleaned to a reasonable size, schedule the clean/error cleanup tasks on a daily basis.

Testing Applications

Localizing Applications

In iOS, you use Interface Builder, which is part of Xcode, to define and layout controls in a view of the user interface. These descriptions are stored in Xcode Interface Builder (XIB) files. Once you have the English version of the layout defined you will need to create an XIB file for each language you want to support in your user interface.

Localizing Menus and Interfaces

Localize the menus and interfaces for an iOS application by selecting an XIB file to localize, and a language for localization.

- 1. Select the Xcode Interface Builder (XIB) file you want to localize in the Project Explorer.
- **2.** Open the File Inspector by selecting **View** > **Utilities** > **File Inspector**. The File Inspector appears in a pane of the right of the Xcode window.
- 3. In the Localization section of the File Inspector pane, click the + button at the bottom of the section.
 - This step makes the XIB file localizable by moving it into a folder named en.lproj.
- **4.** Click the + button again. A menu appears with a list of languages.
- 5. Select the language you want to use in localizing the XIB file.

The Localization section of the File Inspector displays the languages to which the file has been localized (in the example, French and English).

The file's icon in the Project Explorer has a disclosure arrow next to it. Click the arrow to reveal the contents of the file. The Project Explorer displays one copy of the XIB file for each language you have chosen.

- **6.** Double-click on each icon to open it in a new tab or new window.
- 7. Make the required changes to the interface elements in the language-specific XIB file, and then save the file.
- **8.** Verify that the localized XIB files are added to the list of files copied into the application's bundle. If not:
 - a) Click the project icon in the Project Explorer, and then click the Target icon.
 - b) Select the Build Phases tab.
 - c) Expand the Copy Bundle Resources section, and then click the + button.
 - d) Select the additional XIB files from the <language>.lproj folders and click Add.

Localizing Embedded Strings

Localize embedded strings that are used in alert and dialog windows.

1. For each user interface string in your code, set the text property to a literal string using the NSLocalizedString macro.

```
UserInterfaceLabel.text = NSLocalizedString(@"Display text",
nil);
```

- 2. Generate the .strings files from all the NSLocalizedString references in your application. by using the genstrings command line program. See Apple documentation for command syntax and parameters.
 This command processes files in your directory hierarchy and creates .strings files for them in the en.lproj directory.
- **3.** Provide your translator a copy of the .strings file. The translator should translate the right side of each of the .strings file entries.

Validating Localization Changes

Test that your changes appear in your application.

- 1. Launch the iOS simulator then launch Settings.app.
- 2. Select General > International > Language.
- **3.** Select the language you want to test. The simulator restarts in the new language.
- **4.** Launch your application and verify that it is localized.

Packaging Applications

Package applications according to your security or application distribution requirements.

You can package all libraries into one package. This packaging method provide more security since packaging the entire application as one unit reduces the risk of tampering of individual libraries.

You may package and install modules separately only if your application distribution strategy requires sharing libraries between SAP Mobile Platform applications.

Signing

Code signing is required for applications to run on physical devices.

Apple Push Notification Service Configuration

The Apple Push Notification Service (APNS) notifies users when information on a server is ready to be downloaded.

Apple Push Notification Service (APNS) allows users to receive notifications. APNS:

- Must be set up and configured by an administrator on the server.
- Must be enabled by the user on the device.
- Can be used with any device that supports APNS. Some older Apple devices may not support APNS.
- Cannot be used on a simulator.

Preparing an Application for Apple Push Notification Service

There are several development steps to perform before the administrator can configure the Apple Push Notification Service (APNS).

- 1. Sign up for the iOS Developer Program, which gives you access to the Developer Connection portal. Registering as an enterprise developer gets you the certificate you need to sign applications.
- 2. Create an App ID and ensure that it is configured to use Apple Push Notification Service (APNS).
 - Do not use wildcard characters in App IDs for iPhone applications that use APNS.
- **3.** Create and download an enterprise APNS certificate that uses Keychain Access in the Mac OS. The information in the certificate request must use a different common name than the

development certificate that may already exist. The reason for this naming requirement is that the enterprise certificate creates a private key, which must be distinct from the development key. Import the certificate as a login Keychain, not as a system Keychain. Validate that the certificate is associated with the key in the Keychain Access application. Get a copy of this certificate.

- **4.** Create an enterprise provisioning profile and include the required device IDs with the enterprise certificate. The provisioning profile authorizes devices to use applications you have signed.
- **5.** Create the Xcode project, ensuring the bundle identifier corresponds to the bundle identifier in the specified App ID.
- **6.** To enable the APNS protocol, you must implement several methods in the application by adding the code below:

Note: The location of these methods in the code depends on the application; see the APNS documentation for the correct location.

```
//Enable APNS
[[UIApplication sharedApplication]
registerForRemoteNotificationTypes:
    (UIRemoteNotificationTypeBadge |
    UIRemoteNotificationTypeSound
    UIRemoteNotificationTypeAlert) ];
* Callback by the system where the token is provided to the client
application so that this
can be passed on to the provider. In this case,
"deviceTokenForPush" and "setupForPush"
are APIs provided by SAP Mobile Platform to enable APNS and pass
the token to the SAP Mobile Server
- (void) application: (UIApplication *) app
didRegisterForRemoteNotificationsWithDeviceToken:
  (NSData *) devToken
   MBOLogInfo(@"In did register for Remote Notifications",
devToken);
    [SUPPushNotification setupForPush:app];
    [SUPPushNotification deviceTokenForPush:app
deviceToken:devToken];
* Callback by the system if registering for remote notification
failed.
- (void) application: (UIApplication *) app
didFailToRegisterForRemoteNotificationsWithError:
      (NSError *)err {
       MBOLogError(@"Error in registration. Error: %@", err);
// You can alternately implement the pushRegistrationFailed API
inside the didFailToRegisterForRemoteNotificationsWithError
```

```
method:
// +(void)pushRegistrationFailed:(UIApplication*)application
errorInfo: (NSError *)err

* Callback when notification is sent.

- (void)application:(UIApplication *)app
didReceiveRemoteNotification:(NSDictionary *)
    userInfo
{
    MBOLogInfo(@"In did receive Remote Notifications", userInfo);
}

// You can alternately implement the pushNotification API inside the didReceiveRemoteNotification method:
+(void)pushNotification:(UIApplication*)application notifyData:(NSDictionary *)userInfo
```

Configuring Apple Push Notification Service

Use Apple Push Notification Service (APNS) to push notifications from SAP Mobile Server to the iOS application. Notifications might include badges, sounds, or custom text alerts. Device users can use Settings to customize which notifications to receive or ignore.

Prerequisites

Perform these prerequisites in the Apple Developer Connection Portal:

- Register for the iPhone Developer Program as an enterprise developer to access the Developer Connection portal and get the certificate required to sign applications.
- Create an App ID and ensure that it is configured to use Apple Push Notification Service (APNS).
- Create and download an enterprise APNS certificate that uses Keychain Access in the Mac OS. The information in the certificate request must use a different common name than the development certificate development teams might already have. This is because the enterprise certificate also creates a private key, which must be distinct from the development key. This certificate must also be imported as a login keychain and not a system keychain and the developer should validate that the certificate is associated with the key in the Keychain Access application. Get a copy of this certificate.

Note: A new 2048-bit Entrust certificate needed for APNS.

Apple uses a 2048-bit root certificate from Entrust, which provides a more secure connection between SAP Mobile Server and APNS. This certificate comes with the Windows OS, and is upgraded automatically with Windows Update, if it is enabled. This information is not part of the procedure that documents APNS support.

If Windows Update is disabled, you must manually download and install the certificate (entrust_2048_ca.cer). Go to https://www.entrust.net/downloads/root_index.cfm. For

help on installing the certificate, see http://www.entrust.net/knowledge-base/technote.cfm?tn=8282.

- Create an enterprise provisioning profile and include the required device IDs with the
 enterprise certificate. The provisioning profile authorizes devices to use applications you
 have signed.
- Create the Xcode project ensuring the bundle identifier corresponds to the bundle identifier in the specified App ID. Ensure you are informed of the "Product Name" used in this project.
- Use the APNS initialization code.

Developers can review complete details in the *iPhone OS Enterprise Deployment Guide* available on the Apple Developers Website.

Task

Each application that supports Apple Push Notifications must be listed in SAP Control Center with its certificate and application name. You must perform this task for each application.

1. Confirm that the IT department has opened ports 2195 and 2196, by executing:

```
telnet gateway.push.apple.com 2195 telnet feedback.push.apple.com 2196
```

If the ports are open, you can connect to the Apple push gateway and receive feedback from it.

- 2. Upload the APNS certificate to SAP Control Center:
 - a) In the navigation pane, click **Applications**.
 - b) In the administration pane, click the **Applications** tab.
 - c) Select the application for which you want to enable APNS, and click **Properties**.
 - d) Click the Push Configurations tab and click on Add.
 - e) Configure all required properties, including the corresponding password and upload the certificate. See *APNS Native Notification Properties* in *SAP Control Center for SAP Mobile Platform* online help.
- **3.** Deploy the iOS application with an enterprise distribution provisioning profile to users' iOS devices.
- **4.** Verify that the APNS-enabled iOS device is set up correctly:
 - a) In SAP Control Center, ensure the user has already activated the application and is connected to the SAP Mobile Server, by looking for the corresponding entry in ApplicationsApplication Connections.
 - b) Validate that in the Application Connection ID, the application name appears correctly at the end of the string.
 - c) Select the user and click **Properties**.
 - d) Check that the *APNS Device Token* contains a value. This indicates that a token has passed successfully following a successful application activation

- **5.** Verify that native notification is enabled for the user:
 - a) Select the user name and click **Properties**.
 - For Application Settings, ensure the Notification Mode property is set to either Only native notifications or Online/payload push with native notification.
 - For Apple Push Notifications, ensure the **Enabled** property is set to **True**.
- **6.** Test the environment by initiating an action that results in a new message being sent to the client.

If you have verified that both device and server can establish a connection to the APNS gateway, the device receives notifications and messages from the SAP Mobile Server. If you configured **Online/ payload push with native notification**, allow a few minutes for the delivery. If the device is offline and the message is pending in messaging queue, SAP Mobile Server triggers the native push notification mechanism to send the Pending Items to the device via APNS. See *Reviewing the Pending Items Count for Messaging Applications* in *System Administration*.

Note: Notifications require a connection to APNS on port 5223. This port is not always routed through the firewall on corporate wireless networks.

7. To troubleshoot APNS, use the SMP_HOME\Servers\SAP Mobile Server \logs\server log file.

Preparing Applications for Deployment to the Enterprise

After you have created your client application, you must sign your application with a certificate from Apple, and deploy it to your enterprise.

Note: Review complete details in the *iPhone OS Enterprise Deployment Guide* available on the Apple Developers Website, and *About Your First App Store Submission* at *https://developer.apple.com/library/ios/#documentation/ToolsLanguages/Conceptual/YourFirstAppStoreSubmission/AboutYourFirstAppStoreSubmission/AboutYourFirstAppStoreSubmission.html#//apple_ref/doc/uid/TP40011375-CH1-SW1.*

- 1. Sign up for the iOS Developer Program, which gives you access to the Developer Connection portal. Registering as an enterprise developer gets you the certificate you need to sign applications.
- 2. Create a certificate request on your Mac through Keychain.
- **3.** Log in to the Developer Connection portal.
- **4.** Upload your certificate request.
- **5.** Download the certificate to your Mac. Use this certificate to sign your application.
- **6.** Create an AppID.

Packaging Applications

Verify that your info.plist file has the correct AppID and application name. Also, in Xcode, right-click **Targets** > <**your_app_target>** and select **Get Info** to verify the AppID and App name.

- **7.** Create an enterprise provisioning profile and include the required device IDs with the enterprise certificate. The provisioning profile authorizes devices to use applications you have signed.
- **8.** Create an Xcode project ensuring the bundle identifier corresponds to the bundle identifier in the specified App ID. Ensure you are informed of the "Product Name" used in this project.

Client Object API Usage

The SAP Mobile Platform Client Object API consists of generated business object classes that represent mobile business objects (MBOs) that are designed and built in the SAP Mobile WorkSpace development environment. Device applications use the Client Object API to retrieve data and invoke mobile business object operations.

Refer to these sections for more information on using the APIs described in *Developer Guide: iOS Object API Applications* > *Developing the Application Using the Object API*.

Client Object API Reference

Use the SAP Mobile Platform Client Object API Headerdocs as a Client Object API reference.

Review the reference details in the Client Object API documentation, located in SMP_HOME \MobileSDK23\ObjectAPI\iOS\headerdoc.

Note: Due to an UltraLite limitation, the first client object API call must be on the main thread in the application.

Application APIs

The SUPApplication class manages mobile application registrations, connections and context.

Note: SAP recommends that you use the Application API operations with no timeout parameter, and register an ApplicationCallback to handle completion of these operations.

Application

Methods or properties in the SUPApplication class.

getInstance

Retrieves the Application instance for the current mobile application.

Syntax

+ (SUPApplication*)getInstance;

Returns

getInstance returns a singleton Application object.

Examples

Get the Application Instance

```
SUPApplication* app = [SUPApplication getInstance];
```

setApplicationIdentifier

Sets the identifier for the current application.

Set the application identifer before calling startConnection or registerApplication.

Syntax

```
+ (void) setApplicationIdentifier: (NSString*) value;
```

Parameters

• value – The identifier for the current application.

Examples

• **Set the Application Identifier** – **Sets** the application identifier to SMP101.

Note: The application identifier is case-sensitive.

```
SUPApplication* app = [SUPApplication getInstance];
@try {
    [app setApplicationIdentifier: @"SMP101"]; ( same as in SCC )
    ...
}
@catch (SUPPersistenceException * pe) {
    NSLog(@"%@: %@", [pe name], [pe message]);
}
```

registrationStatus

Retrieves the current status of the mobile application registration.

Syntax

```
+ (SUPInt) registrationStatus;
```

Returns

registrationStatus returns one of the values defined in the RegistrationStatus class.

```
//The registration bas been successfully created.
#define SUPRegistrationStatus_REGISTERED 203

//The registration is currently being created.
#define SUPRegistrationStatus_REGISTERING 202
```

```
//The registration could not be created or deleted. Using
onRegistrationStatusChanged you can
//capture the associated errorCode and errorMessage. This is a
permanent condition that will
//not be automatically resolved,
//so registerApplication or unregisterApplication must be! called
again to retry.
#define SUPRegistrationStatus_REGISTRATION_ERROR 201

//The registration has been successfully deleted, or there was no
previous registration.
#define SUPRegistrationStatus_UNREGISTERED 205

//The registration is currently being deleted.
#define SUPRegistrationStatus UNREGISTERING 204
```

registerApplication

Creates the registration for this application and starts the connection. This method is equivalent to calling registerApplication: 0.

If an application identifier has not already been set, a SUPPersistanceException is thrown. If connection properties are not available, a

SUPConnectionPropertyException is thrown. If you use this method, do not call startConnection.

Syntax

- (void) registerApplication;

Parameters

None.

Examples

• **Register an Application** – Start registering the application and return at once.

```
[app registerApplication];
```

Usage

You must set up the ConnectionProperties and ApplicationIdentifier before you can invoke registerApplication.

The maximum length of the Application ID is 64 characters. The total length of the Application Connection ID cannot exceeds 128 characters. The Application Connection ID format is deviceId_applicationId. The applicationId separator is two underscores.

```
SUPApplication* app = [SUPApplication getInstance];
[app setApplicationIdentifier:@"SMP101"];
```

```
MyApplicationCallbackHandler *ch = [MyApplicationCallbackHandler
getInstance];
[app setApplicationCallback:ch];
SUPConnectionProperties* props = app.connectionProperties;
[props setServerName:@"server.mycompany.com"];
[props setPortNumber:5001];

SUPLoginCredentials* login = [SUPLoginCredentials getInstance];
login.username = @"supAdmin";
login.password = @"supPwd";
props.loginCredentials = login;
[app registerApplication]; // method returns immediately
```

registerApplication:timeout

Creates the registration for this application and starts the connection. An ApplicationTimeoutException is thrown if the method does not succeed within the number of seconds specified by the timeout.

If an application identifier has not already been set, a SUPPersistanceException is thrown. If connection properties are not available, a

SUPConnectionPropertyException is thrown. If the timeout is greater than 0 and the registration takes longer than the timeout, then a

SUPApplicationTimeoutException is thrown, even though the process will continue in the background. If you use this method, do not call startConnection.

If a callback handler is registered and network connectivity is available, the sequence of callbacks as a result of calling registerApplication is:

```
onRegistrationStatusChanged(RegistrationStatus.REGISTERING, 0, "") onConnectionStatusChanged(ConnectionStatus.CONNECTING, 0, "") onConnectionStatusChanged(ConnectionStatus.CONNECTED, 0, "") onRegistrationStatusChanged(RegistrationStatus.REGISTERED, 0, "")
```

When the connectionStatus of CONNECTED has been reached and the application's applicationSettings have been received from the server, the application is now in a suitable state for database subscriptions and/or synchronization. If a callback handler is registered and network connectivity is unavailable, the sequence of callbacks as a result of calling registerApplication is:

```
onRegistrationStatusChanged(RegistrationStatus.REGISTERING, 0, "") onRegistrationStatusChanged(RegistrationStatus.REGISTRATION_ERROR, code, message)
```

In such a case, the registration process has permanently failed and will not continue in the background. If a callback handler is registered and network connectivity is available for the start of registration but becomes unavailable before the connection is established, the sequence of callbacks as a result of calling registerApplication is:

```
onRegistrationStatusChanged(RegistrationStatus.REGISTERING, 0, "")
onConnectionStatusChanged(ConnectionStatus.CONNECTING, 0, "")
```

```
onConnectionStatusChanged(ConnectionStatus.CONNECTION_ERROR, code,
message)
```

In such a case, the registration process has temporarily failed and will continue in the background when network connectivity is restored.

As a best practice, if a timeout exception occurs in registerApplication or startConnection, the application should wait for the appropriate callback, and optionally add a user message to the application, "please wait" for example, instead of closing the application. This prevents a build up of start up requests by needlessly restarting the application which can adversely affect performance.

Wait for the application callback, such as onConnectionStatusChanged() if ApplicationTimeoutException is encountered when calling registerApplication:timeout, instead of closing the application. This allows the application code to catch ApplicationTimeoutException and does not throw an exception.

Syntax

```
- (void) registerApplication : (SUPInt) timeout;
```

Parameters

• **timeout** – Number of seconds to wait until the registration is created. If the the timeout is greater than zero and the registration is not created within the timeout period, an ApplicationTimeoutException is thrown (the operation might still be completing in a background thread). If the timeout value is less than or equal to 0, then this method returns immediately without waiting for the registration to finish (a non-blocking call). If the timeout value is less than or equal to 0, then this method returns immediately without waiting for the registration to finish (a non-blocking call).

Examples

• **Register an Application** – Registers the application with a one minute waiting period. [app registerApplication:60];

<u>Usage</u>

You must set up the ConnectionProperties and ApplicationIdentifier before you can invoke registerApplication.

The maximum length of the Application ID is 64 characters. The total length of the Application Connection ID cannot exceeds 128 characters. The Application Connection ID format is deviceId_applicationId. The applicationId separator is two underscores.

```
SUPApplication* app = [SUPApplication getInstance];
[app setApplicationIdentifier:@"SMP101"];
```

```
MyApplicationCallbackHandler *ch = [MyApplicationCallbackHandler
getInstance];
[ch retain];
[app setApplicationCallback:ch];

SUPConnectionProperties* props = app.connectionProperties;
[props setServerName:@"server.mycompany.com"];
[props setPortNumber:5001];

SUPLoginCredentials* login = [SUPLoginCredentials getInstance];
login.username = @"supAdmin";
login.password = @"supPwd";
props.loginCredentials = login;

if ([app registrationStatus] != SUPRegistrationStatus_REGISTERED &&
[app registrationStatus] != SUPRegistrationStatus_REGISTERING )
{
[app registerApplication:120]; // 120 second timeout for
registration
}
```

setApplicationCallback

Sets the callback for the current application. It is optional, but recommended, to register a callback so the application can respond to changes in connection status, registration status, and application settings.

Syntax

+ (void) setApplicationCallback: (SUPApplicationCallback*) value;

Parameters

• value – The mobile application callback handler.

Examples

Set the Application Callback

```
SUPApplication* app = [SUPApplication getInstance];
@try {
    [app setApplicationIdentifier: @"appname"]; ( same as in SCC )
    [app setApplicationCallback:self];
    ...
}
@catch (SUPPersistenceException * pe) {
    NSLog(@"%@: %@", [pe name], [pe message]);
}
```

ApplicationCallback Property

Callback for the current application. It is optional (but recommended) to set a callback, so that the application can respond to changes of connection status, registration status and application settings.

Syntax

```
public IApplicationCallback ApplicationCallback { get; set; }
```

Examples

Get the current ApplicationCallback handler

```
application.ApplicationCallback = new MyApplicationCallback();
```

startConnection:timeout

Starts the connection for this application. If the connection was previously started, then this operation has no effect. You must set the appropriate connectionProperties before calling this operation. An ApplicationTimeoutException is thrown if the method does not succeed within the number of seconds specified by the timeout.

If connection properties are improperly set, a <code>ConnectionPropertyException</code> is thrown. You can set the <code>applicationCallback</code> before calling this operation to receive asynchronous notification of connection status changes. If a callback handler is registered and network connectivity is available, the sequence of callbacks as a result of calling <code>startConnection</code> is:

```
onConnectionStatusChanged(ConnectionStatus.CONNECTING, 0, "")
onConnectionStatusChanged(ConnectionStatus.CONNECTED, 0, "")
```

If a callback handler is registered and network connectivity is unavailable, the sequence of callbacks as a result of calling startConnection is:

```
onConnectionStatusChanged(ConnectionStatus.CONNECTING, 0, null)
onConnectionStatusChanged(ConnectionStatus.CONNECTION_ERROR, code,
message)
```

After a connection is successfully established, it can transition at any later time to CONNECTION_ERROR status or NOTIFICATION_WAIT status and subsequently back to CONNECTING and CONNECTED when connectivity resumes.

Note: The application must have already been registered for the connection to be established. See *registerApplication* for details.

Syntax

```
+ (void) startConnection: (int32_t) timeout;
```

Parameters

• **timeout** – The number of seconds to wait until the connection is started. If the timeout is greater than zero and the connection is not started within the timeout period, an ApplicationTimeoutException is thrown (the operation may still be completing in a background thread). If the timeout value is less than or equal to 0, then this method returns immediately without waiting for the registration to finish (a non-blocking call).

Returns

None.

Examples

Start the Application

```
[app startConnection:timeout];
```

connectionStatus

Return current status of the mobile application connection.

Syntax

```
+ (int32 t)connectionStatus;
```

Returns

connectionStatus returns one of the SUPConnectionStatus class values.

```
//The connection been successfully started.
#define SUPConnectionStatus CONNECTED 103
//The connection is currently being started.
#define SUPConnectionStatus CONNECTING 102
//The connection could not be started, or was previously started and
subsequently an error occurred. Using
//onConnectionStatusChanged you can capture the associated errorCode
and errorMessage. This is a temporary condition that
//can be automatically! resolved, if network connectivity can be
established or reestablished.
#define SUPConnectionStatus CONNECTION ERROR 101
//The connection been successfully stopped, or there was no previous
connection.
#define SUPConnectionStatus DISCONNECTED 105
//The connection is currently being stopped.
#define SUPConnectionStatus DISCONNECTING 104
```

ConnectionStatus has the following possible values:

- ConnectionStatus.CONNECTED The connection has been successfully started.
- **ConnectionStatus.CONNECTING** The connection is currently being started.
- ConnectionStatus.CONNECTION_ERROR The connection could not be started, or
 was previously started and subsequently an error occurred. Use
 onConnectionStatusChanged to capture the associated errorCode and
 errorMessage.
- **ConnectionStatus.DISCONNECTED** The connection been successfully stopped, or there was no previous connection.
- ConnectionStatus.DISCONNECTING The connection is currently being stopped.
- ConnectionStatus.NOTIFICATION_WAIT The connection has been suspended and is awaiting a notification from the server. This is a normal situation for those platforms which can keep connections closed when there is no activity, since the server can reawaken the connection as needed with a notification.

Get the Application Connection Status

```
[SUPApplication connectionStatus];
```

getConnectionProperties

Retrieves the connection parameters from the application's connection properties instance. You must set connection properties before calling startConnection, registerApplication or unregisterApplication.

Syntax

+ (SUPConnectionProperties*) connectionProperties;

Parameters

None.

Returns

Returns the connection properties instance.

ApplicationSettings Property

Return application settings that have been received from the SAP Mobile Server after application registration and connection.

Syntax

Sybase.Mobile.ApplicationSettings ApplicationSettings { get; set; }

Returns

Application settings that have been received from the SAP Mobile Server.

Examples

• Get the Application Settings

```
ApplicationSettings applicationSettings = Application.GetInstance().ApplicationSettings
```

beginDownloadCustomizationBundle:(NSStream*)outputStream

Starts downloading the default resource bundle associated with the application, and saves it into the output stream that you provide.

The resource bundle is saved into the output stream that you provide. An application can only have one default resource bundle.

Syntax

```
- (void) beginDownloadCustomizationBundle : (NSStream*) outputStream;
```

Parameters

• **outputStream** – An output stream that you provide.

Returns

None.

Examples

Download

```
// Download the default bundle file and save it to the
defaultBundle.jar file
SUPApplication* app = [SUPApplication getInstance];
NSOutputStream* ostream = [self
openOutputStream:@"defaultBundle.jar"];
[app beginDownloadCustomizationBundle:ostream];
```

<u>beginDownloadCustomizationBundle:(NSString*)customizationBundleID</u> withOutputStream:(NSOutputStream*)outputStream

Start downloading the resource bundle named customizationBundleID and save it to an output stream.

The resource bundle is saved into the output stream that you provide.

Syntax

```
-(void) beginDownloadCustomizationBundle:
(NSString*)customizationBundleID withOutputStream:
(NSOutputStream*)outputStream;
```

Parameters

- **customizationBundleID** The resource bundle name.
- **outputStream** An output stream of bytes that you provide.

Returns

None.

Examples

Download

```
// Download a specific ("Example") resource bundle and save to
Example.jar
SUPApplication* app = [SUPApplication getInstance];
NSOutputStream* ostream = [self openOutputStream: @"
Example.jar"];
app beginDownloadCustomizationBundle:@"Example:2.0"
withOutputStream:ostream];
```

stopConnection:timeout

Stop the connection for this application. An ApplicationTimeoutException is thrown if the method does not succeed within the number of seconds specified by the timeout.

If no connection was previously stopped, then this operation has no effect. You can set the applicationCallback before calling this operation to receive asynchronous notification of connection status changes.

If a callback handler is registered, the sequence of callbacks as a result of calling stopConnection is:

- onConnectionStatusChanged(ConnectionStatus.DISCONNECTING, 0, "")
- onConnectionStatusChanged(ConnectionStatus.DISCONNECTED, 0, "")

Syntax

```
+ (void) stopConnection: (int32_t) timeout
```

Parameters

• **timeout** – The number of seconds to wait until the connection is stopped. If the timeout value is less than or equal to 0, then this method returns immediately without waiting for the registration to finish (a non-blocking call).

Returns

None

Examples

Stop the Application

```
[SUPApplication stopConnection:<timeout>];
```

unregisterApplication

Delete the registration for this application, and stop the connection. If no registration was previously created, or a previous registration was already deleted, then this operation has no effect. This method is equivalent to calling unregisterApplication: 0, but is a non-blocking call which returns immediately. You can set the applicationCallback before calling this operation to receive asynchronous notification of registration status changes.

Make sure the synchronization process has ended before calling this method.

Syntax

- (void) unregister Application;

Parameters

None

Examples

• Unregister an Application – Unregisters the application.

```
[app unregisterApplication];
```

unregisterApplication:timeout

Delete the registration for this application, and stop the connection. If no registration was previously created, or a previous registration was already deleted, then this operation has no effect. You can set the applicationCallback before calling this operation to receive asynchronous notification of registration status changes.

If a callback handler is registered and network connectivity is available, the sequence of callbacks as a result of calling unregisterApplication should be:

- onConnectionStatusChanged(ConnectionStatus.DISCONNECTING, 0, "")
- onConnectionStatusChanged(ConnectionStatus.DISCONNECTED, 0, "")
- onRegistrationStatusChanged(RegistrationStatus.UNREGISTERING, 0, "")
- onRegistrationStatusChanged(RegistrationStatus.UNREGISTERED, 0, "")

If a callback handler is registered and network connectivity is unavailable, the sequence of callbacks as a result of calling unregisterApplication should be:

- onConnectionStatusChanged(ConnectionStatus.DISCONNECTING, 0, "")
- onConnectionStatusChanged(ConnectionStatus.DISCONNECTED, 0, "")
- onRegistrationStatusChanged(RegistrationStatus.UNREGISTERING, 0, "")
- onRegistrationStatusChanged(RegistrationStatus.REGISTRATION_ERROR, code, message)

Syntax

+ (void)unregisterApplication: (int32 t)timeout;

Parameters

• **timeout** – Number of seconds to wait until the application is unregistered. If the timeout value is less than or equal to 0, then this method returns immediately without waiting for the registration to finish (a non-blocking call).

Examples

• Unregister an Application – Unregisters the application with a one minute waiting period.

[app unregisterApplication:60];

ConnectionProperties

A class that supports the configuration of properties to enable application registrations and connections.

activationCode

Retrieves or sets the activation code. If you register an application manually, you must set an activation code.

Syntax

@property(readwrite, retain, nonatomic) NSString* activationCode;

Parameters

None.

Returns

Returns the activation code.

networkProtocol

Retrieves or sets the network protocol for the server connection URL, which is also known as the URL scheme. Defaults to HTTP.

Syntax 1 4 1

@property(readwrite, retain, nonatomic) NSString* networkProtocol;

Parameters

None.

Returns

Returns the network protocol for the server connection URL.

loginCertificate

Retrieve the login certificate, or set this property to enable authentication by a digital certificate.

Syntax

@property(readwrite, retain, nonatomic) SUPLoginCertificate
*loginCertificate;

Parameters

None

Returns

Returns the login certificate.

loginCredentials

Retrieve the login credentials, or set this property to enable authentication by username and password..

Syntax

```
@property(readwrite, copy, nonatomic) SUPLoginCredentials
*loginCredentials;
```

Parameters

None.

Returns

Returns the login credentials.

portNumber

Retrieve or set the port number for the server connection URL.

Syntax

@property(readwrite) int32 t portNumber;

Parameters

None.

Returns

Returns the port number.

serverName

Retrieve or set the server name for the server connection URL.

Syntax

@property(readwrite, retain, nonatomic) NSString* serverName;

Parameters

None.

Returns

Returns the server name.

securityConfiguration

Retrieve the security configuration for the connection profile. If not specified, the server selects the correct security configuration by matching an application connection template with the applicationIdentifier. If you have two application connection templates with the same application ID but different security configurations, you must set the security configuration. Otherwise, a 'template not found' exception will be thrown.

Syntax

@property(readwrite, retain, nonatomic) NSString*
securityConfiguration;

Parameters

None.

Returns

Returns the security configuration.

urlSuffix

Retrieve the URL suffix for the server connection URL. This optional property is only used when connecting through a proxy server or Relay Server.

If the URL Suffix is left blank, then the client will attempt to discover the correct URL using default Relay Server URLs. If a valid urlSuffix is discovered, the value will be saved and used exclusively.

Note: If an incorrect URL is configured, it must be cleared or corrected before the client is able to connect.

Syntax

@property(readwrite, retain, nonatomic) NSString* urlSuffix;

Parameters

None.

Returns

Returns the URL suffix.

Usage

The suffix "/%cid%/tm" is appended if the URL does not already end in "/tm". If the URL ends in "/", then only "%cid%/tm" is appended.

You can optionally code a Content-ID (CID) into the URL.

For example, if the CID is "XYZ" then any of these URL suffixes:

- /ias_relay_server/client/rs_client.dll
- /ias_relay_server/client/rs_client.dll/
- /ias_relay_server/client/rs_client.dll/%cid%/tm
- /ias_relay_server/client/rs_client.dll/XYZ/tm

result in the following URL suffix:

• /ias_relay_server/client/rs_client.dll/XYX/tm

farmld

Retrieve the Farm ID for the server connection URL. This optional property is used in the URL discovery process when connecting through a proxy server or Relay Server. The farmId is substituted into the default URL templates for Relay Server on into a configured urlSuffix. The farmId is used only until a connection is successfully made and the permanent urlSuffix is stored.

Syntax

@property(readwrite, retain, nonatomic) NSString* farmId;

Parameters

None.

Returns

Returns the Farm ID.

httpHeaders

Retrieve or set any custom headers for HTTP network communications with a proxy server or Relay Server.

Syntax

@property(readwrite, retain, nonatomic) SUPStringProperties*
httpHeaders;

Parameters

None.

Returns

Returns the HTTP headers.

httpCookies

Retrieve or set any custom HTTP cookies for network communications with a proxy server or Relay Server.

Syntax

@property(readwrite, retain, nonatomic) SUPStringProperties* httpCookies;

Parameters

None.

Returns

Returns the HTTP cookies.

httpCredentials

Retrieve or set the credentials for HTTP basic authentication with a proxy server or Relay Server.

Syntax

@property(readwrite, retain, nonatomic) SUPLoginCredentials
*httpCredentials;

Parameters

None.

Returns

Returns credentials for HTTP basic authentication with a proxy server or Relay Server.

ApplicationSettings

Methods or properties in the SUPApplicationSettings class.

isApplicationSettingsAvailable

Checks whether the application settings are available from the SAP Mobile Server.

Syntax

- (BOOL) isApplicationSettingsAvailable;

Parameters

None.

Returns

Returns true if the application settings are available.

Examples

· Check if application settings are available

```
BOOL isSettingsAvailable = [[SUPApplication
getInstance].applicationSettings isApplicationSettingsAvailable];
```

getStringProperty

Retrieves a string property from the applicationSettings.

Syntax

+ (NSString*)getStringProperty:(SUPConnectionPropertyType)propId;

Parameters

- Type of ConnectionPropertyType.
- **propId** The property ID of the SUPConnectionPropertyType.

Returns

Returns a string property value.

Examples

Get string property

```
NSString *username = [[SUPApplication
getInstance].applicationSettings
getStringProperty:USERNAME PROP ID];
```

getIntegerProperty

Retrieves an integer property from the applicationSettings.

Syntax

```
+ (int) getIntProperty: (SUPConnectionPropertyType)propId;
```

Parameters

- Type of ConnectionPropertyType.
- **propId** The property ID of the SUPConnectionPropertyType.

Returns

Returns an integer property value.

Examples

• Get integer property

```
int min_length = [[SUPApplication
getInstance].applicationSettings
getIntegerProperty:PWDPOLICY MIN LENGTH PROP ID];
```

getBooleanProperty

Retrieves a boolean property from the application Settings.

Syntax

+ (BOOL) getBooleanProperty: (SUPConnectionPropertyType)propId;

Parameters

- Type of ConnectionPropertyType.
- **propId** The property ID of the SUPConnectionPropertyType.

Returns

Returns a boolean property value.

Get boolean property

```
BOOL pwdpolicy_has_lower = [[SUPApplication
getInstance].applicationSettings getBooleanProperty:
PWDPOLICY_HAS_LOWER_PROP_ID];
```

custom1

A custom application setting for use by the application code.

Syntax

- (NSString*) custom1

Parameters

None.

Returns

Returns a custom application setting.

Examples

· Custom application setting

```
SUPApplicationSettings* applicationSettings = [[SUPApplication
getInstance] applicationSettings];
NSString* custom1 = [applicationSettings custom1];
```

custom2

A custom application setting for use by the application code.

Syntax

- (NSString*) custom2

Parameters

None.

Returns

Returns a custom application setting.

Custom application setting

```
SUPApplicationSettings* applicationSettings = [[SUPApplication
getInstance] applicationSettings];
NSString* custom2 = [applicationSettings custom2];
```

custom3

A custom application setting for use by the application code.

Syntax

- (NSString*) custom3

Parameters

None.

Returns

Returns a custom application setting.

Examples

· Custom application setting

```
SUPApplicationSettings* applicationSettings = [[SUPApplication
getInstance] applicationSettings];
NSString* custom3 = [applicationSettings custom3];
```

custom4

A custom application setting for use by the application code.

Syntax

- (NSString*) custom4

Parameters

None.

Returns

Returns a custom application setting.

Custom application setting

```
SUPApplicationSettings* applicationSettings = [[SUPApplication
getInstance] applicationSettings];
NSString* custom4 = [applicationSettings custom4];
```

domainName

Syntax

- (NSString*)domainName

Parameters

None.

Returns

Returns the domain name.

Examples

Domain name

```
SUPApplicationSettings* applicationSettings = [[SUPApplication
getInstance] applicationSettings];
NSString* domainName = [applicationSettings domainName];
```

connectionId

Syntax

- (NSString*) connectionId

Parameters

None.

Returns

Returns a Connection ID for this application setting.

Examples

Connection ID

```
SUPApplicationSettings* applicationSettings = [[SUPApplication
getInstance] applicationSettings];
NSString* connectionId= [applicationSettings connectionId];
```

ConnectionPropertyType

Methods or properties in the SUPConnectionPropertyType class.

See the generated API reference provided with the Mobile SDK for a complete list of methods in the SUPConnectionPropertyType class.

PwdPolicy_Enabled

Indicates whether the password policy is enabled.

Syntax

ConnectionPropertyType PwdPolicy Enabled

Parameters

None.

Returns

Examples

PwdPolicy Enabled

```
BOOL pwdpolicy_enabled = [[SUPApplication
getInstance].applicationSettings
getBooleanProperty:PWDPOLICY ENABLED PROP ID];
```

PwdPolicy_Default_Password_Allowed

Indicates whether the client application is allowed to use the default password for the data vault.

Syntax

ConnectionPropertyType PwdPolicy Default Password Allowed

Parameters

None.

Returns

None.

PwdPolicy_Default_Password_Allowed

```
BOOL pwdpolicy_default_pwd_allowed = [[SUPApplication getInstance].applicationSettings getBooleanProperty:PWDPOLICY DEFAULT PASSWORD ALLOWED PROP ID];
```

PwdPolicy Length

Defines the minimum length for a password.

Syntax

ConnectionPropertyType PwdPolicy Length

Parameters

None.

Returns

Returns an integer value for the minimum length for a password.

Examples

· PwdPolicy_Length

```
int min_length = [[SUPApplication
getInstance].applicationSettings
getIntegerProperty:PWDPOLICY MIN LENGTH PROP ID];
```

PwdPolicy_Has_Digits

Indicates if the password must contain digits.

Syntax

ConnectionPropertyType PwdPolicy Has Digits

Parameters

None.

Returns

Returns true if the password must contain digits.

• PwdPolicy_Has_Digits

```
BOOL pwdpolicy_has_digits = [[SUPApplication
getInstance].applicationSettings getBooleanProperty:
PWDPOLICY_HAS_DIGITS_PROP_ID];
```

PwdPolicy Has Upper

Indicates if the password must contain at least one upper case character.

Syntax

ConnectionPropertyType PwdPolicy Has Upper

Parameters

None.

Returns

Returns true if the password must contain at least one upper case character.

Examples

PwdPolicy_Has_Upper

```
BOOL pwdpolicy_has_upper = [[SUPApplication getInstance].applicationSettings getBooleanProperty:
PWDPOLICY HAS UPPER PROP ID];
```

PwdPolicy_Has_Lower

Indicates if the password must contain at least one lower case character.

Syntax

ConnectionPropertyType PwdPolicy Has Lower

Parameters

None.

Returns

Returns true if the password contains at least one lower case character.

PwdPolicy_Has_Lower

```
BOOL pwdpolicy_has_lower = [[SUPApplication
getInstance].applicationSettings getBooleanProperty:
PWDPOLICY_HAS_LOWER_PROP_ID];
```

PwdPolicy Has Special

Indicates if the password must contain at least one special character. A special character is a character in the set "~!@#\$%^&*()-+".

Syntax

```
ConnectionPropertyType PwdPolicy_Has_Special
```

Parameters

None.

Returns

Returns true if the password must contain at least one special character.

Examples

· PwdPolicy_Has_Special

```
BOOL pwdpolicy_has_special = [[SUPApplication
getInstance].applicationSettings getBooleanProperty:
PWDPOLICY HAS SPECIAL PROP ID];
```

PwdPolicy Expires In N Days

Specifies the number of days in which the password expires from the date of setting the password.

Syntax

```
ConnectionPropertyType PwdPolicy Expires In N Days
```

Parameters

None.

Returns

Returns an integer value for the number of days in which the password expires.

• PwdPolicy_Expires_In_N_Days

```
int expires_in_n_days = [[SUPApplication
getInstance].applicationSettings
getIntegerProperty:PWDPOLICY_EXPIRES_IN_N_DAYS_PROP_ID];
```

PwdPolicy Min Unique Chars

Specifies the minimum number of unique characters in the password.

Syntax

ConnectionPropertyType PwdPolicy Min Unique Chars

Parameters

None.

Returns

An integer specifying the minimum number of unique characters in the password.

Examples

• PwdPolicy_Min_Unique_Characters

```
int min_unique_characters = [[SUPApplication
getInstance].applicationSettings
getIntegerProperty:PWDPOLICY MIN UNIQUE CHARS PROP ID];
```

PwdPolicy_Lock_Timeout

Specifies the timeout value (in seconds) after which the vault is locked from the unlock time. A value of 0 indicates no timeout.

Syntax

ConnectionPropertyType PwdPolicy Lock Timeout

Parameters

None.

Returns

An integer specifying the timeout value.

PwdPolicy_Lock_Timeout

```
int lock_timeout = [[SUPApplication
getInstance].applicationSettings
getIntegerProperty:PWDPOLICY_LOCK_TIMEOUT_PROP_ID];
```

PwdPolicy_Retry_Limit

Specifies the number of failed unlock attempts after which the data vault is deleted. A value of 0 indicates no retry limit.

Syntax

ConnectionPropertyType PwdPolicy Retry Limit

Parameters

None.

Returns

An integer specifying the number of failed unlock attempts after which the data vault is deleted.

Examples

• PwdPolicy_Retry_Limit

```
int pwdpolicy_retry_limit = [[SUPApplication
getInstance].applicationSettings
getIntegerProperty:PWDPOLICY RETRY LIMIT PROP ID];
```

Afaria APIs

Use the Afaria APIs to provision your SAP Mobile Platform application with configuration data for connecting to the SAP Mobile Server, and certificates.


Using Afaria to Provision Configuration Data

You can use Afaria to provision configuration data for a SAP Mobile Platform application, including the SAP Mobile Server server name, port number, and other parameters.

To use these APIs you must provide the application to the device through an Afaria application policy. When setting up such an application policy, the Afaria administration interface provides an option to add configuration data to the policy as text or binary.

The following is an an example of the Afaria administration screen for an application policy that provides an application named "CertsOnBoard" to an enrolled device. The "Configuration" tab shows the configuration data provided to the application.

In this case, the configuration information is added using the administration user interface, but it can also be provided as a text or binary file. The example shows plain text, but you can also provide the information as XML or JSON text for easier parsing by the application.

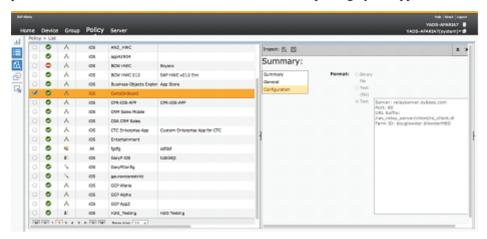

You can obtain configuration data for your application using Afaria by calling the following API from the <code>SeedingAPISynchronous</code> class (in Afaria's

SeedingAPISynchronous.h header file:

```
+ (NSInteger)retrieveSeedData:(NSString *)urlScheme InFile:
(NSMutableString *)seedFile withCredentials:(NSURLCredential
*)credentials;
```

Or, call this asynchronous API from the SeedDataAPI class (in SeedDataAPI.h):

```
(void) retrieveSeedData;
```

To access this data, the application provides an NSMutableString to the retrieveSeedData API. If the device is correctly enrolled to Afaria, the API returns kSeedDataAvailable and the NSMutableString contains the full path to a file in the application's sandbox with the seed data.

This example code retrieves the configuration data using the Afaria API, parses it using the native iOS APIs, and applies the appropriate settings using the SAP Mobile Platform APIs (the SUPApplication and SUPConnectionProperties classes).

```
NSMutableString *seedFile = [NSMutableString string];
retCode = [SeedingAPISynchronous retrieveSeedData:@"certsonboard-
seed" InFile:seedFile withCredentials:nil];
NSError *error = nil;
switch(retCode)
{
   case kSeedDataAvailable: // Seed data is available, read the file
        NSLog(@"Seed file = %@",seedFile);
        NSLog(@"Seed data = %@",[NSString
stringWithContentsOfFile:seedFile encoding:NSUTF8StringEncoding
error:&error]);
```

```
break:
  case kSeedDataUnavailable:
   NSLog(@"kSeedDataUnavailable"); // Error
   break:
  case kAfariaClientNotInstalled:
   NSLog(@"kAfariaClientNotInstalled"); // Error
  case kAfariaSettingsRequested:
   NSLog(@"kAfariaSettingsReguested"); // Error
// Read the text from the Afaria configuration file
NSString *configurationText = [NSString
stringWithContentsOfFile:seedFile encoding:NSUTF8StringEncoding
error: & errorl;
// Separate the text into lines
NSArray *configurationLines = [configurationText
componentsSeparatedByString:@"\n"];
// Create a dictionary, and go through the lines to find name value
pairs
NSMutableDictionary *settings = [NSMutableDictionary dictionary];
for(NSString *s in configurationLines)
 NSArray *nvpair = [s componentsSeparatedByString:@": "];
  if([nvpair count] == 2)
    [settings setValue:[nvpair objectAtIndex:1] forKey:[nvpair
objectAtIndex:0]];
// Use the name value pairs from the configuration file to set the
appropriate settings in the SUPApplication API
SUPApplication *app = [SUPApplication getInstance];
app.applicationIdentifier = @"myAppID";
SUPConnectionProperties *properties = app.connectionProperties;
properties.serverName = [settings valueForKey:@"Server"];
properties.portNumber = [[settings valueForKey:@"Port"] intValue];
properties.farmId = [settings valueForKey:@"Farm ID"];
properties.urlSuffix = [settings valueForKey:@"URL Suffix"];
NSLog(@"Server name is set to %@",properties.serverName);
NSLog(@"Port number is set to %d", properties.portNumber);
NSLog(@"Farm ID is set to %@", properties.farmId);
NSLog(@"URL suffix is set to %@", properties.urlSuffix);
```

Example output on the Xcode console:

```
Port: 80
URL Suffix: /ias_relay_server/client/rs_client.dl
Farm ID: example.exampleMBS
```

For more information on the Afaria APIs and the meanings of return codes, see the Afaria documentation.

Using Certificates from Afaria for Authentication

One of the features of Afaria is the ability to provide a device with a signed certificate that could be used as an authentication credential for SAP Mobile Platform. This note explains how to take a certificate provided by Afaria and convert it into a form suitable for use with SAP Mobile Platform.

Prerequisites:

- The iOS application has been built using the SAP Mobile Platform generated code and framework headers and libraries.
- The iOS application includes the required Afaria headers SeedDataAPI.h and SeedingAPISynchronous.h.
- The iOS application has been registered with the Afaria server as an application policy and made available to the iOS client device.

In SAP Mobile Platform, a certificate can be used for authentication by creating a LoginCertificate object (the SUPLoginCertificate class), and setting that as the certificate property in the client's synchronization profile. The login certificate has two properties that are used in authentication; the subjectCN (the common name of the certificate) and the signedCertificate (the certificate data itself).

After calling the Afaria APIs to get initial settings and configuration data, an application using Afaria may obtain a signed certificate using one of these APIs:

```
+ (NSInteger)retrieveCertificateWithPrivateKey:
(SecKeyRef)privateKey andPublicKey: (SecKeyRef)publicKey
andCommonName: (NSString *) commonName andChallenge: (NSString
*) challengeCode forUrlScheme: (NSString *) urlScheme inCertificate:
(SecCertificateRef *) certificate;

+ (NSInteger)retrieveCertificateWithUrl: (NSURL *) url andPrivateKey:
(SecKeyRef)privateKey andPublicKey: (SecKeyRef)publicKey
andCommonName: (NSString *) commonName andChallenge: (NSString
*) challengeCode inCertificate: (SecCertificateRef *) certificate;
```

After this, the application will have a SecCertificateRef with the certificate, and a SecKeyRef with the private key. The certificate data in the SecCertificateRef cannot be used as is in the signedCertificate property of an SUPLoginCertificate. The signedCertificate property value is expected to contain the certificate and a digest of the certificate in ASN.1 format. To create the signedCertificate property value:

This sample code shows how to get the Afaria certificate, create an SUPLoginCertificate object, and attach it to a SAP Mobile Platform synchronization profile.

```
// At this point, an Afaria user should have a signed certificate and
a private key available after importing
// their certificate using either of the Afaria APIs
+ (NSInteger) retrieveCertificateWithPrivateKev:
(SecKeyRef) privateKey and PublicKey: (SecKeyRef) publicKey
andCommonName: (NSString *) commonName andChallenge: (NSString
*) challengeCode forUrlScheme: (NSString *) urlScheme inCertificate:
(SecCertificateRef *)certificate;
+ (NSInteger) retrieveCertificateWithUrl: (NSURL *) url andPrivateKey:
(SecKeyRef) privateKey and PublicKey: (SecKeyRef) publicKey
andCommonName: (NSString *) commonName andChallenge: (NSString
*) challengeCode inCertificate: (SecCertificateRef *) certificate;
SecCertificateRef certificate;
SecKeyRef privatekey;
* /
SUPLoginCertificate *loginCertificate = [SUPLoginCertificate
getInstancel;
loginCertificate.subjectCN =
(NSString*) SecCertificateCopySubjectSummary(certificate);
loginCertificate.signedCertificate = [CertBlobUtility
makeCertBlob:certificate andPrivateKey:privatekey];
NSLog(@"Certificate created. Subject =
%@",loginCertificate.subjectCN);
NSLog(@"MD5 digest = %@",[CertBlobUtility
md5sum:loginCertificate.signedCertificate]);
NSLog(@"SHA1 digest = %@", [CertBlobUtility
shal:loginCertificate.signedCertificate]);
// Attach certificate to sync profile
SUPConnectionProfile *syncProfile = [SAPSSOCertTestSAPSSOCertTestDB
getSynchronizationProfile];
syncProfile.certificate = loginCertificate;
[loginCertificate release];
```

CertBlobUtility Header

The CertBlob Utility header of the CertBlob class.

```
#import <Foundation/Foundation.h>
#import <Security/Security.h>

@interface CertBlobUtility : NSObject

// Returns the MD5 sum of the input data
+ (NSString*)md5sum:(NSData*)certData;

// Returns the SHA1 fingerprint of the input data
+ (NSString*)sha1:(NSData*)certData;

// Given a signed certificate and private key, return a certificate blob suitable for use in an SUPLoginCertificate
+ (NSData *)makeCertBlob:(SecCertificateRef)certificate andPrivateKey:(SecKeyRef)privateKey;
@end
```

CertBlobUtility Source

The CertBlob Utility source of the CertBlob class.

```
#import "CertBlobUtility.h"
#import <CommonCrypto/CommonDigest.h>
bool getAsn1LengthBytes(
  int iLengthVal, // (IN) value to be encoded
  unsigned char* pbOut, // (IN/OUT) buffer to be populated with
the encoding or NULL to get sizing information
 int *iOutLen // (IN/OUT) if pbOut != NULL, size of pbOut buffer
in allocated bytes. Is set to the number
  // of bytes required/written in the encoding on return.
);
bool makeCertBlob(
 unsigned char* pbCert, // Certificate to be encoded in the CertBlob int iCertLen, // Length in bytes of pbCert
 unsigned char* pbSiq, // Signature to be encoded in the CertBlob
 int iSiqLen, // Length in bytes of pbSig
 unsigned char byteAlgorithm, // Algorithm constant to be encoded in
the CertBlob
  unsigned char* pbOut, // (IN/OUT) buffer to be populated with the
encoding or NULL to get sizing information
 int *iOutLen // (IN/OUT) if pbOut != NULL, size of pbOut buffer in
allocated bytes. Is set to the number
 // of bytes required/written in the encoding on return.
);
bool getAsn1LengthBytes(
 int iLengthVal, // (IN) value to be encoded
unsigned char* pbOut, // (IN/OUT) buffer to be populated with
```

```
the encoding or NULL to get sizing information
 int *iOutLen // (IN/OUT) if pbOut != NULL, size of pbOut buffer
in allocated bytes. Is set to the number
  // of bytes required/written in the encoding on return.
  // simple short form length
 if ( iLengthVal < 0x80 )
   if ( ( pbOut != NULL ) && ( *iOutLen < 1 ) )
     return false;
   *iOutLen = 1;
    if ( pbOut != NULL )
      *pbOut = (unsigned char) iLengthVal;
   return true;
  }
 // if we got here, we need long form, because the short form doesn't
fit in a single byte
  // count the number of bytes in iVal
 int iTmp = iLengthVal;
  int iCount = 0;
 iTmp = iLengthVal;
 unsigned char byteLast = 0;
 while ( iTmp != 0 )
   iCount++;
   byteLast = (unsigned char) ( iTmp & 0xFF );
   iTmp >>= 8;
  // case where caller wants to know how to size buffer
  if ( NULL == pbOut )
    *iOutLen = iCount + 1; // +1 for the length byte
     return true;
  if ( *iOutLen < iCount + 1 )
   return false;
  *iOutLen = iCount + 1; // +1 for the length byte
  // Create an array with the count of bytes, followed by the iVal
bytes
 // Setting the top bit of the count indicates that this is a count
with the value to follow, not the actual integer value
 pbOut[ 0 ] = (unsigned char) ( iCount | 0x80 ); // count
 iTmp = iLengthVal;
  while ( iTmp != 0 )
   unsigned char b = (unsigned char) ( iTmp & 0xFF );
   iTmp >>= 8;
  pbOut[ iCount-- ] = b;
```

```
return true;
// makeCertBlob "C" function used by SSOCertManager makeCertBlob
method below
* Returns a buffer containing an ASN.1 encoding for a CertBlob.
 * Upon return, pbOut will be filled with the result and
 * iOutLen will contain the number of bytes written. If this
 * function is called with NULL as the pbOut pointer, it will
 * populate iOutLen without writing anything. The expected usage
 * is to call with pbOut==NULL to size the buffer, allocate the
buffer,
 * then call it again with the newly allocated buffer.
 * Return value of false is if pbOut!=NULL and the passed in iOutLen
 * is less than the required number of bytes to write the result.
*/
bool makeCertBlob(
 unsigned char* pbCert, // Certificate to be encoded in the CertBlob
 int iCertLen, // Length in bytes of pbCert
 unsigned char* pbSiq, // Signature to be encoded in the CertBlob
 int iSiqLen, // Length in bytes of pbSiq
 unsigned char byteAlgorithm, // Algorithm constant to be encoded in
the CertBlob
  unsigned char* pbOut, // (IN/OUT) buffer to be populated with the
encoding or NULL to get sizing information
 int *iOutLen // (IN/OUT) if pbOut != NULL, size of pbOut buffer in
allocated bytes. Is set to the number
  // of bytes required/written in the encoding on return.
  int iCertLenLen, iSigLenLen;
  int iAlgorithmLen = 2;
  // get number of bytes in length descriptors
  if ( !qetAsn1LengthBytes( iCertLen, NULL, &iCertLenLen ) )
   return false;
  if ( !getAsn1LengthBytes( iSigLen, NULL, &iSigLenLen ) )
   return false;
  // calculate size of content of sequence
  int iSeqLen = 1 + // type code for OCTET STRING
 iCertLenLen + // length bytes for Certificate
               // data bytes for Certificate
  iCertLen +
                 // type code for OCTET STRING
  1 +
  iSigLenLen + // length bytes for Signature
 iSigLen +
                 // data bytes for Signature
                 // type code for INTEGER
  1 +
  iAlgorithmLen; // data bytes for algorithm (assumed to be an
integer that fits in a single byte)
```

```
// now calculate size of outer sequence
 int iSeqLenLen;
 if (!qetAsn1LengthBytes(iSeqLen, NULL, &iSeqLenLen))
   return false;
 int iTotalLen = 1 +
                               // type code for SEQUENCE
 iSeqLenLen + // length bytes for Sequence
 iSeqLen; // data bytes for Sequence
 if ( NULL == pbOut )
   // caller is just asking for required buffer size
   *iOutLen = iTotalLen;
     return true;
 // test whether buffer is large enough
 if ( *iOutLen < iTotalLen )</pre>
   return false;
 // write everything to the buffer
 int iCurIdx = 0;
 // header bytes for wrapping sequence
 pbOut[ iCurIdx++ ] = (unsigned char) 0x30; // type code for
SEQUENCE
 if (!getAsn1LengthBytes(iSeqLen, pbOut + iCurIdx,
&iSeqLenLen ) ) // length bytes for Sequence
   return false;
 iCurIdx += iSeqLenLen;
 // first element of sequence -> certificate
 pbOut[ iCurIdx++ ] = (unsigned char) 0x04; // type code for OCTET
 if (!getAsn1LengthBytes(iCertLen, pbOut + iCurIdx,
&iCertLenLen ) ) // length bytes for Certificate
   return false;
 iCurIdx += iCertLenLen;
 memcpy( pbOut + iCurIdx, pbCert, iCertLen ); // bytes for
Certificate
 iCurIdx += iCertLen;
 // second element of sequence -> signature
 pbOut[ iCurIdx++ ] = (unsigned char) 0x04; // type code for OCTET
STRING
 if (!getAsn1LengthBytes(iSigLen, pbOut + iCurIdx,
&iSigLenLen ) ) // length bytes for Certificate
   return false;
 iCurIdx += iSiqLenLen;
 memcpy( pbOut + iCurIdx, pbSig, iSigLen ); // bytes for
Certificate
 iCurIdx += iSiqLen;
 // third element of sequence -> algorithm
pbOut[ iCurIdx++ ] = (unsigned char) 0x02; // type code for INTEGER
```

```
pbOut[ iCurIdx++ ] = (unsigned char) 0x01; // length bytes for
value (assume 1)
 pbOut[ iCurIdx++ ] = byteAlgorithm; // algorithm constant
   return true:
@implementation CertBlobUtility
+ (NSString*) md5sum: (NSData*) certData
 CC MD5 CTX md5;
 CC MD5 Init(&md5);
 CC MD5 Update(&md5, [certData bytes], [certData length]);
   unsigned char digest[CC MD5 DIGEST LENGTH];
   CC MD5 Final(digest, &md5);
   NSString* s = [NSString stringWithFormat: @"%02x%02x%02x%02x%02x
digest[0], digest[1],
     digest[2], digest[3],
     digest[4], digest[5],
     digest[6], digest[7],
     digest[8], digest[9],
     digest[10], digest[11],
     digest[12], digest[13],
     digest[14], digest[15]];
   return s;
+ (NSString*) sha1: (NSData*) certData {
 unsigned char shalBuffer[CC SHA1 DIGEST LENGTH];
 CC SHA1 (certData.bytes, certData.length, sha1Buffer);
 NSMutableString *fingerprint = [NSMutableString
stringWithCapacity:CC SHA1 DIGEST LENGTH * 3];
 for (int i = 0; i < CC SHA1 DIGEST LENGTH; ++i)
    [fingerprint appendFormat:@"%02x",sha1Buffer[i]];
 return [fingerprint stringByTrimmingCharactersInSet:
[NSCharacterSet whitespaceCharacterSet]];
// SSOCertManager makeCertBlob: used by getCertBlob: API below
// Makes a certBlob from given certificate and private key and
returns it
+ (NSData *) makeCertBlob: (SecCertificateRef) certificate
andPrivateKey: (SecKeyRef) privateKey {
   NSData *sigData;
   NSData *certData;
   CFDataRef certCFData = SecCertificateCopyData(certificate);
   unsigned char certDigest[CC SHA1 DIGEST LENGTH];
```

```
CC SHA1 ( CFDataGetBytePtr(certCFData),
CFDataGetLength(certCFData), certDigest);
   certData = [NSData dataWithBytes:CFDataGetBytePtr(certCFData)
length:CFDataGetLength(certCFData)];
   size t sigLen = 1024;
   uint8 t sigBuf[sigLen];
    // Encrypt the digest of the certificate with private key
   OSStatus err = SecKeyRawSign(privateKey, kSecPaddingPKCS1,
                                 certDigest,
CC SHA1 DIGEST LENGTH, //data.bytes, data.length,
                                 sigBuf, &sigLen);
   if (err == noErr) {
       sigData = [NSData dataWithBytes:sigBuf length:sigLen];
   if (certCFData != NULL)
       CFRelease (certCFData);
   if ( ( certData == nil ) || ( sigData == nil ) )
       return nil;
   int iLength = 0;
   if ( (!makeCertBlob( (unsigned char *)[certData bytes],
[certData length], (unsigned char *)[sigData bytes], [sigData
length], 1, NULL, &iLength ) ) || ( iLength == 0 ) )
       return nil;
   unsigned char* pBuf = (unsigned char*) malloc(iLength);
   if (!makeCertBlob( (unsigned char *) [certData bytes], [certData
length], (unsigned char *)[sigData bytes], [sigData length], 1, pBuf,
&iLength ) ) {
       free ( pBuf );
       return nil;
    }
   NSData* certBlob = [NSData dataWithBytes:pBuf length:iLength];
   free ( pBuf );
   return certBlob;
@end
```

Connection APIs

The Connection APIs contain methods for managing local database information, establishing a connection with the SAP Mobile Server, and authenticating.

SUPConnectionProfile

The SUPConnectionProfile class manages local database information. Set its properties, including the encryption key, during application initialization, and before creating or accessing the local client database.

By default, the database class name is generated as "packageName"+"DB".

```
SUPConnectionProfile* cp = [SMP101SMP101DB getConnectionProfile]; [cp setPageSize:4*1024]; [cp setEncryptionKey:@"Your key of more than 16 characters"]; // Immediately after the call to setEncryptionKey, call [SMP101SMP101DB closeConnection]; to ensure that old connections with the wrong key are no longer being used. [SMP101SMP101DB closeConnection];
```

Note: If you set the page size to a negative value, the framework uses a default value of 4K as the page size.

You can also generate an encryption key by calling the generated database's generateEncryptionKey method, and then store the key inside a DataVault object. The generateEncryptionKey method automatically sets the encryption key in the connection profile.

You can use the cacheSize API to control the size of the memory cache used by the database. The default size is 10MB.

```
SUPConnectionProfile *cp = [SMP101SMP101DB getConnectionProfile];
[cp setCacheSize:5000000]; // set to 5000000 bytes (~ 5 MB)
[SMP101SMP101DB closeConnection]; // close and open the connection
to use the new cache size
[SMP101SMP101DB openConnection];
```

Managing Device Database Connections

Use the openConnection and closeConnection methods generated in the package database class to manage device database connections.

Note: Any database operation triggers the establishment of the database connection. You do not need to explicitly call the openConnection API.

The openConnection method checks that the package database exists, creates it if it does not, and establishes a connection to the database. This method is useful when first starting the application: since it takes a few seconds to open the database when creating the first connection, if the application starts up with a login screen and a background thread that performs the openConnection method, after logging in, the connection is most likely already established and is immediately available to the user.

All ConnectionProfile properties should be set before the first access to database, otherwise they will not take effect.

Client Object API Usage

The closeConnection method closes all database connections for this package and releases all resources allocated for those connections. This is recommended to be part of the application shutdown process.

Note: It is recommended that the next database operation API invoked after closeConnection is from the main thread.

<u>Improving Device Application Performance with One Writer Thread and Multiple Database Access Threads</u>

The maxDbConnections property improves device application performance by allowing multiple threads to access data concurrently from the same local database.

Connection management allows you to have at most one writer thread concurrent with multiple reader threads. There can be other reader threads at the same time that the writer thread is writing to the database. The total number of threads are controlled by the maxDbConnections property.

In a typical device application such as SAP Mobile CRM, a list view lists all the entities of a selected type. When pagination is used, background threads load subsequent pages. When the device application user selects an entry from the list, the detail view of that entry appears, and loads the details for that entry.

Prior to the implementation of maxDbConnections, access to the package on the local database was serialized. That is, an MBO database operation, such as, create, read, update, or delete (CRUD) operation waited for any previous operation to finish before the next was allowed to proceed. In the list view to detail view example, when the background thread is loading the entire list, and a user selects the details of one entry for display, the loading of details for that entry must wait until the entire list is loaded, which can be a long while, depending on the size of the list.

You can specify the number of total threads using maxDbConnections. The ConnectionProfile class in the persistence package includes the maxDbConnections property, which you set before performing any operation in the application. The default value (maximum number of concurrent read threads) is 2

```
SUPConnectionProfile *cp = [SMP101SMP101DB getConnectionProfile];
```

To allow 6 concurrent threads, set the maxDbConnections property to 6 in ConnectionProfile before accessing the package database at the beginning of the application.

```
cp.maxDbConnections = 6;
```

Set Database File Property

You can use setProperty to specify the database file name created in the Documents directory of the application, on the device or simulator.

```
SUPConnectionProfile *cp = [SMP101SMP101DB getConnectionProfile];
[cp setString:@"databaseFile":@"newDatabaseFileName"];
```

Usage

- Be sure to call this API before the database is created.
- The database is SQLite; use a database file name like mydb.db.
- If the device client user changes the file name, he or she must make sure the input file name is a valid name and path on the client side.

Synchronization Profile

The Synchronization Profile contains information for establishing a connection with the SAP Mobile Server's data synchronization channel where the server package has been deployed. The SUPConnectionProfile class manages that information. By default, this information includes the server host, port, domain name, certificate and public key that are pushed by the message channel during the registration process.

Settings are automatically provisioned from the SAP Mobile Server. The values of the settings are inherited from the application connection template used for the registration of the application connection (automatic or manual). You must make use of the connection and security settings that are automatically used by the Object API.

Typically, the application uses the settings as sent from the SAP Mobile Server to connect to the SAP Mobile Server for synchronization so that the administrator can set those at the application deployment time based on their deployment topology (for example, using Relay Server, using e2ee security, or a certificate used for the intermediary, such as a Relay Server Web server). See the *Applications* and *Application Connection Templates* topics in *System Administration*.

```
SUPConnectionProfile* sp = [SMP101SMP101DB
getSynchronizationProfile];
[sp setDomainName:@"default"];
```

Encryption and Trusted Certificates for Data Synchronization

When using end-to-end encryption for synchronization with SAP Mobile Server, the public keys need to be encapsulated in a PEM encoded X.509 certificate and be supplied with an E2EE private key. For example:

```
SUPConnectionProfile *sp = [SUP101SUP101DB
getSynchronizationProfile];
[sp
setNetworkStreamParams:@"e2ee_public_key=publickeyCertificate;trust
ed_certificates=trustedCertificate"];
```

For details about encryption on iPhone, see *iPhone and Mac OS X considerations* in the Ultralite documentation.

Connect the Data Synchronization Channel Through a Relay Server

To enable your client application to connect through a Relay Server, you can enter the related configuration in the application connection template through SAP Control Center, and/or setup the configuration properties in the synchronization profile using the object API.

If a Relay Server is used, the 'companyID' in the SUPApplication property must correspond to the MBS farm ID that is used for the messaging client connection.

```
SUPConnectionProperties props = app.connectionProperties;
[props setFarmId:@"relayServer1"];
```

For data synchronization through a Relay Server, synchronization properties need to be set if the corresponding application connection template in SAP Control Center does not have with the required values:

- Add the certificate file provided by the Relay Server to the Resource folder of your Xcode project.
- Add the following code before calling [SMP101SMP101DB subscribe]:

```
SUPConnectionProfile *sp = [SMP101SMP101DB
getSynchronizationProfile];
[sp setUser:@"xxxx"]; //required
[sp setPassword:@"xxxx"]; //required
[sp setNetworkProtocol:@"https"]; // or http, optional
[sp setPortNumber:443]; // if http then corresponding port,
optional
[sp
setNetworkStreamParams:@"trusted_certificates=certificateName;com
pression=zlib;url_suffix=urlsuffixProvidedByTheRelayServer"]; //
optional
```

- **NetworkProtocol** http or https.
- **PortNumber** the correct port number for the selected NetworkProtocol.
- NetworkStreamParams certificateName: the name of the certificate you added in the Resource folder.

urlsuffixProvidedByTheRelayServer: the RBS URL suffix provided by the Relay Server.

For more information on Relay Server configuration, see *System Administration* and *SAP Control Center for SAP Mobile Platform*.

Authentication APIs

You can log in to the SAP Mobile Server with your user name and credentials and use the X. 509 certificate you installed in the task flow for single sign-on.

Logging In

The generated package database class provides a default synchronization connection profile according to the SAP Mobile Server connection profile and server domain selected during code generation. You can log in to the SAP Mobile Server with your user name and credentials.

Note: For non-DOE-based applications, do not use beginOnlineLogin. Instead, just set the user name and password in the synchronization profile and immediately call subscribe.

The package database class provides methods for logging in to the SAP Mobile Server:

• – set the user name and password in the connection profile and authenticate credentials against the SAP Mobile Server.

```
SUPConnectionProfile *syncProfile = [SUP101SUP101DB
getSynchronizationProfile];
[syncProfile setUser:@"user"];
[syncProfile setPassword:@"password"];
[SUP101SUP101DB onlineLogin];
```

Importing an X.509 Certificate to an iOS Client from the SAP Mobile Server

Log in to SAP Mobile Server and authenticate a client using a generated X.509 certificate instead of a user name and password combination.

- 1. Copy the X.509 certificate used for authentication into a directory on the same host as the SAP Mobile Server. For example, c:\certs.
- 2. Create a registry string value on the SAP Mobile Server at HKLM\Software\Sybase \Sybase Messaging Server\CertificateLocation and populate it with the path. For example, c:\certs.

Note: For 64-bit servers, use the registry key "HKEY_LOCAL_MACHINE\SOFTWARE \Wow6432Node\Sybase\Sybase Messaging Server\CertificateLocation"

- 3. Name the X.509 certificate file as domain_user.p12, where *domain* is the SAP Mobile Server domain and *user* is the certificate user. The user must have read permission for .p12 file.
- **4.** The system administrator must ensure the specified domain\user has "logon as batch job" permission on the Windows machine on which the SAP Mobile Server runs:
 - a) Double-click Control Panel > Administrative Tools > Local Security Policies.
 - b) Expand Local Policies and select User Rights Assignment.
 - c) Right-click **Log on as a batch job** and select **Properties**.
 - d) Select Add User or Group and add the domain\user.

- **5.** The account under which the SAP Mobile Server runs must have adequate permissions to impersonate the domain\user. For example, the Administrator account for the domain.
- **6.** Include code that imports the certificate from the SAP Mobile Server, and sets up the login credentials for the package.

```
// Import certificate from server
SUPLoginCertificate *lc = [cs
getSignedCertificateFromServer:@"<ServerName>\\ssotest"
withServerPassword:@"sls2o3T4" withCertPassword:@"password"];
[[LogInfo sharedInstance]
testPassed:@"SAPSSOCertTest" :@"GetCertificateFromServer"];
NSLog(@"Imported certificate from server: subjectCN =
%@",lc.subjectCN);

// Attach certificate to sync profile
sp.certificate = lc;
[lc release];
while ([SUPApplication connectionStatus] !=
SUPConnectionStatus_CONNECTED) {
   NSLog(@"waiting to connect...");
   sleep(2);
}
```

7. Perform a database subscribe and synchronize as appropriate.

Sample Code: Setting Up Login Credentials

Illustrates importing the certificate and setting up login credentials, as well as other APIs related to certificate handling:

```
//// SSO certificate APIs
@trv
SUPConnectionProfile *sp = [SMP101SMP101DB
getSynchronizationProfile];
[sp setDomainName:@"ssocert"];
// Get handle to the certificate store
SUPCertificateStore *cs = [SUPCertificateStore getDefault];
// Getting certificate from a file bundled with the app
NSString *certPath = [[NSBundle mainBundle]
pathForResource:@"sap101"
ofType:@"p12"];
SUPLoginCertificate *lc resource = [cs
getSignedCertificateFromFile:certPath withPassword:@"password"];
NSLog(@"Got certificate from resource file, subjectCN =
%@",lc resource.subjectCN);
[[LogInfo sharedInstance]
testPassed:@"SAPSSOCertTest" :@"GetCertificateFromResourceFile"];
// Getting certificate from file in Documents directory
NSArray *arrayPaths =
NSSearchPathForDirectoriesInDomains (NSDocumentDirectory,
NSUserDomainMask,
```

```
YES):
NSString *docDir = [arrayPaths objectAtIndex:0];
certPath = [NSString stringWithFormat:@"%@/sap101.p12",docDirl;
SUPLoginCertificate *lc doc = [cs
getSignedCertificateFromFile:certPath withPassword:@"password"];
NSLog(@"Got certificate from documents directory file, subjectCN =
%@",lc doc.subjectCN);
[[LogInfo sharedInstance]
testPassed:@"SAPSSOCertTest" :@"GetCertificateFromDocumentsFile"];
// Distinguished name property
NSLog(@"Test distinguished name property, should be null: DN =
%@", lc doc.distinguishedName);
// Import certificate from server
SUPLoginCertificate *lc = [cs
getSignedCertificateFromServer:@"<ServerName>\\ssotest"
withServerPassword:@"s1s2o3T4" withCertPassword:@"password"];
[[LogInfo sharedInstance]
testPassed:@"SAPSSOCertTest" :@"GetCertificateFromServer"];
NSLog(@"Imported certificate from server: subjectCN =
%@",lc.subjectCN);
// Storage and retrieval of certificate
if(![SUPDataVault vaultExists:@"vaultTest"])
vault = [SUPDataVault createVault:@"vaultTest"
withPassword:@"vaultPassword" withSalt:@"vaultSalt"];
else
vault = [SUPDataVault getVault:@"vaultTest"];
[vault lock];
[vault unlock: @"vaultPassword" withSalt: @"vaultSalt"];
[lc save:@"test" withVault:vault];
[vault lock];
[vault unlock:@"vaultPassword" withSalt:@"vaultSalt"];
NSLog(@"Certificate stored. Now get the cert from the data
vault....");
SUPLoginCertificate *lc2 = [SUPLoginCertificate load:@"test"
withVault: vault];
[vault lock];
NSLog(@"Certificate retrieved successfully: subjectCN =
%@",lc2.subjectCN);
if([lc2.subjectCN isEqualToString:lc.subjectCN])
[[LogInfo sharedInstance]
testPassed:@"SAPSSOCertTest" :@"SaveAndLoadCertificate"];
else
[[LogInfo sharedInstance]
testFailed:@"SAPSSOCertTest" :@"SaveAndLoadCertificate"];
[1c2 release];
NSLog(@"Test getting a nonexistent certificate from the vault, see if
we get the right exception...");
BOOL noCertificatePass = NO;
@try
SUPLoginCertificate *lc none = [SUPLoginCertificate load:@"bogus"
withVault:vault];
} @catch(SUPDataVaultException* e)
```

```
noCertificatePass = YES:
NSLog(@"Got exception when trying to get nonexistent cert, exception
is %@: %@",[e name],[e reason]);
if (noCertificatePass)
[[LogInfo sharedInstance]
testPassed:@"SAPSSOCertTest" :@"NonExistentCertificate"];
else
[[LogInfo sharedInstance]
testFailed:@"SAPSSOCertTest" :@"NonExistentCertificate"];
// Delete certificate
BOOL deletePass = YES;
// Try to get the deleted certificate, should get an exception:
SUPLoginCertificate *1c3 = nil;
[vault unlock: @"vaultPassword" withSalt: @"vaultSalt"];
@try
[SUPLoginCertificate delete:@"test" withVault:vault];
lc3 = [SUPLoginCertificate load:@"test" withVault:vault];
deletePass = NO;
} @catch(NSException* e)
NSLog(@"Exception getting deleted cert: %@: %@",[e name],[e
reasonl);
deletePass = YES;
NSLog(@"Retrieve cert that was deleted, should be null: 1c3 =
%@",1c3);
if(lc3 != nil) deletePass = NO;
if (deletePass)
[[LogInfo sharedInstance]
testPassed:@"SAPSSOCertTest" :@"DeleteCertificate"];
else
[[LogInfo sharedInstance]
testFailed:@"SAPSSOCertTest" :@"DeleteCertificate"];
// changeVaultPassword for LoginCertificate
[vault lock];
[vault unlock:@"vaultPassword" withSalt:@"vaultSalt"];
[vault changePassword:@"newPassword" withSalt:@"vaultSalt"];
[vault lock];
[vault unlock: @"newPassword" withSalt: @"vaultSalt"];
[lc save:@"test" withVault:vault];
[vault lock];
[vault unlock:@"newPassword" withSalt:@"vaultSalt"];
SUPLoginCertificate *lc4 = [SUPLoginCertificate load:@"test"
withVault:vault];
[vault lock];
[vault unlock:@"newPassword" withSalt:@"vaultSalt"];
// Change password back so we can rerun the test
[vault changePassword:@"vaultPassword" withSalt:@"vaultSalt"];
[vault lock];
```

```
if([lc4.subjectCN isEqualToString:lc.subjectCN])
[[LogInfo sharedInstance]
testPassed:@"SAPSSOCertTest" :@"ChangeVaultPassword"];
else
[[LogInfo sharedInstance]
testFailed:@"SAPSSOCertTest" :@"ChangeVaultPassword"];
[lc4 release];
// Attach certificate to sync profile
sp.certificate = lc;
[lc release];
@catch(NSException *e)
MBOLogError(@"Exception in getting certificate");
MBOLogError(@"%@: %@",[e name],[e reason]);
[pool drain];
return;
// If package requires login first, use beginOnlineLogin API
// which takes no parameters
while ([SUPApplication connectionStatus] !=
SUPConnectionStatus CONNECTED) {
 NSLog(@"waiting to connect...");
 sleep(2);
[CrmDatabase beginOnlineLogin];
```

Sample Code: Mutual Authentication

Illustrates client configuration to support mutual authentication, as well as other APIs related to certificate handling:

Load all referenced certificates into the application Xcode project first.

```
//Step 1: Set up the CA certificates trusted by the client for mutual
authentication.
//You need to do this only if your server certificate is NOT signed
by the public CA
//the trusted certificate must be in DER format; the CN (common
name) of the server certificate
//must match the server name, set via the connection properties in
the step 3.
SUPApplication* app = [SUPApplication getInstance];
SUPConnectionProperties* props = app.connectionProperties;
//Load the trusted certificate
NSString *trustedCertPath = [[NSBundle mainBundle]
pathForResource:@"server trusted" ofType:@"crt"];
NSData *trustedData = [NSData
dataWithContentsOfFile:trustedCertPath];
SecCertificateRef trusted cert = SecCertificateCreateWithData(NULL,
```

```
(CFDataRef) trustedData);
//Create an array of SecCertificateRef objects
CFMutableArrayRef certs = CFArrayCreateMutable (NULL, 1,
&kCFTvpeArravCallBacks);
CFArrayAppendValue (certs, (CFDataRef) trusted cert);
//Set to SUPConnectionProperties
[props setTrustedCertificates:certs];
CFRelease (trusted cert);
CFRelease (certs);
Step 2: //Get the client's login certificate; Client identity file
must be in pkcs12 format;
//Client identity file must be encrypted with non-empty password;
NSString *certPath = [[NSBundle mainBundle]
pathForResource:@"client identity" ofType:@"p12"];
SUPCertificateStore *cs = [SUPCertificateStore
getDefaultl:
SUPLoginCertificate *lc resource = [cs
getSignedCertificateFromFile:certPath withPassword:@"password"];
props.loginCertificate = lc resource;
//Step 3: Register the application
[props
setNetworkProtocol:SUPConnectionProperties NETWORK PROTOCOL HTTPS];
[props setServerName:self.server];
[props setPortNumber:self.port];
[props setUrlSuffix:@""];
[props setFarmId:self.farmID];
props.activationCode = nil;
@trv
  if (app.registrationStatus != SUPRegistrationStatus REGISTERED)
      [app registerApplication:300];
  else
      [app startConnection:300];
  @catch (NSException *exception)
  NSLog(@"%@: %@",[exception name],[exception reason]);
//Step 4: Configure for data synchronization
SUPConnectionProfile *sp = [TestDB getSynchronizationProfile];
```

```
[sp setPortNumber:2482];
//specify trusted cert, and identity cert, and identity cert
// if the same identity cert is used with application registration,
you don't need to specify
// "identity" and "identity password" here, otherwise, you need to
specify them.
// specify server trusted CA cert; this could be different from the
certificate used in step1
// depending on server configuration.
// In any case, server trusted CA needs to be specified for data
synchronization in networkstreamparams.
setNetworkStreamParams:@"trusted certificates=server trustedCA.crt;
identity=client identity.p12;
identity password=password"];
//Data synchronize
[TestDB synchronize];
```

Single Sign-On With X.509 Certificate Related Object API

Use these classes and attributes when developing mobile applications that require X.509 certificate authentication.

- SUPCertificateStore class wraps platform-specific key/certificate store class, or file directory
- SUPLoginCertificate class wraps platform-specific X.509 distinguished name and signed certificate
- SUPConnectionProfile class includes the certificate attribute used for SAP Mobile Server synchronization.
- SUPDataVault class provides secure persistent storage on the device for certificates.

Refer to the API Reference for implementation details.

Importing a Certificate into the Data Vault

Obtain a certificate reference and store it in a password-protected data vault to use for X.509 certificate authentication.

```
// Obtain a reference to the certificate store
SUPCertificateStore *certStore = [SUPCertificateStore getDefault];

// Import a certificate from iPhone keychain (into memory)

NSString *label = ...; // ask user to select a label
NSString *password = ...; // ask the user for a password
SUPLoginCertificate *cert = [certStore getSignedCertificate:label
withPassword:password];
```

```
// Alternate code: import a certificate blob from the server into
memory (server must be specially configured for this):
NSString *windows username = .... // Windows username for fileshare
on server where the password is stored
NSString *windows password = .... // Windows password
NSString *cert password = .... // Password to unlock the certificate
SUPLoginCertificate *cert = [certStore
getSignedCertificateFromServer:windows username
withServerPassword:windows password
withCertPassword:cert password];
// Lookup or create data vault
NSString *vaultPassword = ...; // ask user or from O/S protected
storage
NSString *vaultName = "..."; // e.g. "SAP.CRM.CertificateVault"
NSString *vaultSalt = "..."; // e.g. a hard-coded random GUID
SUPDataVault *vault;
@trv
// Get vault, or create it if it doesn't exist
        if(![SUPDataVault vaultExists:vaultName])
            vault = [SUPDataVault createVault:vaultName
withPassword:vaultPassword withSalt:vaultSalt];
        else
            vault = [SUPDataVault getVault:vaultName];
// Save certificate into data vault
        [vault unlock:vaultPassword withSalt:vaultSalt];
        [cert save:label withVault:vault];
@catch (NSException *ex)
    // Handle any errors
@finally
    // Make sure vault is locked even if an error occurs
    [vault lock];
```

Selecting a Certificate for SAP Mobile Server Connections

Select the X.509 certificate from the data vault for SAP Mobile Server authentication.

```
@try
{
     [vault unlock:vaultPassword withSalt:vaultSalt];
     SUPLoginCertificate *cert = [SUPLoginCertificate load:@"myCert"
withVault:vault];
     SUPConnectionProfile *syncProfile = [SMP101SMP101DB
getSynchronizationProfile];
     syncProfile.certificate = cert;
     [cert release];
```

```
}
@catch(NSException *ex)
    // Handle any errors
}
@finally
{
    // Make sure vault is locked even if an error occurs
    [vault lock];
}
```

Connecting to SAP Mobile Server with a Certificate

Once the certificate property is set, call the subscribe and synchronize methods.

```
[SMP101SMP101DB subscribe];
[SMP101SMP101DB synchronize];
```

Personalization APIs

Personalization keys allow the application to define certain input parameter values that are personalized for each mobile user. Personalization parameters provide default values for synchronization parameters when the synchronization key of the object is mapped to the personalization key while developing a mobile business object. The Personalization APIs allow you to manage personalization keys, and get and set personalization key values.

Type of Personalization Keys

There are three types of personalization keys: client, server, and transient (or session). Client personalization keys are persisted in the local database. Server personalization keys are persisted on the SAP Mobile Server. Session personalization keys are not persisted and are lost when the device application terminates.

A personalization parameter can be a primitive or complex type.

A personalization key is metadata that enables users to store their search preferences on the client, the server, or by session. The preferences narrow the focus of data retrieved by the mobile device (also known as the filtering of data between the client and the SAP Mobile Server). Often personalization keys are used to hold backend system credentials, so that they can be propagated to the EIS. To use a personalization key for filtering, it must be mapped to a synchronization parameter. The developer can also define personalization keys for the application, and can use built-in personalization keys available in the SAP Mobile Server. Two built-in (session) personalization keys — username and password — can be used to perform single sign-on from the device application to the SAP Mobile Server, authentication and authorization on the SAP Mobile Server, as well as connecting to the back-end EIS using the same set of credentials. The password is never saved on the server.

Getting and Setting Personalization Key Values

The PersonalizationParameters class is generated automatically for managing personalization keys. When a personalization parameter value is changed, the call to save automatically propagates the change to the server.

Consider a personalization key "pkcity" that is associated with the synchronization parameter "cityname". The following example shows how to get and set personalization key values:

```
//get personalization key values
SMP101PersonalizationParameters *pp = [SMP101SMP101DB
getPersonalizationparameters];
MBOLogInfo(@"Personalization Parameter for City = %@", pp.PKCity);

//Set personalization key values
pp.PKCity = @"Hull";
[pp.save]; //save the new pk value.
[SMP101SMP101DB synchronize];
```

If a synchronization parameter is personalized, you can overwrite the value of that parameter with the personalization value.

Synchronization APIs

You can synchronize mobile business objects (MBOs) based on synchronization parameters, for individual MBOs, or as a group, based on the group's synchronization policy.

Managing Synchronization Parameters

Synchronization parameters let an application change the parameters that retrieve data from an MBO during a synchronization session.

The primary purpose of synchronization parameters is to partition data. Change the synchronization parameters to affect the data you are working with (including searches), and synchronization.

To add a synchronization parameter:

```
SKPKCustomerSubscription *sp = [SKPKCustomerSubscription
getInstance];
sp.name = @"example";
[SKPKCustomer addSubscription:sp];
```

To list all synchronization parameters:

```
SUPObjectList* r = [SKPKCustomer getSubscriptions];
```

To remove a synchronization parameter:

```
SUPObjectList* r = [SKPKCustomer getSubscriptions];
SKPKCustomerSubscription* sub = (SKPKCustomerSubscription*)[r item:
```

```
0];
[SKPKCustomer removeSubscription:sub];
```

Performing Mobile Business Object Synchronization

A synchronization group is a group of related MBOs. A mobile application can have predefined synchronization groups. An implicit default synchronization group includes all the MBOs that are not in any other synchronization group.

Before you can synchronize MBO changes with the server, you must subscribe the mobile application package deployed on the server by calling SMP101DB.subscribe(). This also downloads certain data to devices for those that have default values. You can use the OnImportSuccess method in the defined CallbackHandler to check if data download has been completed.

You can then call the **submitPendingOperations:(NSString*)synchronizationGroup** operation through the publication.

You can use a publication mechanism, which allows as many as 32 simultaneous synchronizations. However, performing simultaneous synchronizations on several very large SAP Mobile Server applications can impact server performance, and possibly affect other remote users.

The package database class includes two synchronization methods. You can synchronize a specified group of MBOs using the synchronization group name:

```
[SMP101SMP101DB submitPendingOperations:@"mySyncGroup"];
```

Or, you can synchronize all synchronization groups:

[SMP101SMP101DB submitPendingOperations];

Message-Based Synchronization APIs

The message-based synchronization APIs enable a user application to subscribe to a server package, to remove an existing subscription from the SAP Mobile Server, to suspend or resume requests to the SAP Mobile Server, and to recover data related to the package from the server.

Note: The beginOnlineLogin, suspendSubbscription, resumeSubscription, and vacuumDatabase methods are for use with DOE-based applications only.

beginOnlineLogin

Sends a login message to the SAP Mobile Server with the username and password.

Typically, the generated package database class already has a valid synchronization connection profile and you can log in to the SAP Mobile Server with your username and credentials.

beginOnlineLogin sends a message to the SAP Mobile Server with the username and password. The SAP Mobile Server responds with a message to the client with the login success or failure. This method checks the SUPApplication connectionStatus and immediately fails if the status is not SUPConnectionStatus_CONNECTED. Make sure the connection is active before calling beginOnlineLogin, or implement the onLoginFailure callback handler to catch cases where it may fail, otherwise an exception may be thrown.

When the login succeeds, the onLoginSuccess method of the CallbackHandler is invoked. When the login fails, the onLoginFailure method of the CallbackHandler is invoked.

Syntax

+ (void) beginOnlineLogin: (NSString *) user password: (NSString *) pass

Parameters

- **userName** the user name.
- **password** the password.

Returns

None.

Examples

• **Begin an Online Login** – Start logging in with "supAdminID" for the user name and "supPass" for the password.

```
[SMP101SMP101DB beginOnlineLogin:@"supAdminID" password:@"supPwd"];
```

subscribe

Subscribes to a server package. A subscription message is sent to the SAP Mobile Server and the application receives a subscription request result notification from the the SAP Mobile Server. If the subscription succeeds, the onSubscribeSuccess method of the ICallbackHandler is invoked. If the subscription fails, the onSubscribeFailure method of the ICallbackHandler is invoked.

Prerequisites for using **subscribe**:

- The mobile application is compiled with the client framework and deployed to a mobile device, together with the SAP Mobile Platform client process.
- The device application has already configured SAP Mobile Server connection information.

 Authentication credentials must also be set, using either the beginOnlineLogin or offlineLogin APIs.

Syntax

+(void) subscribe

Parameters

• None – subscribe has no parameters.

Returns

None.

Examples

• Subscribe to a Sample Application – Subscribe to SMP101SMP101DB.

```
[SUP101SUP101DB subscribe];
```

unsubscribe

Removes an existing subscription to a server package. An unsubscription message is sent to the SAP Mobile Server and the application receives a subscription request result notification from the SAP Mobile Server as a notification. The data on the local database is cleaned. If the unsubscribe succeeds, the onSubscribeSuccess method of the CallbackHandler is invoked. If it fails, the onSubscribeFailure method of the CallbackHandler is invoked.

The device application must already have a subscription with the server.

Syntax

+(void) unsubscribe

Parameters

• None – unsubscribe has no parameters.

Returns

None.

Examples

• Unsubscribe from a Sample Application – Unsubscribe from SMP101SMP101DB.

```
[SMP101SMP101DB unsubscribe];
```

suspendSubscription

Sends a suspend request to the SAP Mobile Server to notify the server to stop delivering data changes. A suspend subscription message is sent to the SAP Mobile Server and the application

receives a suspend subscription request result notification from the SAP Mobile Server as a notification. If the suspend succeeds, the onSuspendSubscriptionSuccess method of the CallbackHandler is invoked. If the suspend fails, the onSuspendSubscriptionFailure method of the CallbackHandler is invoked.

Syntax

+ (void) suspendSubscription

Parameters

• None – suspendSubscription has no parameters.

Returns

None.

Examples

• **Suspend a Subscription** – Suspend the subscription to SMP101SMP101DB.

[SMP101SMP101DB suspendSubscription];

beginSynchronize

Sends a message to the SAP Mobile Server to synchronize data between the client and the server. There are two different beginSynchronize APIs, one with no parameters that synchronizes all the groups, and one that takes a list of groups.

The synchronization completes in the background through an asynchronous message exchange with the server. If application code needs to know when the synchronization is complete, a callback handler that implements the onSynchronize method must be registered with the database class.

In RBS, beginSynchronize creates a synchronize request, and puts it in the request queue; the synchronization thread processes the sync request, and does the synchronization automatically in the background. The synchronization thread can combine several synchronization requests and send them to the server. For each synchronization request, a SUPSynchronizationStatus_STARTING status is sent to the onSynchronize user callback function before the synchronization, and a SUPSynchronizationStatus_FINISHING status is sent to onSynchronize after the synchronization.

Syntax

```
+(void) beginSynchronize
+(void) beginSynchronize[:(SUPObjectList*)synchronizationGroups]
[withContext:(NSString*)context]
```

Parameters

• **synchronizationGroups** – specifies a list of a list of SUPSynchronizationGroup objects representing the groups to be synchronized. If omitted, begin synchronizing data for all groups.

Note: This parameter is not relevant for DOE packages; pass a null value to this parameter.

• **context** – a reference string used when the server responds to the synchronization request. For more information on the onSynchronize callback handler method, see *Callback Handlers* in *Developer Guide for iOS*.

Returns

None.

Examples

• **Synchronize Data between Client and Server** – Synchronize data for SMP101DB for all synchronization groups.

```
// Sync all groups
[SMP101SMP101DB beginSynchronize];
```

• **Synchronize a Particular Group** – Synchronize data for SMP101DB for the SMP101 group.

```
// Sync all groups
[SMP101SMP101DB beginSynchronize];

// Sync just for particular groups. In this case, we just synchronize one group,
// the group for the SMP101Customer MBO.

SUPObjectList *sgs = [SUPObjectList getInstance];
[sgs add:[SMP101Customer getSynchronizationGroup]];
[SMP101SMP101DB beginSynchronize:sgs withContext:@"customergroupcontext"];
```

resumeSubscription

Sends a resume request to the SAP Mobile Server.

The resume request notifies the SAP Mobile Server to resume sending data changes for the subscription that had been suspended. On success, **onResumeSubscriptionSuccess** callback handler method is called. On failure, **onResumeSubscriptionFailure** callback handler is called.

Syntax

```
+(void) resumeSubscription
```

Parameters

None – resumeSubscription has no parameters.

Returns

None.

Examples

• **Resume a Subscription** – Resume the subscription to SMP101SMP101DB.

```
[SMP101SMP101DB resumeSubscription];
```

recover

Sends a recover request to the SAP Mobile Server.

The recover message notifies the SAP Mobile Server to send down all the data related to the package.

Note: Do not use recover with DOE-based applications.

Syntax

+(void) recover

Parameters

• None – recover has no parameters.

Returns

On success, onRecoverSuccess callback handler method is called. On failure, onRecoverFailure callback handler is called.

Examples

• - Send down all data for SUP101SUP101DB.

```
[SUP101SUP101DB recover];
```

Push Synchronization Applications

Clients receive device notifications when a data change is detected for any of the MBOs in the synchronization group to which they are subscribed.

SAP Mobile Platform uses a messaging channel to send change notifications from the server to the client device. By default, change notification is disabled. You can enable the change notification of a synchronization group: If you see that setInterval is set to 0, then change detection is disabled, and notifications will not be delivered. Enable change detection and

notification delivery by setting an appropriate value. For recommendations, see *Configuring Synchronization Groups* in *SAP Control Center for SAP Mobile Platform*.

```
id<SUPSynchronizationGroup> sg = [SMP101SMP101DB
getSynchronizationGroup:@"TCNEnabled"];
  if (![sg enableSIS]) {
      [sg setEnableSIS:YES];
      [sg setInterval:2];
      [sg save];
      [SMP101SMP101DB synchronize:@"PushEnabled"];
}
```

When the server detects changes in an MBO affecting a client device, and the synchronization group of the MBO has change detection enabled, the server will send a notification to client device through messaging channel. By default, a background synchronization downloads the changes for that synchronization group. The application can implement the onSynchronize callback method to monitor this condition, and either allow or disallow background synchronization.

```
- (SUPSynchronizationActionType) onSynchronize: (SUPObjectList
*) syncGroupList withContext: (SUPSynchronizationContext *) context
{
    switch ([context status]) {
        case SUPSynchronizationStatus_STARTING_ON_NOTIFICATION:
        if (allowBackGroundSync)
        {
            return SUPSynchronizationAction_CONTINUE;
        }
        else
        {
            return SUPSynchronizationAction_CANCEL;
        }
        break;
    default:
        return SUPSynchronizationAction_CONTINUE; // return continue
for all other cases
        break;
}
```

Resumable Synchronization

The resumable synchronization APIs enable an interrupted synchronization with partial data downloaded to the device to resume from the point of interruption, without restarting the entire download again.

Resumable synchronization is particularly useful when you synchronize large data sets, and do not want to have to cancel or roll back any partially downloaded data. You can resume the synchronization that meets all of these conditions:

Client Object API Usage

- It must be within the lifetime of the application. You cannot resume the session after the application terminates, for example if the application is closed.
- The resumable option must be set before calling synchronization.
- The synchronization must be performed asynchronously in background mode.
- There is partial data downloaded to the device when the interruption occurs.

Synchronization can be interrruped by either environmental changes (for example, a dropped connection) or when the application code disables or cancels the synchronization (for example, by calling [DB disableSync] or setting SUPSyncStatusInfo state to "SYNC_STATE_CANCEL" in the SUPSyncStatusListener onGetSyncStatusChange method).

Application code disables or cancels the synchronization for any reason –

Note: You cannot resume synchronization if the MobiLink Server restarts, since all pending downloads are lost.

If your callback handler is registered, and if some data has downloaded data before the interruption, this status is returned in the SUPCallbackHandler onSynchronize method at the time of the interruption:

```
SUPSynchronizationStatus INTERRUPTED WITH PARTIAL DATA
```

The system locks the synchronization queue in a pending synchronization mode that waits for the response to either resume or cancel.

The application determines when to resume the synchronization. The resume Synchronization API first releases the locked synchronization queue, then sends a resume synchronization request to the server. If the request is too early, the resumption may fail immediately if the connection is not yet available. However, if the request is sent too late, the download data may no longer be available on the server.

See the topic *Configuring Resumable Synchronization* in the *SAP Control Center for SAP Mobile Server* collection for information about setting a cache storage size for resumable download data. The default cache size is 5 GB.

Resumable Synchronization API

Resume an interrupted synchronization where partial data has been downloaded to the device.

Syntax

To resume a pending synchronization, call:

```
[DB resumePendingSynchronization]
```

The application can also determine when to cancel synchronization. For example, you could add logic to the application that sets a max retry resume to cancel the pending synchronization when the application reaches the max setting. The cancel pending synchronization API also unlocks the locked synchronization queue first, but instead of sending a synchronization

request, it rolls back any partial data that has already downloaded to the device. To not resume the pending synchronization, call:

```
[DB cancelPendingSynchronization];
```

- When the system is in a pending synchronization state, waiting for either a resume pending synchronization request by calling resumePendingSynchronization API or a cancellation request by calling cancelPendingSynchronization, the synchronization queue is locked. Any other new blocking or non-blocking synchronization requests are not permitted. Making such a synchronization call raises an exception with the SYNC_QUEUE_FROZEN error code.
- 2. If partial data has not downloaded to the device when the interruption occurs, for example, the device is uploading data to the server, or the server is still fetching data from the EIS, the synchronization request terminates immediately and the client reverts to standard behavior. If the interruption is due to:
 - Environmental changes instead of receiving a SUPSynchronizationStatus_INTERRUPTED_WITH_PARTIAL_DATA status, SUPSynchronizationStatus_ERROR and the exception in the sync context is returned.
 - Application code disables or cancels the synchronization for any reason a SUPSynchronizationAction_CANCEL status is returned.
- 3. The UltraLite[®] database runs with default isolation of read committed by default. Therefore, when interruption occurs and the application is in pending synchronization mode, the partially downloaded data is not visible to the application until resume synchronization completes the download.

Examples

Sample code for submitting non-blocking synchronization

```
"""
"""
"""
"""
//turn on the resume synchronization option
[[TestCRUDTestCRUDDB getSynchronizationProfile]
setResumeSynchronization:YES];

MyCallbackHandlerForResumeSync *callback =
    [MyCallbackHandlerForResumeSync
myCallbackHandlerForResumeSync];

[TestCRUDTestCRUDDB registerCallbackHandler:callback];

MyResumeSyncStatusListener *listener =
[[MyResumeSyncStatusListener alloc] init];

SUPObjectList *groups = [SUPObjectList getInstance];
[groups add:[TestCRUDTestCRUDDB
getSynchronizationGroup:@"default"]];

//submit a non-blocking sync request
```

```
[TestCRUDTestCRUDDB beginSynchronize:groups withContext:nil
    withUploadOnly:NO withSyncStatusListener:listener];
...
...
```

 CallbackHandler sample code in receiving SUPSynchronizationStatus_INTERRUPTED_WITH_PARTIAL_DATA status

```
//in the implementation of SUPDefaultCallbackHandler class
- (SUPSynchronizationActionType)onSynchronize:(SUPObjectList *)
  syncGroupList withContext:(SUPSynchronizationContext *)context
   //sending a NOTE CALLBACK ONSYNC TRIGGERED notification with
the synchronization context object
   NSNotification *note =
      [NSNotification
notificationWithName:NOTE CALLBACK ONSYNC TRIGGERED
object:contextl;
      [self performSelectorOnMainThread:@selector(notify:)
withObject:note waitUntilDone:NO];
    switch (context.status)
      case
SUPSynchronizationStatus INTERRUPTED WITH PARTIAL DATA:
       self.isInterruptedWithPartialData = YES;
   // By returning continue, the system waits for a request to
resume or cancel the pending synchronization.
   // The synchronization queue is locked and disallows accepting
any new incoming synchronization requests.
   // If returning SUPSynchronizationAction CANCEL instead, the
system automatically cancels the pending synchronization.
   // Application cannot resume the synchronization.
   // The synchronization queue is not locked and starts to accept
new synchronization requests.
      return SUPSynchronizationAction CONTINUE;
      break;
    }
```

• Sample code for resuming or canceling synchronization on sync callback status changed notification for the "NOTE_CALLBACK_ONSYNC_TRIGGERED" in previous sample

```
//that's if the observer is added for
"NOTE CALLBACK ONSYNC TRIGGERED"
[[NSNotificationCenter defaultCenter] addObserver:self
selector:@selector(onSyncCallbackStatusChanged:)
name: NOTE CALLBACK ONSYNC TRIGGERED object: nil];
- (void) onSyncCallbackStatusChanged: (NSNotification
*)notification
   SUPSynchronizationContext *context =
(SUPSynchronizationContext *) notification.object;
   if (context.status ==
SUPSynchronizationStatus INTERRUPTED WITH PARTIAL DATA)
    // cancel the pending synchronization when the interrupted
status count reaches
   // the max as the application does not want to keep on trying
to resume.
   // MAX INTERRUPTED STATUS number defined by the application
code can be set to
   // a very a large number.
       if (MAX INTERRUPTED STATUS == self.interruptedStatusCount)
            [self cancelPendingSync];
           self.label.text = [NSString stringWithFormat:@"Resume
sync is canceled.
            \n\tInterrupted status count reached the max: %d.",
MAX INTERRUPTED STATUS];
        else
            self.isInterruptedWithPartialData = YES;
            self.interruptedStatusCount++;
           //interrupted status received is not due to sync being
disable - say by calling [DB disableSync]
            //in applicationDidEnterBackground.
            if (!self.isSyncDisabled)
                NSDate *beginTime = [NSDate date];
                // Provide your own logic in
"isDeviceConnectedToInternet" to use Reachability
                // API to check network connectivity before
resumption attempt
                while(![self isDeviceConnectedToInternet])
                    NSDate *now = [[NSDate alloc]
initWithTimeIntervalSinceNow:0.0];
                   // TIMEOUT defined by the application code to
determine when the
```

```
// application should stop checking for network
connectivity in
                   // case network connectivity never comes back.
                    if ([now timeIntervalSinceDate:beginTime]
>TIMEOUT)
                       NSLog(@"There is no network connection %d
minute(s)", timeout/60]);
                       [now release];
                       break;
                    [NSThread sleepForTimeInterval:1.0];
                    [now release];
                if ([self isDeviceConnectedToInternet])
                    [self resumeSync];
                else
                    [self cancelPendingSync];
                   self.label.text = @"Resume sync is canceled.\n
\tthere's no network connectivity for too long. ";
- (void) cancelPendingSync
   NSLog(@"going to cancel pending sync...");
   if (![TestCRUDTestCRUDDB cancelPendingSynchronization])
        NSLog(@"\tfailed to cancel pending syn");
    else
       NSLog(@"\tpending sync has been cancelled.");
 (void) resumeSync
    if (!self.isInterruptedWithPartialData)
      NSLog(@"no resume as there is no interrupted with partiald
data");
      return;
   NSLog(@"going to resume sync...");
    BOOL resumed = [TestCRUDTestCRUDDB
resumePendingSynchronization];
    self.isInterruptedWithPartialData = NO;
   if (!resumed)
```

```
{
   NSLog(@"\tfailed to resume pending syn");
} else
{
   self.resumeSyncCount++;
   NSLog(@"\tresume sync count: %d", self.resumeSyncCount)];
}
}...
...
...
...
```

Sample code for AppDelegate to disable synchronization and enable synchronization in the background/foreground

```
...

    (void)applicationDidEnterBackground: (UIApplication

*)application
   NSLog(@"AppDelegate: did eneter background and about to
disableSync");
   [TestCRUDTestCRUDDB disableSync];
  // Notify the observer that the application disables/interrupts
the synchronization.
   // If it receives the
SUPSynchronizationStatus INTERRUPTED WITH PARTIAL DATA status
  // from callback onSynchronize call later, do not try to resume
immediately.
  NSNotification *n = [NSNotification]
notificationWithName:NOTE SYNC DISABLED object:nil];
   [self performSelectorOnMainThread:@selector(notify:)
withObject:n waitUntilDone:NO];
   if([SUPApplication connectionStatus] ==
SUPConnectionStatus CONNECTED ||
      [SUPApplication connectionStatus] ==
SUPConnectionStatus CONNECTING)
        [SUPApplication stopConnection:0];
· (void) application WillEnterForeground: (UIApplication
*)application
    dispatch queue t queue =
dispatch get global queue (DISPATCH QUEUE PRIORITY HIGH, 0);
    dispatch async(queue, ^
       @try
```

```
// Enable the synchronization. This does not resume the
pending synchronization.
        // Instead it just sets the internal syncEnabled flag to
true so that the synchronization
        // later on process would not be interrupted or canceled.
         [TestCRUDTestCRUDDB enableSync];
         NSNotification *n = [NSNotification]
notificationWithName: NOTE SYNC ENABLED object:nil];
         [self performSelectorOnMainThread:@selector(notify:)
withObject:n waitUntilDone:NO];
         [SUPApplication startConnection:30];
       @catch (NSException *ee)
              // log an error or alert user via notification
 (void) onSyncDisabled: (NSNotification *) notification
    self.isSyncDisabled = YES;
  (void) onSyncEnabled: (NSNotification *) notification
{
    self.isSyncDisabled = NO;
    [self resumeSync];
```

Resumable Synchronization Recommendations

Consider these recommendations when implementing resumable synchronization.

- Set a max resume-attempt in your code so the application does not continuously try to resume and fail for the same reason. If the max count is reached, the sync is canceled.
- Check for connectivity before attempting to resume the synchronization. The code can be implemented to wait a short time to recheck connectivity, along with a timeout period to wait a sufficient amount of time.
- Add code that obtains a flag indicating that the sync is disabled when interruption occurs
 because the application code disables or cancels the synchronization for any reason. For
 example, the application is running in the background, and you want to resume only when
 the application is running in the foreground.

Log Record APIs

The Log Record APIs allow you to customize aspects of logging.

- Writing and retrieving log records (successful operations are not logged).
- Configuring log levels for messages reported to the console.
- Enabling the printing of server message headers and message contents, database exceptions, and SUPLogRecord objects written for each import.
- Viewing detailed trace information on database calls.

Log records are automatically created when an operation replay fails in the SAP Mobile Server. If an operation replay succeeds, there is no LogRecord created by default (note that an SAP default result checker may write a log record even when the SAP operation succeeds). To get the confirmation when an operation replay succeeds, register a CallbackHandler and implement the CallbackHandler.onReplaySuccess method.

See Developer Guide: iOS Object API Applications > Client Object API Usage > Callback and Listener APIs.

SUPLogRecord API

Every package has a LogRecordImpl table in its own database. The SAP Mobile Server can send import messages with LogRecordImpl records as part of its response to replay requests (success or failure). LogRecord stores two types of logs.

- Operation logs on the SAP Mobile Server. These logs can be downloaded to the device.
- Client logs. These logs can be uploaded to the SAP Mobile Server.

The SAP Mobile Server can embed a "log" JSON array into the header of a server message; the array is written to the LogRecordImpl table by the client. The client application can also write its own records. Each entity has a method called newLogRecord, which allows the entity to write its own log record. The LogRecordImpl table has "component" and "entityKey" columns that associate the log record entry with a particular MBO and primary key value.

```
SUPObjectList *salesorders = [SMP101Sales_order findAll];
  if([salesorders size] > 0)
{
    SMP101Sales_order * so = [salesorders item:0];
    SMP101LogRecordImpl *lr = [SMP101LogRecordImpl getInstance];
    lr.message = :@"testing record"];
    lr.level = [SUPLogLevel INFO];
    [lr save];

    // submitting log records
    [SMP101SMP101DB submitLogRecords];
    // synchronize with server
    [SMP101SMP101DB synchronize:@"system"];
```

```
}
}
```

You can use the getLogRecords method to return log records from the table.

```
SUPQuery *query = [SUPQuery getInstance];
SUPObjectList *loglist = [SMP101SMP101DB getLogRecords:query];
for(id o in loglist)
{
    LogRecordImpl *log = (LogRecordImpl*)o;
    MBOLogError(@"Log Record %llu: Operation = %@, Timestamp =
    %@,
    MBO = %@, key= %@,message=%@",log.messageId,log.operation,
    [SUPDateTimeUtil
toString:log.timestamp],log.component,log.entityKey,log.message);
}
```

Each mobile business object has a getLogRecords instance method that returns a list of all the log records that have been recorded for a particular entity row in a mobile business object:

```
SUPObjectList *salesorders = [SMP101Sales_order findAll];
if([salesorders size] > 0)
{
   SMP101Sales_order * so = [salesorders item:0];
   SUPObjectList *loglist = [so getLogRecords];
   for(id o in loglist)
   {
      LogRecordImpl *log = (LogRecordImpl*)o;
      MBOLogError(@"Log Record %llu: Operation = %@, Timestamp =
   %@,
      MBO = %@, key= %@,message=%@",log.messageId,log.operation,
      [SUPDateTimeUtil
toString:log.timestamp],log.component,log.entityKey,log.message);
   }
}
```

Mobile business objects that support dynamic queries can be queried using the synthetic attribute hasLogRecords. This attribute generates a subquery that returns true if an entity row has any log records in the database, otherwise it returns false. The following code example prints out a list of customers, including first name, last name, and whether the customer row has log records:

```
SUPQuery *query = [SUPQuery getInstance];
[query select:@"x.surrogateKey,x.fname,x.hasLogRecords"];
[query from:@"Customer":@"x"];
SUPQueryResultSet *qrs = [SMP101SMP101DB executeQuery:query];
MBOLogError(@"%@",[qrs.columnNames toString]);
for(SUPDataValueList *row in qrs.array)
{
    MBOLogError(@"%@",[row toString]);
}
```

If there are a large number of rows in the MBO table, but only a few have log records associated with them, you may want to keep an in-memory object to track which rows have log records. You can define a class property as follows:

NSMutableArray* customerKeysWithLogRecords;

After data is downloaded from the server, initialize the array:

```
customerKeysWithLogRecords = [[NSMutableArray alloc]
initWithCapacity:20];
SUPObjectList *allLogRecords = [SMP101SMP101DB getLogRecords:nil];
for(id<SUPLogRecord> lr in allLogRecords)
{
  if(([lr entityKey] != nil) && ([[lr component] compare:@"Customer"]
== 0))
  [customerKeysWithLogRecords addObject:[lr entityKey]];
}
```

You do not need database access to determine if a row in the Customer MBO has a log record. The following expression returns true if a row has a log record:

```
BOOL hasALogRecord = [customerKeysWithLogRecords containsObject:
[customerRow keyToString]];
```

This sample code shows how to find the corresponding MBO with the LogRecord and to delete the log record when a record is processed.

```
- (void)processLogs
 SUPQuery *query = [SUPQuery getInstance];
 SUPObjectList *logRecords = [SMP101SMP101DB getLogRecords:query];
 for(id<SUPLogRecord> log in logRecords)
   // Log warning message
   NSLog(@"log %@: %@ code:%d msg:%@",[log component],[log
entityKey], [log code], [log message]);
   if([[log component] isEqualToString:@"Customer"])
     NSNumberFormatter *formatter = [[NSNumberFormatter alloc]
init];
     int64 t surrogateKey = [[formatter numberFromString:[log
entityKey]] longLongValue];
     [formatter release];
     SMP101Customer *c = [SMP101Customer find:surrogateKey];
     if (c.pending)
     [c cancelPending];
     [log delete];
     [log submitPending];
  [SMP101SMP101DB beginSynchronize];
```

A LogRecord is not generated for a successful operation replay. SAP Mobile Server only creates one when an operation fails or completes with warnings. The client is responsible for removing operation replay log records. SAP Mobile Server typically allows a period of time for the client to download and act on the operation replay log record. Therefore, the client should proactively remove these log records when they are consumed. Failure to do so may

result in accumulation of operation replay log records until SAP Mobile Server removes them. This sample code illustrates how to find the corresponding MBO with the LogRecord and delete the log record when it is processed.

```
private void processLogs()
   Query query = new Query();
   GenericList<LogRecord> logRecords =
SMP101DB.getLogRecords(guery);
   for(LogRecord log : logRecords)
      // log warning message
     Log.warning("log " + log.getComponent()
     + ":" + log.getEntityKey()
      + " code: " + log.getCode() + " msg: " + log.getMessage());
      if (log.getComponent().equals("Customer"))
         long surrogateKey = Long.parseLong(log.getEntityKey());
         Customer c = Customer.find(surrogateKev);
         if (c.isPending())
            c.cancelPending();
         // delete the LogRecord after it is processed
         log.delete();
         log.submitPending();
```

SAP Mobile Server is responsible for deleting client log records uploaded by the application. These application logs are used for audit and/or support services. Determine and set the retention policy from SAP Control Center after consulting with the application's developers. If there are multiple applications using the same package, retain them based on the maximum required time for each application. Client log records are removed that are outside the retention window, and deleted records removed from the client database the next time the application synchronizes. See *Improve Synchronization Performance by Reducing the Log Record Size* in *Troubleshooting* for details about reducing the Log Record size.

Logger APIs

Use the Logger API to set the log level and create log records on the client.

Each package has a Logger. To obtain the package logger, use the getLogger method in the generated database class. The Logger is an abstraction over the LogRecord API to write records of various log levels into the LogRecord MBO on the client database.

```
// Retrieve SUPLogger from the database class
SUPLogger logger = [SMP101DB getLogger];

// Set the log level for the logger
// Application can use getLogLevel to determine the current log level
```

```
setting for the Logger
[logger setLogLevel:[SMPLogLevel DEBUG]];

// create a log record at DEBUG level
[logger debug:@"Some debug message"];

// Prepare all outstanding client generated log records for upload
[logger submitLogRecords];
```

Log Level and Tracing APIs

The MBOLogger class enables the client to add log levels to messages reported to the console. The application can set the log level using the setLogLevel method.

In ascending order of detail (or descending order of severity), the log levels defined are LOG_OFF (no logging), LOG_FATAL, LOG_ERROR, LOG_WARN, LOG_INFO, and LOG_DEBUG.

Macros such as MBOLogError, MBOLogWarn, and MBOLogInfo allow application code to write console messages at different log levels. You can use the method setLogLevel to determine which messages get written to the console. For example, if the application sets the log level to LOG_WARN, calls to MBOLogInfo and MBOLogDebug do not write anything to the console.

```
[MBOLogger setLogLevel:LOG_INFO];

MBOLogInfo(@"This log message will print to the console");

[MBOLogger setLogLevel:LOG_WARN];

MBOLogInfo(@"This log message will not print to the console");

MBOLogError(@"This log message will print to the console");
```

Tracing APIs

The SQL tracing API enables tracing of client database operations, and message headers sent to and received from the SAP Mobile Server. The API is configured in the connection profile and synchronization profile.

```
SUPConnectionProfile *cp = [SMP101SMP101DB getConnectionProfile];

// To enable trace of client database operations (SQL statements, etc.)
[cp enableTrace:YES];

// To enable trace of client database operations with values also displayed
[cp enableTrace:YES withPayload:YES];

// To disable trace of client database operations
[cp enableTrace:NO];

// To enable trace of message headers sent to the server and received from the server
// (this replaces the MBODebugLogger and MBODebugSettings used in earlier versions of SAP Mobile Platform)
[cp.syncProfile enableTrace:YES];
```

```
// To enable trace of both message headers and content, including
credentials
[cp.syncProfile enableTrace:YES withPayload:YES];

// To disable messaging trace
[cp.syncProfile enableTrace:NO];
```

Printing Log Messages

The following code example retrieves log messages resulting from login failures where the SAP Mobile Server writes the failure record into the LogRecordImpl table. You can implement the onLoginFailure callback to print out the server message.

```
SUPQuery * query = [SUPQuery getInstance];
SampleAppLogRecordImplList* loglist = (SUP101LogRecordImplList*)
[SMP101SMP101DB getLogRecords:query];
  for(SMP101LogRecordImpl* log in loglist)
  {
    MBOLogError(@"Log Record %llu: Operation = %@, Component = %@,
message = %@", log.messageId, log.operation,
log.component,log.message);
}
```

Change Log API

The change log allows a client to retrieve entity changes from the back end. If a client application already has a list view constructed, it simply needs to add, modify, or delete entries in the list according to the change logs.

A single ChangeLog is generated for each changed entity. If the changed entity is a child of a composite relationship, there is also a ChangeLog for its parent root entity.

entityType

Returns the entity type.

Syntax

```
    (int)entityType
```

Parameters

None.

Returns

Returns the entity type.

Examples

• Get the Entity Type

```
SUPObjectList *changeLogs = [SUP101SUP101DB getChangeLogs:
[SUPQuery getInstance]];
if([changeLogs size] > 0)
{
    for (id<SUPChangeLog> cl in changeLogs)
      {
        MBOLogInfo(@"changelog:[entityType=%d]\n", [cl
entityType]);
    }
}
```

operationType

Returns the operation type of the MBO.

Syntax

- (unichar) operationType

Parameters

None.

Returns

The operation type of the MBO. Possible values are 'U' for update and insert, and 'D' for delete

Examples

Get the Operation Type

```
SUPObjectList *changeLogs = [SUP101SUP101DB getChangeLogs:
[SUPQuery getInstance]];
if([changeLogs size] > 0)
{
    for (id<SUPChangeLog> cl in changeLogs)
      {
        MBOLogInfo(@"changelog:[operationType=%C]\n", [cl
operationType]);
    }
}
```

rootEntityType

Returns the name of the root parent entity type.

Syntax

```
- (int)rootEntityType
```

Parameters

None

Returns

Returns the root entity type which is the root of the object graph.

Examples

• Get the Root Entity Type

```
SUPObjectList *changeLogs = [SUP101SUP101DB getChangeLogs:
[SUPQuery getInstance]];
if([changeLogs size] > 0)
{
   for (id<SUPChangeLog> cl in changeLogs)
    {
      MBOLogInfo(@"changelog:[rootEntityType=%d]\n", [cl
rootEntityType]);
   }
}
```

rootSurrogateKey

Returns the surrogate key of the root parent entity.

Syntax

- (long)rootSurrogateKey

Parameters

None.

Returns

The surrogateKey of the root entity.

Examples

· Get the Root Surrogate Key

```
SUPObjectList *changeLogs = [SUP101SUP101DB getChangeLogs:
[SUPQuery getInstance]];
if([changeLogs size] > 0)
{
    for (id<SUPChangeLog> cl in changeLogs)
      {
        MBOLogInfo(@"changelog:[rootSurrogateKey=%ld]\n", [cl
rootSurrogateKey]);
    }
}
```

surrogateKey

Returns the surrogate key of the entity.

Syntax

- (long) surrogateKey

Parameters

None.

Returns

The surrogate key of the affected entity. Note that the change log contains all affected entities, including children of the object graph.

Examples

• Get the Surrogate Key

```
SUPObjectList *changeLogs = [SUP101SUP101DB getChangeLogs:
[SUPQuery getInstance]];
if([changeLogs size] > 0)
{
   for (id<SUPChangeLog> cl in changeLogs)
   {
      MBOLogInfo(@"changelog:[surrogateKey=%ld]\n", [cl
surrogateKey]);
   }
}
```

Methods in the Generated Database Class

You can use generated methods in the package database class to manage change logs.

enableChangeLog

By default, Change Log is disabled. To enable the change log, invoke the enableChangeLog API in the generated database class. The next synchronization will have change logs sent to the client.

Syntax

+ (void) enableChangeLog

Returns

None.

Examples

Enable Change Log

```
[SMP101SMP101DB enableChangeLog];
```

getChangeLogs

Retrieve a list of change logs.

Syntax

```
+ (SUPObjectList*) getChangeLogs: (SUPQuery*) query
```

Returns

Returns a GenericList of type <Change Log>.

Examples

Get Change Logs

```
SUPObjectList *changeLogs = [SMP101SMP101DB getChangeLogs:
[SUPQuery getInstance]];
```

deleteChangeLogs

You are recommended to delete all change logs after the application has completed processing them. Use the deleteChangeLogs API in the generated database class to delete all change logs on the device.

Syntax

+ (void) deleteChangeLogs

Returns

None.

Examples

Delete Change Logs

```
[SMP101SMP101DB deleteChangeLogs];
```

Usage

Ensure that when calling deleteChangeLogs, there are no change logs created from a background synchronization that are not part of the original change log list returned by a specific query:

```
GenericList<ChangeLog> changes = getChangeLogs(myQuery);
```

You should only call deleteChangeLogs in the onSynchronize() callback where there are no multiple synchronizations occurring simultaneously.

disableChangeLog

Creating change logs consumes some processing time, which can impact application performance. The application may can disable the change log using the disableChangeLog API.

Syntax

```
+ (void) disableChangeLog
```

Returns

None.

Examples

• Disable Change Log

```
[SMP101SMP101DB.disableChangeLog];
```

Code Samples

Enable the change log and list all changes, or only the change logs for a particular entity, Customer.

```
// Retrieve all change logs
[SMP101SMP101DB enableChangeLog];
[SMP101SMP101DB synchronize];
SUPObjectList *changeLogs = [SUP101SUP101DB getChangeLogs:[SUPQuery
getInstance]];
if([changeLogs size] > 0)
    for (id<SUPChangeLog> cl in changeLogs)
       MBOLogInfo(@"changelog:[entityType=%d]\n", [cl entityType]);
// Retrieve only the change logs for Customer:
[SMP101SMP101DB enableChangeLog];
[SMP101SMP101DB synchronize];
SUPQuery *changelogQuery = [SUPQuery getInstance];
int entityInt = SMP101 ENTITY TYPE Customer;
changelogQuery.testCriteria = [SUPAttributeTest
equal:@"entityType" :[NSNumber numberWithInt:entityInt]];
SUPObjectList *changeLogs = [SMP101SMP101DB
getChangeLogs:changelogQuery ];
if([changeLogs size] > 0)
```

```
for (id<SUPChangeLog> cl in changeLogs)
{
    MBOLogInfo(@"changelog:[entityType=%d]\n", [cl entityType]);
}
```

Security APIs

The security APIs allow you to customize some aspects of connection and database security.

Encrypting the Client Database

There are two APIs that you can use to encrypt the client database.

generateEncryptionKey() causes a new random encryption key to be generated and used to encrypt the database. This key is immediately set in the connection profile.

```
NSString *newKey = nil;
[SUP101SUP101DB generateEncryptionKey];
newKey = [[SUP101SUP101DB getConnectionProfile] getEncryptionKey];
NSLog(@"generated encryption key = %@",newKey);
[SUP101SUP101DB closeConnection];
```

 $\verb|changeEncryptionKey| () causes the database to be encrypted with the new key passed in.$

```
[SUP101SUP101DB changeEncryptionKeyValueABCDEFG"]; [SUP101SUP101DB closeConnection];
```

Accessing a Previously Encrypted Database

If an application is starting up using a previously existing database that has been encrypted, the encryption key must be set in the connection profile before any database operations are done. This is done using the connection profile's setEncryptionKey() API.

```
[[SMP101SMP101DB getConnectionProfile] setEncryptionKey:newKey];
[SMP101SMP101DB closeConnection];
```

SUPDataVault

The SUPDataVault class provides encrypted storage of occasionally used, small pieces of data. All exceptions thrown by SUPDataVault methods are of type SUPDataVaultException.

By linking the libDatavault.a static library, you can use the SUPDataVault class for on-device persistent storage of certificates, database encryption keys, passwords, and other sensitive items. Use this class to:

- Create a vault
- Set a vault's properties

- Store objects in a vault
- · Retrieve objects from a vault
- · Change the password used to access a vault
- Control access for a vault that is shared by multiple iOS applications

The contents of the data vault are strongly encrypted using AES-128. The SUPDataVault class allows you create a named vault, and specify a password and salt used to unlock it. The password can be of arbitrary length and can include any characters. The password and salt together generate the AES key. If the user enters the same password when unlocking, the contents are decrypted. If the user enters an incorrect password, exceptions occur. If the user enters an incorrect password a configurable number of times, the vault is deleted and any data stored within it becomes unrecoverable. The vault can also relock itself after a configurable amount of time.

Typical usage of the SUPDataVault is to implement an application login screen. Upon application start, the user is prompted for a password, which unlocks the vault. If the unlock attempt is successful, the user is allowed into the rest of the application. User credentials for synchronization can also be extracted from the vault so the user need not reenter passwords.

createVault

Creates a new secure store (a vault).

A unique name is assigned, and after creation, the vault is referenced and accessed by that name. This method also assigns a password and salt value to the vault. If a vault with the same name already exists, this method throws an exception. A newly created vault is in the unlocked state.

Syntax

```
+ (SUPDataVault*)createVault:(NSString*)name withPassword:
(NSString*)password withSalt:(NSString*)salt;
```

Parameters

- name an arbitrary name for a DataVault instance on this device. This name is effectively the primary key for looking up DataVault instances on the device, so it cannot use the same name as any existing instance. If it does, this method throws an exception with error code INVALID_ARG. The name also cannot be empty or null.
- **password** the initial encryption password for this DataVault. This is the password needed for unlocking the vault. If null is passed, a default password is computed and used.
- salt the encryption salt value for this Data Vault. This value, combined with the password, creates the actual encryption key that protects the data in the vault. If null is passed, a default salt is computed and used.

Returns

Returns the newly created instance of the DataVault with the provided ID. The returned DataVault is in the unlocked state with default configuration values. To change the default

configuration values, you can immediately call the "set" methods for the values you want to change.

If a vault already exists with the same name, a SUPDataVaultException is thrown with the reason kDataVaultExceptionReasonAlreadyExists.

Examples

• Create a data vault – creates a new data vault called myVault.

vaultExists

Tests whether the specified vault exists, returns true if it does and false if the datavault is locked, does not exist, or is inaccessible for any other reason.

Syntax

```
+ (BOOL) vaultExists: (NSString*) name;
```

Parameters

• **name** – the vault name.

Returns

Returns true if the vault exists; otherwise returns false.

Examples

• Check if a data vault exists – checks if a data vault called myVault exists, and if so, deletes it.

```
if ([SUPDataVault vaultExists:@"myVault"])
```

```
{
    [SUPDataVault deleteVault:@"myVault"];
}
```

vaultExists2

Tests whether the specified vault exists, returns true if the vault exists; otherwise returns false. If an error occurs while reading the keychain, throws an

kDataVaultExceptionReasonIORead exception.

Syntax

```
+ (BOOL) vaultExists2: (NSString*) dataVaultID;
```

Parameters

• dataVaultID – the vault name

Returns

Returns true if the vault exists; otherwise returns false. If an error occurs while reading the keychain, throws an kDataVaultExceptionReasonIORead exception.

Examples

Check if a data vault exists – checks if a data vault called myVault exists, and if so, deletes it.

```
@try {
    if ([SUPDataVault vaultExists2:@"myVault"]) {
        [SUPDataVault deleteVault:@"myVault"];
    }
}
@catch (SUPDataVaultException *exception ) {
    //handle the exception
}
```

getVault

Retrieves a vault.

Syntax

```
+ (SUPDataVault*)getVault:(NSString*)name;
```

Parameters

• **name** – the vault name.

Returns

getVault returns a SUPDataVault instance.

If the vault does not exist, a SUPDataVaultException is thrown.

deleteVault

Deletes the specified vault from on-device storage.

If the vault does not exist, this method throws an exception. The vault need not be in the unlocked state, and can be deleted even if the password is unknown.

Syntax

```
+ (void) deleteVault: (NSString*) name;
```

Parameters

• **name** – the vault name.

Examples

• **Delete a data vault** – deletes a data vault called myVault.

```
@try
{
    if([SUPDataVault vaultExists:@"myVault"])
    {
        [SUPDataVault deleteVault:@"myVault"];
      }
}
@catch ( NSException *e )
{
      NSLog(@"SUPDataVaultException: %@",[e description]);
}
```

getDataNames

Retrieves information about the data names stored in the vault.

The application can pass the data names to getValue or getString to retrieve the data values.

Syntax

```
- (SUPObjectList *)getDataNames;
```

Parameters

None.

Returns

Returns a list of objects of type SUPDVDataName.

Examples

Get data names

```
// Call getDataNames to retrieve all stored element names from our
data vault
NSArray *dataNames = [dataVault getDataNames];
if (dataNames != nil) {
 DVDataName *dataName;
 for (NSInteger iIdx = 0; iIdx < [dataNames count]; iIdx++) {
    dataName = [dataNames objectAtIndex:iIdx];
    if (dataName.type == kDVDataTypeString) {
      // Stored value is of string type
      NSString *thisStringValue = [dataVault
getString:dataName.namel;
    else if (dataName.type == kDVDataTypeBinary) {
      // Stored value is of binary type
      NSData *thisBinaryValue = [dataVault
getValue:dataName.name];
    else {
     // Unknown type. Possibly stored using previous version of
dataVault
      // Try as string first and then as binary
      NSString *thisStringValue = [dataVault
getString:dataName.name];
      if (thisStringValue == nil) {
       NSData *thisBinaryValue = [dataVault
getValue:dataName.name];
     }
   }
  }
```

<u>setPasswordPolicy</u>

Stores the password policy and applies it when changePassword is called, or when validating the password in the unlock method.

If the application has not set a password policy using this method, the data vault does not validate the password in the createVault or changePassword methods. An exception is thrown if there is any invalid (negative) value in the passwordPolicy object.

Syntax

(void) setPasswordPolicy: SUPDVPasswordPolicy oPasswordPolicy;

Parameters

• **oPasswordPolicy** – the password policy constraints.

Examples

· Set a password policy

// setPasswordPolicy locks the vault to ensure the old password
conforms to the new password policy settings
[dataVault setPasswordPolicy:pwdPolicy];

Password Policy Structure

A structure defines the policy used to generate the password.

Table 2. Password Policy Structure

Name	Туре	Description
defaultPasswordAllowed	Boolean	Indicates if client application is allowed to use default password for the data Vault. If this is set to TRUE and if client application uses default password then min-Length, hasDigits, hasUpper, hasLower and hasSpecial parameters in the policy are ignored.
minimumLength	Integer	The minimum length of the password.
hasDigits	Boolean	Indicates if the password must contain digits.
hasUpper	Boolean	Indicates if the password must contain uppercase characters.
hasLower	Boolean	Indicates if the password must contain lowercase characters.
hasSpecial	Boolean	Indicates if the password must contain special characters. The set of special characters is: "~! @#\$%^&*()-+".
expirationDays	Integer	Specifies password expiry days from the date of setting the password. 0 indicates no expiry.

Name	Туре	Description
minUniqueChars	Integer	The minimum number of unique characters in the password. For example, if length is 5 and minUniqueChars is 4 then "aaate" or "ababa" would be invalid passwords. Instead, "aaord" would be a valid password.
lockTimeout	Integer	The timeout value (in seconds) after which the vault will be locked from the unlock time. 0 indicates no timeout. This value overrides the value set by set-LockTimeout method.
retryLimit	Integer	The number of failed unlock attempts after which data vault is deleted. 0 indicates no retry limit. This value overrides the value set by the setRetryLimit method.

Settings for Password Policy

The client applications use these settings to fill the PasswordPolicy structure. The default values are used by the data vault when no policy is configured. The defaults are also used in SAP Control Center in the default template. The SAP Mobile Platform administrator can modify these settings through SAP Control Center. The application must set the password policy for the data vault with the administrative (or alternative) settings.

Note: Setting the password policy locks the vault. The password policy is enforced when unlock is called (because the password is not saved, calling unlock is the only time that the policy can be evaluated).

- **PROP_DEF_PWDPOLICY_ENABLED** Boolean property with a default value of false. Indicates if a password policy is enabled by the administrator.
- PROP_DEF_PWDPOLICY_DEFAULT_PASSWORD_ALLOWED Boolean
 property with a default value of false. Indicates if the client application is allowed to use the
 default password for the data vault.
- **PROP_DEF_PWDPOLICY_MIN_LENGTH** Integer property with a default value of 0. Defines the minimum length for the password.
- **PROP_DEF_PWDPOLICY_HAS_DIGITS** Boolean property with a default value of false. Indicates if the password must contain digits.

- **PROP_DEF_PWDPOLICY_HAS_UPPER** Boolean property with a default value of false. Indicates if the password must contain at least one uppercase character.
- **PROP_DEF_PWDPOLICY_HAS_LOWER** Boolean property with a default value of false. Indicates if the password must contain at least one lowercase character.
- **PROP_DEF_PWDPOLICY_HAS_SPECIAL** Boolean property with a default value of false. Indicates if the password must contain at least one special character. A special character is a character in this set "~!@#\$%^&*()-+".
- PROP_DEF_PWDPOLICY_EXPIRATION_DAYS Integer property with a default
 value of 0. Specifies the number of days in which password will expire from the date of
 setting the password. Password expiration is checked only when the vault is unlocked.
- **PROP_DEF_PWDPOLICY_MIN_UNIQUE_CHARS** Integer property with a default value of 0. Specifies minimum number of unique characters in the password. For example, if minimum length is 5 and minUniqueChars is 4 then "aaate" or "ababa" would be invalid passwords. Instead, "aaord" would be a valid password.
- **PROP_DEF_PWDPOLICY_LOCK_TIMEOUT** Integer property with a default value of 0. Specifies timeout value (in seconds) after which the vault is locked from the unlock time. 0 indicates no timeout.
- **PROP_DEF_PWDPOLICY_RETRY_LIMIT** Integer property with a default value of 0. Specifies the number of failed unlock attempts after which data vault is deleted. 0 indicates no retry limit.

Password Errors

Password policy violations cause exceptions to be thrown.

Table 3. Password Errors

Name	Value	Description
PASSWORD_REQUIRED	50	Indicates that a blank or null password was used when the password policy does not allow default password.
PASSWORD_UN- DER_MIN_LENGTH	51	Indicates that the password length is less than the required minimum.
PASSWORD_RE- QUIRES_DIGIT	52	Indicates that the password does not contain digits.
PASSWORD_RE- QUIRES_UPPER	53	Indicates that the password does not contain upper case characters.

Name	Value	Description
PASSWORD_RE- QUIRES_LOWER	54	Indicates that the password does not contain lower case characters.
PASSWORD_RE- QUIRES_SPECIAL	55	Indicates that the password does not contain one of these special characters: ~!@#\$%^&*()-+.
PASSWORD_UN- DER_MIN_UNIQUE	56	Indicates that the password contains fewer than the minimum required number of unique characters.
PASSWORD_EXPIRED	57	Indicates that the password has been in use longer than the number of configured expiration days.

getPasswordPolicy

Retrieves the password policy set by setPasswordPolicy.

Use this method once the DataVault is unlocked.

Syntax

+ (SUPDataVault*)getPasswordPolicy:();

Parameters

None.

Returns

Returns a passwordPolicy structure that contains the policy set by setPasswordPolicy.

Returns a SUPDVPasswordPolicy object with the default values if no password policy is set.

Examples

Get the current password policy

```
// Use getPasswordPolicy to get the current policy set in the
vault
    pwdPolicy = [dataVault getPasswordPolicy];
```

lock

Locks the vault.

Once a vault is locked, you must unlock it before changing the vault's properties or storing anything in it. If the vault is already locked, lock has no effect.

Syntax

- (void) lock;

Examples

• Locks the data vault – prevents changing the vaults properties or stored content. [oVault lock];

isLocked

Checks whether the vault is locked.

Syntax

- (BOOL) isLocked;

Returns

Returns	Indicates
YES	The vault is locked.
NO	The vault is unlocked.

unlock

Unlocks the vault.

Unlock the vault before changing the its properties or storing anything in it. If the incorrect password or salt is used, this method throws an exception. If the number of unsuccessful attempts exceeds the retry limit, the vault is deleted.

The password is validated against the password policy if it has been set using setPasswordPolicy. If the password is not compatible with the password policy, an IncompatiblePassword exception is thrown. In that case, call changePassword to set a new password that is compatible with the password policy.

Syntax

- (void)unlock: (NSString*)password withSalt: (NSString*) salt;

Parameters

- **password** the encryption password for this DataVault. If null is passed, a default password is computed and used.
- **salt** the encryption salt value for this Data Vault. This value, combined with the password, creates the actual encryption key that protects the data in the vault. This value may be an application-specific constant. If null is passed, a default salt is computed and used.

Returns

If an incorrect password or salt is used, a SUPDataVaultException is thrown with the reason kDataVaultExceptionReasonInvalidPassword.

Examples

 Unlocks the data vault – once the vault is unlocked, you can change its properties and stored content.

```
@try
{
    [oVault unlock:@"password" withSalt:@"salt"];
}
@catch(SUPDataVaultException *e)
{
    NSLog(@"Exception will be thrown for bad password");
}
```

setString

Stores a string object in the vault.

An exception is thrown if the vault is locked when this method is called.

Syntax

```
- (void) setString: (NSString*) name withValue: (NSString*) value;
```

Parameters

- **name** the name associated with the string object to be stored.
- value the string object to store in the vault.

Examples

• **Set a string value** – creates a test string, unlocks the vault, and sets a string value associated with the name "testString" in the vault. The finally clause in the try/catch block ensures that the vault ends in a secure state even if an exception occurs.

```
NSString *teststring = @"ABCDEFabcdef";
@try {
```

```
[oVault unlock:@"goodPassword" withSalt:@"goodSalt"];
  [oVault setString:@"testString" withValue:teststring];
}
@catch (NSException *e) {
   NSLog(@"Exception: %@",[e description]);
}
@finally {
   [oVault lock];
}
```

getString

Retrieves a string value from the vault.

An exception is thrown if the vault is locked when this method is called.

Syntax

```
- (NSString*)getString:(NSString*)name;
```

Parameters

• **name** – the name associated with the string object to be retrieved.

Returns

Returns a string data value, associated with the specified name, from the vault.

Examples

• **Get a string value** – unlocks the vault and retrieves a string value associated with the name "testString" in the vault. The finally clause in the try/catch block ensures that the vault ends in a secure state even if an exception occurs.

```
NSString *retrievedstring = nil;

@try {
    [oVault unlock:@"goodPassword" withSalt:@"goodSalt"];
    retrievedstring = [oVault getString:@"testString"];
}
@catch (NSException *e) {
    NSLog(@"Exception: %@",[e description]);
}
@finally {
    [oVault lock];
}
```

setValue

Stores a binary object in the vault.

An exception is thrown if the vault is locked when this method is called.

Syntax

- (void) setValue: (NSString*) name withValue: (NSData*) value;

Parameters

- **name** the name associated with the binary object to be stored.
- value the binary object to store in the vault.

Examples

• **Set a binary value** – unlocks the vault and stores a binary value associated with the name "testValue" in the vault. The finally clause in the try/catch block ensures that the vault ends in a secure state even if an exception occurs.

```
@try {
    [oVault unlock:@"goodPassword" withSalt:@"goodSalt"];
    [oVault setValue:@"testValue" withValue:testvalue];
}
@catch (NSException *e) {
    NSLog(@"Exception: %@",[e description]);
}
@finally {
    [oVault lock];
}
```

getValue

Retrieves a binary object from the vault.

An exception is thrown if the vault is locked when this method is called.

Syntax

```
- (NSData*)getValue:(NSString*)name;
```

Parameters

• **name** – the name associated with the binary object to be retrieved.

Returns

Returns a binary data value, associated with the specified name, from the vault.

Examples

• **Get a binary value** – unlocks the vault and retrieves a binary value associated with the name "testValue" in the vault. The finally clause in the try/catch block ensures that the vault ends in a secure state even if an exception occurs.

```
NSData *retrievedvalue = nil;
```

Client Object API Usage

```
@try {
    [oVault unlock:@"goodPassword" withSalt:@"goodSalt"];
    retrievedvalue = [oVault getValue:@"testValue"];
}
@catch (NSException *e) {
    NSLog(@"Exception: %@",[e description]);
}
@finally {
    [oVault lock];
}
```

deleteValue

Deletes the specified value.

Syntax

```
+ (void) deleteValue: (NSString*) name;
```

Parameters

• **name** – the name of the value to be deleted.

Examples

• **Delete a value** – deletes a value called myValue.

```
[SUPDataVault deleteValue:@"myValue"];
```

changePassword (two parameters)

Changes the password for the vault. Use this method when the vault is unlocked.

Modifies all name/value pairs in the vault to be encrypted with a new password/salt. If the vault is locked or the new password is empty, an exception is thrown.

Syntax

```
- (void)changePassword: (NSString*)newPassword withSalt:
(NSString*)newSalt;
```

<u>Parameters</u>

- **newPassword** the new password.
- **newSalt** the new encryption salt value.

Examples

• Change the password for a data vault – changes the password to "newPassword". The finally clause in the try/catch block ensures that the vault ends in a secure state even if an exception occurs.

```
etry {
```

```
[oVault unlock:@"goodPassword" withSalt:@"goodSalt"];
  [oVault changePassword:@"newPassword" withSalt:@"newSalt"];
}
@catch (NSException *e) {
   NSLog(@"Exception: %@",[e description]);
}
@finally
{
   [oVault lock];
}
```

changePassword (four parameters)

Changes the password for the vault. Use this method when the vault is locked

This overloaded method ensures the new password is compatible with the password policy, uses the current password to unlock the vault, and changes the password of the vault to a new password. If the current password is not valid an InvalidPassword exception is thrown. If the new password is not compatible with the password policy set in setPasswordPolicy then an IncompatiblePassword exception is thrown.

Syntax

```
- (void) changePassword: (NSString*) currentPassword:
(NSString*) currentSalt: (NSString*) newPassword: (NSString*) newSalt;
```

Parameters

- **currentPassword** the current encryption password for this data vault. If a null value is passed, a default password is computed and used.
- **currentSalt** the current encryption salt value for this data vault. If a null value is passed, a default password is computed and used.
- **newPassword** the new encryption password for this data vault. If a null value is passed, a default password is computed and used.
- newSalt the new encryption salt value for this data vault. This value, combined with the
 password, creates the actual encryption key that protects the data in the vault. This value
 may be an application-specific constant. If a null value is passed, a default password is
 computed and used.

Examples

Change the password for a data vault

```
// Call changePassword with four parameters, even if the vault is
locked.
// Pass null for oldSalt and oldPassword if the defaults were
used.
```

```
[dataVault changePassword:nil currentSalt:nil newPassword:@"password!1A" newSalt:@"saltD#ddg#k05%gnd[!1A"];
```

setAccessGroup

Sets the access group if multiple application share a data vault.

This method is used only for iOS applications, and must be called before accessing any DataVault methods. The access group must be set only if a vault is shared by multiple iPhone applications. If the vault is used only by one application, do not set the access group. The access group is listed in the keychain-access-groups property of the entitlements plist file. The recommended format is ".com.yourcompany.DataVault".

Syntax

```
+ (void) setAccessGroup: (NSString *) accessGroup;
```

Parameters

• accessGroup – The access group name.

Examples

• Sets the Access Group Name – Sets the access group name so that multiple iOS applications can access the data vault.

```
[oVault setAccessGroup:@"accessGroupName.com.yourcompany.DataVault"];
```

Code Sample

188

Create a data vault for encrypted storage of application data.

```
SUPDataVault* dataVault = nil;
@try
 // If the dataVault already exists, call getVault and unlock it
 // If not, create the vault with necessary password
 // The password is chosen to make sure it satisfies password policy
criteria given below
 if ([SUPDataVault vaultExists:@"SampleVault"] ) {
   dataVault = [SUPDataVault getVault:@"SampleVault"];
    [dataVault unlock:@"password!1A" withSalt:@"saltD#ddg#k05%gnd[!
1A"];
 else {
   dataVault = [SUPDataVault createVault:@"SampleVault"
withPassword: @"password! 1A" withSalt: @"saltD#ddg#k05%gnd[!1A"];
 // Supply various criteria for password policy
 SUPDVPasswordPolicy *pwdPolicy = [[[SUPDVPasswordPolicy alloc]
init] autorelease];
```

```
pwdPolicy.defaultPasswordAllowed = YES;
 pwdPolicy.minLength = 4;
 pwdPolicy.hasDigits = YES;
 pwdPolicy.hasUpper = YES;
 pwdPolicy.hasLower = YES;
 pwdPolicy.hasSpecial = YES;
 pwdPolicv.expirationDavs = 20;
 pwdPolicy.minUniqueChars = 3;
 pwdPolicy.lockTimeout = 1600;
 pwdPolicy.retryLimit = 20;
 // setPasswordPolicy will lock the vault to ensure old password
conforms to new password policy settings
  [dataVault setPasswordPolicy:pwdPolicy];
 // You must unlock the vault after setting the password policy
 [dataVault unlock: @"password! 1A" withSalt: @"saltD#ddg#k05%gnd[!
1A"];
 // Use getPasswordPolicy to get the current policy set in the vault
 pwdPolicy = [dataVault getPasswordPolicy];
 NSLog(@" pwdPolicy %@ ",pwdPolicy.description);
 // Call setString by giving it a name: value pair to encrypt and
persist
 // a string data type within your dataVault.
  [dataVault setString:@"stringName" withValue:@"stringValue"];
 // Call getString to retrieve the string we just stored in our data
vault!
 NSString *storedStringValue = [dataVault getString:@"stringName"];
 NSLog(@" storedStringValue %@ ", storedStringValue.description);
 // Call setValue by giving it a name: value pair to encrypt and
persist
 // a binary data type within your dataVault unsigned char
acBinData[] = \{0x01, 0x02, 0x03, 0x04, 0x05, 0x06, 0x07\};
 [dataVault setValue:@"binaryName" withValue:[NSData
dataWithBytes:acBinData length:7]];
 // Call getValue to retrieve the binary we just stored in our data
 NSData *storedBinaryValue = [dataVault getValue:@"binaryName"];
 NSLog(@" storedBinaryValue %@ ", storedBinaryValue );
 // Call getDataNames to retrieve all stored element names from our
data vault
           NSArray * dataNames = [dataVault getDataNames];
 SUPObjectList * dataNames = [dataVault getDataNames];
 if ( dataNames != nil ) {
   SUPDVDataName *dataName;
                for ( NSInteger iIdx = 0; iIdx < [dataNames count];</pre>
iIdx++) {
   for ( NSInteger iIdx = 0; iIdx < [dataNames size]; iIdx ++) {</pre>
```

```
dataName = [dataNames objectAtIndex:iIdx];
      if ( dataName.type == SUPDVDataTypeString ) {
       // Stored value is of string type
       NSString *thisStringValue = [dataVault
getString:dataName.namel;
       NSLog(@" thisStringValue %@ ", thisStringValue );
      else if ( dataName.type == SUPDVDataTypeBinary ) {
       // Stored value is of binary type
       NSData *thisBinaryValue = [dataVault getValue:dataName.name];
       NSLog(@" thisBinaryValue %@ ",thisBinaryValue );
      else {
       // Unknown type. Possibly stored using previous version of
dataVault
       // Try as string first and then as binary
       NSString *thisStringValue = [dataVault
getString:dataName.name];
        if (thisStringValue == nil) {
         NSData *thisBinaryValue = [dataVault
getValue:dataName.name];
         NSLog(@" thisBinaryValue %@ ", thisBinaryValue );
    }
  }
  [dataVault changePassword:@"password!2A"
withSalt:@"saltD#ddg#k05%gnd[!2A"];
 // Because this is a test example, we will delete our vault at the
end.
 // This means we will forever lose all data we persisted in our data
vault.
  [SUPDataVault deleteVault: @"SampleVault"];
@catch ( SUPDataVaultException *e )
  NSNumber* errCode = (NSNumber *)[[e userInfo]
objectForKey:@"ErrorCode"];
  NSString* errMsg = (NSString *)[[e userInfo]
objectForKey:@"ErrorMessage"];
  NSLog(@"SUPDataVaultException: Code: %d , Message: %@",[errCode
intValue], errMsg);
```

Callback and Listener APIs

The callback and listener APIs allow you to optionally register a callback handler and listen for device events, application connection events, and package synchronize and replay events.

Callback Handler API

The SUPCallbackHandler protocol is invoked when any database event occurs. A default callback handler is provided, which basically does nothing. You should implement a custom CallbackHandler to register important events. The callback is invoked on the thread that is processing the event. A callback handler provides message notifications and success or failure messages related to message-based synchronization. To receive callbacks, register your own handler with a database. You can use SUPDefaultCallbackHandler as the base class. In your handler, override the particular callback you want to use (for example, onReplaySuccess).

Because both the database and entity handler can be registered, your handler may get called twice for a mobile business object import activity. The callback is executed in the thread that is performing the action. For example, onReplaySuccess is always called from a thread other than the main application thread.

When you receive the callback, the particular activity is already complete.

The SUPCallbackHandler protocol consists of these callbacks:

- **onReplayFailure:**(**id**)**entityObject;** invoked when a replay failure is received from the SAP Mobile Server, whenever a particular device sends a create, update, or delete operation and the operation fails (SAP Mobile Server rejects the requested operation).
- onReplaySuccess:(id)entityObject; invoked when a replay success is received from the SAP Mobile Server, whenever a particular device sends a create, update, or delete operation and the operation succeeds (SAP Mobile Server accepts the requested operation). The onReplaySuccess: (id)entityObject is an MBO object instance that contains the data prior to the synchronization. You can use the Change Log API to find records that occur after the synchronization.
- onImport:(id)entityObject; invoked when an import is received. If the SAP Mobile
 Server accepts a requested change, it sends one or more import messages to the client,
 containing data for any created, updated, or deleted row that has changed on the SAP
 Mobile Server as a result of the replay request. This method is for DOE-based
 applications only.
- onLoginFailure; invoked when a login failure message is received from the SAP Mobile Server.
- **onLoginSuccess**; called when a login result is received by the client.
- **onSubscribeFailure**; invoked when a subscribe failure message is received from the SAP Mobile Server, whenever an object in a subscribed entity changes.
- **onSubscribeSuccess**; invoked when a subscribe success message is received from the SAP Mobile Server, whenever an object in a subscribed entity changes.
- - (int32_t)onSynchronize:(SUPObjectList*)syncGroupList withContext:
 (SUPSynchronizationContext*)context; invoked when the synchronization status changes. This method is called by the database class synchronize or beginSynchronize methods when the client initiates a synchronization, and is called

again when the server responds to the client that synchronization has finished, or that synchronization failed.

The SUPSynchronizationContext object passed into this method has a "status" attribute that contains the current synchronization status. The possible statuses are defined in the SUPSynchronizationStatusType enum, and include:

- **SUPSynchronizationStatus_STARTING** passed in when synchronize or beginSynchronize is called.
- SUPSynchronizationStatus_UPLOADING synchronization status upload in progress.
- **SUPSynchronizationStatus_DOWNLOADING** synchronization status download in progress.
- **SUPSynchronizationStatus_FINISHING** synchronization completed successfully.
- **SUPSynchronizationStatus_ERROR** synchronization failed.
- SUPSynchronizationStatus_ASYNC_REPLAY_UPLOADED asynchronous replay has been uploaded.
- SUPSynchronizationStatus_ASYNC_REPLAY_COMPLETED asynchronous replay has been completed.
- SUPSynchronizationStatus_STARTING_ON_NOTIFICATION change notification has been received from the server.

For DOE-based applications, only the status values of STARTING, FINISHING, and ERROR are passed into this method.

This callback handler returns SUPSynchronizationActionCONTINUE, unless the user cancels synchronization, in which case it returns

SUPSynchronizationActionCANCEL. This code example prints out the groups in a synchronization status change:

```
MBOLogInfo(@"========"");
    return SUPSynchronizationActionCONTINUE;
}
```

- **onSuspendSubscriptionFailure**; invoked when a call to suspend fails.
- onSuspendSubscriptionSuccess; invoked when a suspend call is successful.
- **onResumeSubscriptionFailure**; invoked when a resume call fails.
- **onResumeSubscriptionSuccess**; invoked when a resume call is successful.
- **onUnsubscribeFailure:** invoked when an unsubscribe call fails.
- **onUnsubscribeSuccess:** invoked when an unsubscribe call is successful.
- **onImportSuccess**; invoked when on Import succeeds. This method is for DOE-based applications only.
- **onMessageException:**(**NSException*e**); invoked when an exception occurs during message processing. Other callbacks in this interface (whose names begin with "on") are invoked inside a database transaction. If the transaction is rolled back due to an unexpected exception, this operation is called with the exception (before the rollback occurs).
- onTransactionCommit; invoked on transaction commit.
- **onTransactionRollback**; invoked on transaction rollback.
- **onResetSuccess**; invoked when reset is successful.
- **onSubscriptionEnd;** invoked on subscription end. OnSubscriptionEnd can occur when the device is registered, unlike OnUnsubscribeSuccess.
- - (void)onMessageStart:(int)size withMethod:(NSString*)method withMbo: (NSString*)mbo; This method is for DOE-based applications only.

This method is called at the beginning of processing a message from the server, before the message transaction starts. Only the callback handler registered with the package database class is invoked. Parameters:

- **size** The size of the incoming message content in bytes.
- **method** The method string from the message header.
- **mbo** If this message is for a specific MBO, the name of the MBO; otherwise null.

This code example shows how to register a handler to receive a callback:

```
DBCallbackHandler* handler = [DBCallbackHandler newHandler];
[iPhoneSMTestDB registerCallbackHandler:handler];
[handler release];

MBOCallbackHandler* mboHandler = [MBOCallbackHandler newHandler];
[Product registerCallbackHandler:mboHandler];
[mboHandler release];
```

SUPApplicationCallback API

This callback protocol is invoked by events of interest to a mobile application.

You must register an SUPApplicationCallback implementation to your SUPApplication instance to receive these callbacks.

Note: These callbacks are not triggered by changes or errors in MobiLinkTM synchronization, which uses a different communication path than the one used for registration.

Table 4. Callbacks in the SUPApplicationCallback Interface

Callback	Description
- (void) onApplicationSetting- sChanged : (SUPString- List*) names	Invoked when one or more application settings have been changed by the server administration.
- (void) onConnectionStatu- sChanged : (SUPInt) connection- Status : (SUPInt) errorCode :	Invoked when the connection status changes. The possible connection status values are defined in the ConnectionStatus class.
(SUPNullableString)errorMes- sage	Note: Some of the connection status codes are not returned on certain client platforms due to platform operating system limitations.
- (void)onDeviceCondition- Changed : (SUPInt)deviceCondi- tion	Invoked when a condition is detected on the mobile device that may be of interest to the application or the application user. The possible device condition values are defined in the SUPDeviceCondition class.
- (void)onRegistrationStatu- sChanged :(SUPInt)registra- tionStatus :(SUPInt)error- Code :(SUPNullableString)er- rorMessage	Invoked when the registration status changes. The possible registration status values are defined in the SUPRegistrationStatus class.

Callback	Description
<pre>- (void) onHttpCommunicatio- nError : (int32_t) errorCode : (NSString*) errorMessage : (SUPStringProperties*) respon- seHeaders;</pre>	Invoked when an HTTP communication server/ MobiLink rejects HTTP/MobiLink communica- tion with an error code. • errorCode – Error code returned by the HTTP server or MobiLink. For example: code 401 for authentication failure, code 403 for authorization failure, and code 63 for Mo- biLink synchronization communication er- ror. • errorMessage – Error message returned by the HTTP server or MobiLink. • responseHeaders – Response headers re- turned by the HTTP server or MobiLink.
<pre>- (void) onCustomizationBund- leDownloadComplete : (NSString*) customization- BundleID: (int32_t) error- Code : (NSString*) errorMes- sage;</pre>	Invoked when the download of a resource bundle is complete. • errorCode – If download succeeds, returns 0. If download fails, returns an error code. • errorMessage – If download succeeds, returns "". If download fails, returns an error message. • RESOURCE_BUNDLE_NOTFOUND = 14881 • DOWNLOAD_RESOURCE_BUNDLE_STREAM_IS_NULL = 14882 • DOWNLOAD_RESOURCE_BUNDLE_FAILURE = 14883 • customizationBundleID – The name of the resource bundle. If null, the default application resource bundle is downloaded.

Callback	Description
(int)onPushNotification: (NSDictionary*)notification	Invoked if a push notification arrives. You can add logic here to handle the notification. This callback is not called when a notification arrives when the application is not online.
	returns – an integer to indicate if the notifi- cation has been handled. The return value is for future use. You are recommended to re- turn SUP_NOTIFICATION_CONTINUE.
	 0: SUP_NOTIFICATION_CONTINUE if the notification was not handled by the callback method. 1: SUP_NOTIFICATION_CANCEL if the notification has already been handled by the callback method.
	When iOS receives a notification from the Apple Push Notification Service for an application, it calls didReceiveRemoteNotification in the client application. Call the following API inside didReceiveRemoteNotine
	<pre>tification: +(void)pushNotification:(UIAp- plication*)application notifyDa- ta:(NSDictionary *)userInfo</pre>
	If
	+(void)pushNotification:(UIAp- plication*)application notifyDa- ta:(NSDictionary *)userInfo
	is added inside of didReceiveRemote- Notification, then only the callback method
	<pre>(int)onPushNotification :(NSDic- tionary*)notification</pre>
	is triggered.

Apple Push Notification API

The Apple Push Notification API allows applications to provide various types of push notifications to devices, such as sounds (audible alerts), alerts (displaying an alert on the

screen), and badges (displaying an image or number on the application icon). Push notifications require network connectivity.

The client library libclientrt wraps the Apple Push Notification API in the file SUPPushNotification.h.

In addition to using the Apple Push Notification APIs in a client application, you must configure the push configuration on the server. This is performed under **Server Configuration** > **Messaging** > **Apple Push Configuration** in SAP Control Center. You must configure the device application name (for push), the device certificate (for push), the Apple gateway, and the gateway port.

The following API methods of the SUPPushNotification interface abstract the SAP Mobile Server, resolve the push-related settings, and register with an Apple Push server, if required.

After a device successfully registers for push notifications through Apple Push Notification Service, iOS calls the

didRegisterForRemoteNotificationWithDeviceToken method in the client application. iOS passes the registered device token to this function. Call the deviceTokenForPush and setupForPush methods inside the didRegisterForRemoteNotificationWithDeviceToken method, or after the method. For example, you can store the device token and application parameters in variables and use them later to call deviceTokenForPush and setupForPush.

```
+ (void) setupForPush: (UIApplication*) application
+ (void) deviceTokenForPush: (UIApplication*) application deviceToken:
(NSData
*) devToken
```

If for any reason the registration with Apple Push Notification Service fails, iOS calls didFailToRegisterForRemoteNotificationsWithError in the client application. Call the following API inside

didFailToRegisterForRemoteNotificationsWithError:

```
+(void)pushRegistrationFailed:(UIApplication*)application errorInfo: (NSError *)err
```

When iOS receives a notification from Apple Push Notification Service for an application, it calls didReceiveRemoteNotification in the client application. Call the following API inside didReceiveRemoteNotification:

```
+ (void) pushNotification: (UIApplication*) application notifyData: (NSDictionary *) userInfo
```

SUPSyncStatusListener API

You can implement a synchronization status listener to track synchronization progress.

Note: This topic is not applicable for DOE-based applications.

Client Object API Usage

```
@class SUPSyncStatusInfo;
@protocol SUPSyncStatusListener <NSObject>
-(void)onGetSyncStatusChange:(SUPSyncStatusInfo*)info;
@end
```

As the application synchronization progresses, the method defined by the SUPSyncStatusListener protocol is called and is passed an SUPSyncStatusInfo object. The SUPSyncStatusInfo object contains information about the MBO being synchronized, the connection to which it is related, and the current state of the synchronization process. By testing the State property of the SUPSyncStatusInfo object and comparing it to the possible values in the SUPSyncStatusState enumeration, the application can react accordingly to the state of the synchronization.

The synchronization can be aborted by setting the "state" property of the SUPSyncStatusInfo object to the value SYNC_STATUS_CANCEL before the method returns.

```
info.state = SYNC_STATE_CANCEL;
```

This setting may be needed if the application goes into the background during a long synchronization.

The method returns false to allow synchronization to continue. If the method returns true, the synchronization is aborted.

Possible uses of method include changing form elements on the client screen to show synchronization progress, such as a green image when the synchronization is in progress, a red image if the synchronization fails, and a gray image when the synchronization has completed successfully and disconnected from the server.

Note: The method of SUPSyncStatusListener is called and executed in the data synchronization thread. If a client runs synchronizations in a thread other than the primary user interface thread, the client cannot update its screen as the status changes. The client must instruct the primary user interface thread to update the screen regarding the current synchronization status.

This is an example of SUPSyncStatusListener implementation:

```
// The interface file
#import "SUPSyncStatusListener.h"
#import "SUPSyncStatusInfo.h"
@interface MySyncStatusListner : NSObject <SUPSyncStatusListener>
@end
```

```
// The implementation file
#import "MySyncStatusListner.h"
@implementation MySyncStatusListner
- (void) onGetSyncStatusChange: (SUPSyncStatusInfo*) info
  switch (info.state)
      case SYNC STATE NONE:
         MBOLogDebug(@"SYNC STATE NONE");
          break;
      case SYNC STATE STARTING:
         MBOLogDebug(@"SYNC STATE STARTING");
         break:
      case SYNC STATE CONNECTING:
         MBOLogDebug(@"SYNC STATE CONNECTING");
          break:
      case SYNC STATE SENDING HEADER:
         MBOLogDebug (@"SYNC STATE SENDING HEADER");
          break;
      case SYNC STATE SENDING TABLE:
         MBOLogDebug (@"SYNC STATE SENDING TABLE");
         break;
      case SYNC STATE SENDING DATA:
          MBOLogDebug(@"SYNC STATE SENDING DATA");
          break;
      case SYNC STATE FINISHING UPLOAD:
         MBOLogDebug(@"SYNC STATE FINISHING UPLOAD");
      case SYNC STATE RECEIVING UPLOAD ACK:
          MBOLogDebug (@"SYNC STATE RECEIVING UPLOAD ACK");
          break;
      case SYNC STATE RECEIVING TABLE:
         MBOLogDebug (@"SYNC STATE RECEIVING TABLE");
         break;
      case SYNC STATE RECEIVING DATA:
         MBOLogDebug (@"SYNC STATE RECEIVING DATA");
      case SYNC STATE COMMITTING DOWNLOAD:
         MBOLogDebug(@"SYNC STATE COMMITTING DOWNLOAD");
          break;
      case SYNC STATE SENDING DOWNLOAD ACK:
          MBOLogDebug(@"SYNC STATE SENDING DOWNLOAD ACK");
          break;
      case SYNC STATE DISCONNECTING:
         MBOLogDebug (@"SYNC STATE DISCONNECTING");
      case SYNC STATE DONE:
         MBOLogDebug(@"SYNC STATE DONE");
          break;
      default:
         MBOLogDebug(@"DEFAULT");
          break;
```

```
}
}
@end
```

Query APIs

The Query API allows you to retrieve data from mobile business objects, to page data, and to retrieve a query result by filtering. You can also use the Query API to filter children MBOs of a parent MBO in a one to many relationship.

Retrieving Data from Mobile Business Objects

You can retrieve data from mobile business objects through a variety of queries, including object queries, arbitrary find, and through filtering query result sets.

Object Queries

To retrieve data from a local database, use one of the static Object Query methods in the MBO class.

Object Query methods are generated based on the object queries defined by the modeler in SAP Mobile WorkSpace. Object Query methods carry query names, parameters, and return types defined in SAP Mobile WorkSpace. Object Query methods return either an object, or a collection of objects that match the specified search criteria.

The following examples demonstrate how to use the Object Query methods of the Customer MBO to retrieve data.

This method retrieves all customers:

```
SUPObjectList *customers = [SampleAppCustomer findAll] ;
```

The preceding Object Query results in this generated method:

Consider an object query on a Customer MBO to find customers by last name. You can construct the query as follows:

```
Select x.* from Customer x where x.lname =:param_lname
```

where param_lname is a string parameter that specifies the last name. Assume that the query above is named **findBylname**

This generates the following Client Object API:

```
(Customer *) findBylname : (NSString *) param_lname;
```

The above API can then be used just like any other read API. For example:

```
SampleApp_Customer * thecustomer = [ SampleApp_Customer findBylname:
@"Delvin"];
```

For each object query that returns a list, additional methods are generated that allow the caller to select and sort the results. For example, consider an object query, **findByCity**, which returns a list of customers from the same city. Since the return type is a list, the following methods would be generated. The additional methods help the user with ways to specify how many results rows to skip, and how many subsequent result rows to return.

```
+ (SUPObjectList*) findByCity: (NSString*) city;
+ (SUPObjectList*) findByCity: (NSString*) city skip;
(int32_t) skip take: (int32_t) take;
```

SUPQuery and Related Classes

The following classes define arbitrary search methods and filter conditions, and provide methods for combining test criteria and dynamically querying result sets.

Class Description SUPOuerv Defines arbitrary search methods and can be composed of search conditions, object/row state filter conditions, and data ordering information. **SUPAttributeTest** Defines filter conditions for MBO attributes. SUPCompositeTest Contains a method to combine test criteria using the logical operators AND, OR, and NOT to create a compound filter. SUPQueryResultSet Provides for querying a result set for the dynamic query API. SelectItem Defines the entry of a select query. For example, "select x.attr1 from MBO x", where "X.attr1" represents one SelectItem.

Table 5. SUPQuery and Related Classes

In addition gueries support **select**, where, and **join** statements.

Arbitrary Find

Column

The arbitrary find method lets custom device applications dynamically build queries based on user input. The Query. DISTINCT property lets you exclude duplicate entries from the result set.

attribute.

Used in a subquery to reference the outer query's

The arbitrary find method also lets the user specify a desired ordering of the results and object state criteria. A SUPQuery class is included in the client object API. The SUPQuery class is the single object passed to the arbitrary search methods and consists of search conditions, object/row state filter conditions, and data ordering information.

Define these conditions by setting properties in a query:

- **SUPTestCriteria** criteria used to filter returned data.
- **SUPSortCriteria** criteria used to order returned data.
- **Skip** an integer specifying how many rows to skip. Used for paging.
- Take an integer specifying the maximum number of rows to return. Used for paging.

SUPTestCriteria can be an SUPAttributeTest or a SUPCompositeTest.

TestCriteria

You can construct a query SQL statement to query data from a local database. You can create a SUPTestCriteria object (in this example, AttributeTest) to filter results. You can also query across multiple tables (MBOs) when using the executeQuery API.

SUPAttributeTest

An ${\tt SUPAttributeTest}$ defines a filter condition using an MBO attribute, and supports multiple conditions.

- IS NULL
- NOT NULL
- EQUAL
- NOT EQUAL
- LIKE
- NOT LIKE
- LESS THAN
- LESS EQUAL
- GREATER THAN

- GREATER EQUAL
- CONTAINS
- STARTS WITH
- ENDS WITH
- NOT START WITH
- · NOT END WITH
- NOT CONTAIN
- IN
- NOT IN
- EXISTS
- NOT EXISTS

For example, the Objective-C code shown below is equivalent to this SQL query:

```
SELECT * from A where id in [1,2,3]

SUPQuery *query = [SUPQuery getInstance];
SUPAttributeTest *test = [SUPAttributeTest getInstance];
test.attribute = @"id";
SUPObjectList *v = [SUPObjectList getInstance];
[v add:@"1"];
[v add:@"2"];
[v add:@"3"];
test.testValue = v;
test.operator = SUPAttributeTest_IN;
[query where:test];
```

When using EXISTS and NOT_EXISTS, the attribute name is not required in the AttributeTest. The query can reference an attribute value via its alias in the outer scope. The Objective-C code shown below is equivalent to this SQL query:

```
SELECT a.id from AllType a where exists (select b.id from AllType b where b.id = a.id)
```

```
Sybase.Persistence.Query query = new Sybase.Persistence.Query();
query.Select("a.id");
query.From("AllType", "a");
Sybase.Persistence.AttributeTest test = new
Sybase.Persistence.AttributeTest();
Sybase.Persistence.Query existQuery = new
Sybase.Persistence.Query();
existQuery.Select("b.id");
existQuery.From("AllType", "b");
Sybase.Persistence.Column cl = new Sybase.Persistence.Column();
cl.Alias = "a";
cl.Attribute = "id";
Sybase.Persistence.AttributeTest test1 = new
Sybase.Persistence.AttributeTest();
test1.Attribute = "b.id";
test1. Value = cl;
test1.SetOperator(Sybase.Persistence.AttributeTest.EQUAL);
existQuery.Where(test1);
```

Client Object API Usage

```
test.Value = existQuery;
test.SetOperator(Sybase.Persistence.AttributeTest.EXISTS);
query.Where(test);
Sybase.Persistence.QueryResultSet qs = SMP101DB.ExecuteQuery(query);
```

SortCriteria

SortCriteria defines a SortOrder, which contains an attribute name and an order type (ASCENDING or DESCENDING).

Paging Data

On low-memory devices, retrieving up to 30,000 records from the database may cause the custom client to fail and throw an OutOfMemoryException.

Consider using the SUPQuery object to limit the result set:

```
SUPQuery *query = [SUPQuery newInstance];
[query setSkip:10];
[query setTake:2];
SUPObjectList *customerlist = [SampleAppCustomer findWithQuery:query];
```

Aggregate Functions

You can use aggregate functions in dynamic queries.

When using the select: method from SUPQuery, you can use any of these aggregate functions:

Aggregate Function	Supported Datatypes
COUNT	integer
MAX	string, binary, char, byte, short, int, long, integer, decimal, float, double, date, time, dateTime
MIN	string, binary, char, byte, short, int, long, integer, decimal, float, double, date, time, dateTime
SUM	byte, short, int, long, integer, decimal, float, double
AVG	byte, short, int, long, integer, decimal, float, double

If you use an unsupported type, a PersistenceException is thrown.

```
SUPQuery *query1 = [SUPQuery getInstance];
[query1 select:@"MAX(c.id), MIN(c.name) as minName"];
```

Grouping Results

Apply grouping criteria to your results.

To group your results according to specific attributes, use the - (SUPQuery*) groupBy: (SUPString) items method from SUPQuery. For example, to group your results by ID and name, use:

```
NSString *groupByItem = @"c.id, c.name";
SUPQuery *query1 = [SUPQuery getInstance];
//other code for query1
[query1 groupBy:groupByItem];
```

Filtering Results

Specify test criteria for group queries.

You can specify how your results are filtered by using the - (SUPQuery*) having: (SUPTestCriteria*) test method from SUPQuery method for queries using groupBy. For example, limit your AllType MBO's results to c.id attribute values that are greater than or equal to 0 using:

```
SUPQuery *query2 = [SUPQuery getInstance];
[query2 select:@"c.id, SUP(c.id)"];
[query2 from:@"AllType":@"c"];
SUPAttributeTest *ts = [SUPAttributeTest getInstance];
ts.attribute = @"c.id";
ts.testValue = @"0";
ts.operator = SUPAttributeTest_GREATER_EQUAL;
[query2 where:ts];
[query2 groupBy:@"c.id"];
SUPAttributeTest *ts2 = [SUPAttributeTest getInstance];
ts2.attribute = @"c.id";
ts2.testValue = @"0";
ts2.operator = SUPAttributeTest_GREATER_EQUAL;
[query2 having:ts2];
```

Concatenating Queries

Concatenate two queries having the same selected items.

The SUPQuery class methods for concatenating queries are:

```
    - (SUPCompositeQuery *)union:(SUPQuery *)otherQuery
    - (SUPCompositeQuery *)unionAll:(SUPQuery *)otherQuery
    - (SUPCompositeQuery *)except:(SUPQuery *)otherQuery
    - (SUPCompositeQuery *)intersect:(SUPQuery *)otherQuery
```

Note: SAP Mobile Platform adds a "LONG VARCHAR" column for all MBO tables. UltraLiteJ cannot select a "LONG VARCHAR" in a union query. Ensure that in the selected fields you do not use * in the select of a union query.

This example obtains the results from one query except for those results appearing in a second query:

```
SUPQuery *query1 = [SUPQuery getInstance];
//other code for query1

SUPQuery *query2 = [SUPQuery getInstance];
//other code for query 2

SUPQuery *query3 = (SUPQuery*) [query1 except:query2];
[SMP101SMP101DB executeQuery:query3]
```

Subqueries

Execute subqueries using clauses, selected items, and attribute test values.

You can execute subqueries using the - (SUPQuery*) from:

(SUPString) entity: (SUPString) alias method from SUPQuery. For example, the Objective-C code shown below is equivalent to this SQL query:

SELECT a.id FROM (SELECT b.id FROM AllType b) AS a WHERE a.id = 1

Use this Objective-C code:

```
SUPQuery *query1 = [SUPQuery getInstance];
[query1 select:0"b.id"];
[query1 from:0"AllType":0"b"];
SUPQuery *query2 = [SUPQuery getInstance];
[query2 select:0"a.id"];
[query2 fromQuery:query1:0"a"];
SUPAttributeTest *ts = [SUPAttributeTest getInstance];
ts.attribute = 0"a.id";
[ts setTestValue:0"1"];
[query2 where:ts];
SUPQueryResultSet *qs = [SMP101DB executeQuery:query2];
```

You can use a subquery as the selected item of a query. Use the SelectItem to set selected items directly. For example, the Objective-C code shown below is equivalent to this SQL query:

SELECT (SELECT count(1) FROM AllType c WHERE c.id >= d.id) AS cn, id FROM AllType d

Use this Objective-C code:

```
SUPQuery *selQuery = [SUPQuery getInstance];
[selQuery select:@"count(1)"];
[selQuery from:@"AllType":@"c"];
SUPAttributeTest *ttt = [SUPAttributeTest getInstance];
ttt.attribute = @"c.id";
ttt.operator = SUPAttributeTest_GREATER_EQUAL;
SUPColumn *cl = [SUPColumn getInstance];
cl.alias = @"d";
cl.attribute = @"id";
ttt.testValue = cl;
[selQuery where:ttt];
```

```
SUPObjectList *selectItems = [SUPObjectList getInstance];
SUPSelectItem *item = [SUPSelectItem getInstance];
item.query = selQuery;
item.asAlias = @"cn";
[selectItems add:item];
SUPQuery *subQuery2 = [SUPQuery getInstance];
subQuery2.selectItems = selectItems;
[subQuery2 from:@"AllType" :@"d"];
SUPQueryResultSet *qs = [SMP101DB executeQuery:subQuery2];
```


A CompositeTest combines multiple TestCriteria using the logical operators and, or, and not to create a compound filter.

Complex Example

This example shows the usage of SUPCompositeTest, SUPSortCriteria, and SUPQuery to locate all customer objects based on particular criteria.

- FirstName = John AND LastName = Doe AND (State = CA OR State = NY)
- Customer is New OR Updated
- Ordered by LastName ASC, FirstName ASC, Credit DESC
- Skip the first 10 and take 5

```
SUPQuery *props = [SUPQuery getInstance];
// Define the attribute based conditions.
// Users can pass in a string if they know the attribute name. R1
column name = attribute name.
SUPCompositeTest *innerCompTest = [SUPCompositeTest getInstance];
[innerCompTest setOperator:SUPCompositeTest OR];
[innerCompTest add: [SUPAttributeTest equal: @"state": @"CA"]];
[innerCompTest add: [SUPAttributeTest equal: @"state": @"NY"]];
SUPCompositeTest *outerCompTest = [SUPCompositeTest getInstance];
[outerCompTest setOperator:SUPCompositeTest OR];
[outerCompTest add:[SUPAttributeTest equal:@"fname":@"Jane"]];
[outerCompTest add:[SUPAttributeTest equal:@"lname":@"Doe"]];
[outerCompTest add:innerCompTest];
// Define the ordering:
SUPSortCriteria *sort = [SUPSortCriteria getInstance];
[sort add: [SUPAttributeSort ascending:@"fname"]];
[sort add: [SUPAttributeSort ascending:@"lname"]];
// Set the Query object:
props.testCriteria = (SUPTestCriteria*)outerCompTest;
props.sortCriteria = sort;
props.skip = 10;
props.take = 5;
SUPObjectList * customers2 = [SMP101Customer findWithQuery:props];
```

Note: "Order By" is not supported for a long varchar field.

SUPQueryResultSet

The SUPQueryResultSet class provides for querying a result set from the dynamic query API. SUPQueryResultSet is returned as a result of executing a query.

The following example shows how to filter a result set and get values by taking data from two mobile business objects, creating a SUPQuery, filling in the criteria for the query, and filtering the query results:

```
SUPQuery *query [SUPQuery getInstance];
[query select:@"c.fname,c.lname,s.order date,s.region"];
[query from:@"Customer":@"c"];
[query join:@"SalesOrder":@"s":@"s.cust id":@"c.id"];
SUPAttributeTest *at = [SUPAttributeTest getInstance];
at.attribute = @"lname";
at.testValue = @"Devlin";
at.operator = SUPAttributeTest EOUAL;
query.testCriteria = at;
SUPQueryResultSet *qrs = [SMP101DB executeQuery:query];
while ([qrs next])
NSLog(@"%@,",[qrs getString:1 withName:@"c.fname"]);
NSLog(@"%@,",[grs getString:2 withName:@"c.lname"]);
NSLog(@"%@,",[[qrs getDate:3 withName:@"s.order date"]
description]);
NSLog(@"%@\n",[grs getString:4 withName:@"s.region"]);
```

Retrieving Relationship Data

A relationship between two MBOs allows the parent MBO to access the associated MBO. A bidirectional relationship also allows the child MBO to access the associated parent MBO.

Assume there are two MBOs defined in SAP Mobile Server. One MBO is called Customer and contains a list of customer data records. The second MBO is called SalesOrder and contains order information. Additionally, assume there is an association between Customers and Orders on the customer ID column. The Orders application is parameterized to return order information for the customer ID.

```
SMP101Customer *onecustomer = [SMP101Customer find:101];
SUPObjectList *orders = onecustomer.salesOrders;
```

Given an order, you can access its customer information.

```
SMP101Sales_order * order = [SMP101Sales_order *find: 2001];
SMP101Customer *thiscustomer = order.customer;
```

Persistence APIs

The persistence APIs include operations and object state APIs.

Operations APIs

Mobile business object operations are performed on an MBO instance. Operations in the model that are marked as create, update, or delete (CUD) operations create non-static instances of operations in the generated client-side objects.

Any parameters in the create, update, or delete operation that are mapped to the object's attributes are handled internally by the client object API, and are not exposed. Any parameters not mapped to the object's attributes are left as parameters in the generated object API. The code examples for create, update, and delete operations are based on the **fill from attribute** being set. Different MBO settings affect the operation methods.

Note: If the SAP Mobile Platform object model defines one instance of a create operation and one instance of an update operation, and all operation parameters are mapped to the object's attributes, then a Save method can be automatically generated which, when called internally, determines whether to insert or update data to the local client-side database. In other situations, where there are multiple instances of create or update operations, methods such as Save cannot be automatically generated.

Create Operation

The create operation allows the client to create a new record in the local database. To execute a create operation on an MBO, create a new MBO instance, and set the MBO attributes, then call the save() or create() operation. To propagate the changes to the server, call submitPending.

(void)create

Example 1: Supports create operations on parent entities. The sequence of calls is:

```
SMP101Customer *newcustomer = [[SMP101Customer alloc] init];
newcustomer.fname = @"John";
... //Set the required fields for the customer
[newcustomer create];
[newcustomer submitPending];
[SMP101SMP101DB synchronize];
```

Example 2: Supports create operations on child entities.

```
SMP101Sales_Order *order = [[SMP101Sales_Order alloc] init];
[order autorelease];
//Set the other required fields for the order
order.region = @"Eastern";
order.xxx = yyy;
```

```
SMP101Customer *customer = [SMP101Customer find:1008];
[order setCustomer:customer];
[order create];
[order.customer refresh]; //refresh the parent
[order.customer submitPending]; //call submitPending on the parent.
[SMP101SMP101DB synchronize];
```

Update Operation

The update operation updates a record in the local database on the device. To execute update operations on an MBO, get an instance of the MBO, set the MBO attributes, then call either the save () or update () operation. To propagate the changes to the server, call submitPending.

In the following examples, the Customer and SalesOrder MBOs have a parent-child relationship.

Example 1: Supports update operations to parent entities. The sequence of calls is as follows:

```
SMP101Customer *customer = [ SMP101Customer find: 32]
//find by the unique id
customer.city = @"Dublin"; //update any field to a new value
[customer update];
[customer submitPending];
[SMP101SMP101DB synchronize];
```

Example 2: Supports update operations to child entities. The sequence of calls is:

```
SMP101Sales_Order* order = [SMP101Sales_Order find: 1220];
order.region = @"SA"; //update any field
[order update]; //call update on the child record
[order refresh];
[order.customer submitPending]; //call submitPending on the parent
[SMP101SMP101DB synchronize];
```

Example 3: Calling save () on a parent also saves any modifications made to its children:

```
SMP101Customer *customer = [ SMP101Customer find: 32]
SUPObjectList* orderlist = customer.orders;
SMP101Sales_Order* order = [orderlist item:0];
order.sales_rep = @"Ram";
customer.state = @"MA";
[customer save];
[customer submitPending];
[SMP101SMP101DB synchronize];
```

Delete Operation

The delete operation allows the client to delete a new record in the local database. To execute delete operations on an MBO, get an instance of the MBO, set the MBO attributes, then call the delete operation. To propagate the changes to the server, call submitPending.

(void)delete

The following examples show how to perform deletes to parent entities and child entities.

Example 1: Supports delete operations to parent entities. The sequence of calls is:

```
SMP101Customer *customer = [ SMP101Customer find: 32]
[Customer delete];
[Customer submitPending];
[SMP101SMP101DB synchronize];
```

Example 2: Supports delete operations child entities. The sequence of calls is:

```
SMP101Sales_order *order = [SMP101Sales_order find: 32]
[order delete];
[order.customer submitPending]; //Call submitPending on the parent.
[SMP101SMP101DB synchronize];
```

Save Operation

The save operation saves a record to the local database. In the case of an existing record, a save operation calls the update operation. If a record does not exist, the save operation creates a new record.

(void)save

```
SMP101Customer *customer = [ SMP101Customer find: 32]
//Change some sttribute of the customer record
customer.fname= @"New Name";
[customer save];
[SMP101SMP101DB synchronize];
```

Other Operation

Operations other than create, update, or delete operations are called "other" operations. An Other operation class is generated for each operation in the MBO that is not a create, update, or delete operation.

This is an example of an "other" operation:

```
SMP101CustomerChangeLastNameOperation *op =
[SMP101CustomerChangeLastNameOperation getInstance];
op.old_lname = @"Smith";
op.new_lname = @"Jones";
[op save];

[op submitPending];
[SMP101SMP101DB synchronize];
```

Pending Operation

You can manage the pending state.

• **(void) submitPending** – Submits the operation so that it can be replayed on the SAP Mobile Server. A request is sent to the SAP Mobile Server during a synchronization.

```
[customer submitPending];
```

• **(void) cancel Pending** – Cancels a pending record. A pending record is one that has been updated in the local client database, but not yet sent to the SAP Mobile Server.

```
[customer cancelPending];
```

(void) cancelPending cancels pending changes for a particular instance or instances (via (void) cancelPendingObjects from the database class). However, if (void) submitPending has already been invoked, only the pending state and original state (for update) are removed. The operation replay record generated by the (void) submitPending remains. This means that the operation replay record is uploaded to SAP Mobile Server upon synchronization. If the EIS honors the operation replay, the changes are propagated back to the device during the download. The Object API framework forgoes operation replay completion processing when it finds that there are no pending/original states for the instance. Hence, (void) cancelPending is not the inverse operation of submitPending.

• + (void) submitPendingOperations - Submits all data for all pending records to the SAP Mobile Server. This method internally invokes the submitPending method.

[Customer submitPendingOperations];

• + (void) submitPendingOperations:

(NSString*) synchronizationGroup — Submits all data for pending records from MBOs in this synchronization group to the SAP Mobile Server. This method internally invokes the submitPending method.

[SMP101SMP101DB submitPendingOperations:@"default"];

• **(void) cancelPendingOperations** – Cancels the pending operations for an entire entity. This method internally invokes the cancelPending method.

```
[Customer cancelPendingOperations];
```

Note: Use the submitPendingOperations and cancelPendingOperations methods only when there are multiple pending entities on the same MBO type. Otherwise, use the MBO instance's submitPending or cancelPending methods, which are more efficient if the MBO instance is already available in memory.

```
SMP101Customer *customer = [SMP101Customer find:101];
//Make some changes to the customer record.
//Save the changes

//If the user wishes to cancel the changes, a call to cancel pending will revert to the old values.

[customer cancelPending];

// The user can submit the changes to the server as follows:
[customer submitPending];
```

Date/Time

Classes that support managing date/time objects.

- **SUPDateValue.h** manages an object of datatype Date.
- **SUPTimeValue.h** manages an object of datatype Time.

- **SUPDateTimeValue.h** manages an object of datatype DateTime.
- SUPDateList.h manages a list of Date objects (the objects cannot be null).
- SUPTimeList.h manages a list of Time objects (the objects cannot be null).
- SUPDateTimeList.h manages a list of DateTime objects (the objects cannot be null).
- SUPNullableDateList.h manages a list of Date objects (the objects can be null).
- **SUPNullableTimeList.h** manages a list of Time objects (the objects can be null).
- **SUPNullableDateTimeList.h** manages a list of DateTime objects (the objects can be null).

Example 1: To get a Date value from a query result set:

Example 2: A method takes Date as a parameter:

```
-(void) setModifiedOrderDate: (SUPDateValue*) thedate;
SUPDateValue *thedatevalue = [SUPDateValue newInstance];
[thedatevalue setValue: [NSDate date]];
[customer setModifiedOrderDate:thedatevalue];
```

Object State APIs

The object state APIs provide methods for returning information about the state of an entity in an application.

Entity State Management

The object state APIs provide methods for returning information about entities in the database.

All entities that support pending state have the following attributes:

Name	Туре	Description
isNew	BOOL	Returns true if this entity is new, but has not yet been created in the client database.

Name	Туре	Description
isCreated	BOOL	Returns true if this entity has been newly created in the client database, and one of the following is true:
		 The entity has not yet been submitted to the server with a replay request. The entity has been submitted to the server, but the server has not finished processing the request. The server rejected the replay request (replay-Failure message received).
isDirty	BOOL	Returns true if this entity has been changed in memory, but the change has not yet been saved to the client database.
isDeleted	BOOL	Returns true if this entity was loaded from the database and subsequently deleted.
isPending	BOOL	Checks if the object's pending flag is turned on or not, that is, has pending change or not. Returns true if there is a pending change, returns false if there is no pending change.
isUpdated	BOOL	Returns true if this entity has been updated or changed in the database, and one of the following is true:
		 The entity has not yet been submitted to the server with a replay request. The entity has been submitted to the server, but the server has not finished processing the request. The server rejected the replay request (replay-Failure message received).
pending	BOOL	Returns true for any row that represents a pending create, update, or delete operation, or a row that has cascading children with a pending operation.
pendingChange	char	If pending is true, this attribute's value is 'C' (create), 'U' (update), 'D' (delete), or 'P' (to indicate that this MBO is a parent in a cascading relationship for one or more pending child objects, but this MBO itself has no pending create, update or delete operations). If pending is false, this attribute's value is 'N'.

Name	Туре	Description
replayCounter	long	Returns a long value that is updated each time a row is created or modified by the client. This value is derived from the time in seconds since an epoch, and increases each time a row is changed. int64_t result = [customer replay-Counter];
replayPending	long	Returns a long value. When a pending row is submitted to the server, the value of replayCounter is copied to replayPending. This allows the client code to detect if a row has been changed since it was submitted to the server (that is, if the value of replayCounter is greater than replayPending). int64_t result = [customer replayPending];
replayFailure	long	Returns a long value. When the server responds with a replayFailure message for a row that was submitted to the server, the value of replay—Counter is copied to replayFailure, and replayPending is set to 0. int64_t result = [customer replay—Failure];

Entity State Example

Shows how the values of the entities that support pending state change at different stages during the MBO update process. The values that change between different states appear in bold.

Note these entity behaviors:

- The isDirty flag is set if the entity changes in memory but is not yet written to the database. Once you save the MBO, this flag clears.
- The replayCounter value that gets sent to the SAP Mobile Server is the value in the database before you call submitPending. After a successful replay, that value is imported from the SAP Mobile Server.
- The last two entries in the table are two possible results from the operation; only one of these results can occur for a replay request.

Description	Flags/Values
After reading from the database, before any changes	isNew=false
are made.	isCreated=false
	isDirty=false
	isDeleted=false
	isUpdated=false
	pending=false
	pendingChange='N'
	replayCounter=33422977
	replayPending=0
	replayFailure=0
One or more attributes are changed, but changes not	isNew=false
saved.	isCreated=false
	isDirty= true
	isDeleted=false
	isUpdated=false
	pending=false
	pendingChange='N'
	replayCounter=33422977
	replayPending=0
	replayFailure=0

Description	Flags/Values
After [entity save] or [entity up-	isNew=false
date] is called.	isCreated=false
	isDirty= false
	isDeleted=false
	isUpdated= true
	pending= true
	pendingChange='U'
	replayCounter=33424979
	replayPending=0
	replayFailure=0
After [entity submitPending] is called	isNew=false
to submit the MBO to the server.	isCreated=false
	isDirty=false
	isDeleted=false
	isUpdated=true
	pending=true
	pendingChange='U'
	replayCounter=33424981
	replayPending=33424981
	replayFailure=0

Description	Flags/Values
Possible result: the SAP Mobile Server accepts the update, sends an import and a replayResult for the entity, and then refreshes the entity from the database.	isNew=false
	isCreated=false
	isDirty=false
	isDeleted=false
	isUpdated= false
	pending= false
	pendingChange='N'
	replayCounter=33422977
	replayPending=0
	replayFailure=0
Possible result: The SAP Mobile Server rejects the	isNew=false
update, sends a replayFailure for the entity, and refreshes the entity from the database	isCreated=false
and refreshes the entity from the database	isDirty=false
	isDeleted=false
	isUpdated=true
	pending=true
	pendingChange='U'
	replayCounter=33424981
	replayPending=0
	replayFailure=33424981

Refresh Operation

The refresh operation of an MBO allows you to refresh the MBO state from the client database.

For example:

```
Customer *cust = [Customer findById:101];
cust.fname = @"newName";
[cust refresh]; // newName is discarded
```

Generated Package Database APIs

The generated package database APIs include methods that exist in each generated package database.

Client Database APIs

The generated package database class provides methods for managing the client database.

```
+ (void) createDatabase;
+ (void) deleteDatabase;
+ (BOOL) databaseExists;
```

Typically, createDatabase does not need to be called since it is called internally when necessary. An application may use deleteDatabase when uninstalling the application.

Use the transaction API to group several transactions together for better performance.

```
SMP101Customer *customer1 = [SMP101Customer findByPrimaryKey:101];
SMP101Customer *customer2 = [SMP101Customer findByPrimaryKey:102];

// Use one transaction for better performance with multiple changes
SUPLocalTransaction *tx = [SMP101SMP101DB beginTransaction];
[customer1 save];
[customer2 save];
// Commit the transaction
[tx commit];
// Submit the changes to the server
[customer1 submitPending];
[customer2 submitPending];
```

Large Attribute APIs

Use large string and binary attributes.

You can import large messages containing binary objects (BLOBs) to the client, send new or changed large objects to the server, and efficiently handle large attributes on the client.

The large attribute APIs allow clients to import large messages from the server or send a replay message without using excessive memory and possibly throwing exceptions. Clients can also access or modify a large attribute without reading the entire attribute into memory. In addition, clients can execute queries without having large attribute valuies automatically filled in the returned MBO lists or result sets.

SUPBigBinary

An object that allows access to a persistent binary value that may be too large to fit in available memory. A streaming API is provided to allow the value to be accessed in chunks.

close

Closes the value stream.

Closes the value stream. Any buffered writes are automatically flushed. Throws a SUPStreamNotOpenException if the stream is not open.

Syntax

```
- (void)close;
```

Examples

Close the value stream – Writes a binary book cover image and closes the image file. In
the following example, book is the instance of an MBO and cover is a BigBinary
attribute

```
SUPBigBinary *image = book.cover;
NSData * data;
[image openForWrite:[data length]];
[image write:data];
[image close];
```

copyFromFile

Overwrites this SUPBigBinary object with data from the specified file.

Any previous contents of the file will be discarded. Throws an SUPObjectNotSavedException if this SUPBigBinary object is an attribute of an entity that has not yet been created in the database. Throws a SUPStreamNotClosedException if the object is not closed.

Syntax

```
- (void)copyFromFile :(SUPString)filepath;
```

Parameters

• **filepath** – The file containing the data to be copied.

copyToFile

Overwrites the specified file with the contents of this SUPBigBinary object.

Any previous contents of the file are discarded. Throws an SUPObjectNotSavedException if this SUPBigBinary object is an attribute of an entity that has not yet been created in the database. Throws a SUPStreamNotClosedException if the object is not closed.

Syntax

```
- (void)copyToFile :(SUPString)filepath;
```

Parameters

• **filepath** – The file to be overwritten.

flush

Flushes any buffered writes.

Flushes any buffered writes to the database. Throws a ${\tt SUPStreamNotOpenException}$ if the stream is not open.

Syntax

- (void) flush;

openForRead

Opens the value stream for reading.

Has no effect if the stream was already open for reading. If the stream was already open for writing, it is flushed before being reopened for reading. Throws an SUPObjectNotSavedException if this SUPBigBinary object is an attribute of an entity that has not yet been created in the database. Throws an SUPObjectNotFoundException if this object is null.

Syntax

(void) openForRead;

Examples

• **Open for reading** – Opens a binary book image for reading.

```
SUPBigBinary *image = book.cover;
[image openForRead];
```

openForWrite

Opens the value stream for writing.

Any previous contents of the value will be discarded. Throws an SUPObjectNotSavedException if this SUPBigBinary object is an attribute of an entity that has not yet been created in the database.

Syntax

```
    (void) openForWrite : (SUPLong) newLength;
```

Parameters

• **newLength** – The new value length in bytes. Some platforms may allow this parameter to be specified as 0, with the actual length to be determined later, depending on the amount of data written to the stream. Other platforms require the total amount of data written to the stream to match the specified value.

Examples

• **Open for writing** – Opens a binary book image for writing.

```
SUPBigBinary *image = book.cover;
[image openForWrite:[data length]];
```

read

Reads a chunk of data from the stream.

Reads and returns the specified number of bytes, or fewer if the end of stream is reached. Throws a SUPStreamNotOpenException if the stream is not open for reading.

Syntax

```
- (SUPNullableBinary) read : (SUPLong) length;
```

Parameters

• **length** – The maximum number of bytes to be read into the chunk.

Returns

read returns a chunk of binary data read from the stream, or a null value if the end of the stream has been reached.

Examples

• **Read** – Reads in a binary book image.

```
SUPSampleBook *book = [SUPSampleBook findByPrimaryKey:bookID];
SUPBigBinary *image = book.cover;
int bufferLength2 = 1024;
[image openForRead];
NSData *data = [image read:bufferLength];
```

readByte

Reads a single byte from the stream.

Throws a SUPStreamNotOpenException if the stream is not open for reading.

Syntax

```
- (SUPInt) readByte;
```

Returns

readByte returns a byte of data read from the stream, or -1 if the end of the stream has been reached.

seek

Changes the stream position.

Throws a SUPStreamNotOpenException if the stream is not open for reading.

Syntax

```
(void) seek : (SUPLong) newPosition;
```

Parameters

 newPosition – The new stream position in bytes. Zero represents the beginning of the value stream.

write

Writes a chunk of data to the stream.

Writes data to the stream, beginning at the current position. The stream may be buffered, so use flush or close to be certain that any buffered changes have been applied. Throws a SUPStreamNotOpenException if the stream is not open for writing. Throws a SUPWriteAppendOnlyException if the platform only supports appending to the end of a value and the current stream position precedes the end of the value. Throws a SUPWriteOverLengthException if the platform requires the length to be predetermined before writing and this write would exceed the predetermined length.

Syntax

```
- (void)write :(SUPBinary)data;
```

Parameters

• data – The data chunk to be written to the stream.

Examples

Write data – Opens a binary book image for writing.

```
SUPSampleBook *book = [SUPSampleBook findByPrimaryKey:bookID];
SUPBigBinary *image = book.cover;
NSData * data;
[image openForWrite:[data length]];
[image write:data];
```

writeByte

Writes a single byte to the stream.

Writes a byte of data to the stream, beginning at the current position. The stream may be buffered, so use flush or close to be certain that any buffered changes have been applied. Throws a SUPStreamNotOpenException if the stream is not open for writing. Throws a SUPWriteAppendOnlyException if the platform only supports appending to the end of a value and the current stream position precedes the end of the value. Throws a SUPWriteOverLengthException if the platform requires the length to be predetermined before writing and this write would exceed the predetermined length.

Syntax

```
- (void)writeByte : (SUPByte)data;
```

Parameters

• **data** – The byte value to be written to the stream.

SUPBigString

An object that allows access to a persistent string value that might be too large to fit in available memory. A streaming API is provided to allow the value to be accessed in chunks.

close

Closes the value stream.

Closes the value stream. Any buffered writes are automatically flushed. Throws a SUPStreamNotOpenException if the stream is not open.

Syntax

```
- (void) close;
```

Examples

• Close the value stream – Writes to the biography file, and closes the file.

```
SUPSampleAuthor * author = [SUPSampleAuthor
findByPrimaryKey:authorID];

SUPBigString *text = author.biography;

NSString *stringToWrite = @"something";

[text openForWrite:[stringToWrite length]];
[text write:stringToWrite];
[text close];
```

copyFromFile

Overwrites this SUPBigString object with data from the specified file.

Any previous contents of the value will be discarded. Throws an SUPObjectNotSavedException if this SUPBigString object is an attribute of an entity that has not yet been created in the database. Throws a SUPStreamNotClosedException if the object is not closed.

Syntax

```
- (void) copyFromFile : (SUPString) filepath;
```

Parameters

• **filepath** – The file containing the data to be copied.

copyToFile

Overwrites the specified file with the contents of this SUPBigString object.

Any previous contents of the file are discarded. Throws an SUPObjectNotSavedException if this SUPBigString object is an attribute of an entity that has not yet been created in the database. Throws a SUPStreamNotClosedException if the object is not closed.

Syntax

```
- (void) copyToFile : (SUPString) filepath;
```

Parameters

• **filepath** – The file to be overwritten.

flush

Flushes any buffered writes.

Flushes any buffered writes to the database. Throws a SUPStreamNotOpenException if the stream is not open.

Syntax

```
- (void) flush;
```

openForRead

Opens the value stream for reading.

Has no effect if the stream was already open for reading. If the stream was already open for writing, it is flushed before being reopened for reading. Throws an SUPObjectNotSavedException if this SUPBigString object is an attribute of an entity that has not yet been created in the database.

Syntax

(void) openForRead;

Examples

• Open for reading – Opens the biography file for reading.

```
SUPSampleAuthor * author = [SUPSampleAuthor
findByPrimaryKey:authorID];
```

```
SUPBigString *text = author.biography;
[text openForRead];
```

openForWrite

Opens the value stream for writing.

Any previous contents of the value will be discarded. Throws an SUPObjectNotSavedException if this SUPBigString object is an attribute of an entity that has not yet been created in the database.

Syntax

```
- (void) openForWrite : (SUPLong) newLength;
```

Parameters

• **newLength** – The new value length in bytes. Some platforms may allow this parameter to be specified as 0, with the actual length to be determined later, depending on the amount of data written to the stream. Other platforms require the total amount of data written to the stream to match the specified value.

Examples

• **Open for writing** – Opens the biography file for writing.

```
SUPSampleAuthor * author = [SUPSampleAuthor
findByPrimaryKey:authorID];

SUPBigString *text = author.biography;

NSString *stringToWrite = @"something";

[text openForWrite:[stringToWrite length]];
```

read

Reads a chunk of data from the stream.

Reads and returns the specified number of characters, or fewer if the end of stream is reached. Throws a SUPStreamNotOpenException if the stream is not open for reading.

Syntax

```
- (SUPNullableBinary)read : (SUPLong)length;
```

Parameters

• **length** – The maximum number of characters to be read into the chunk.

Returns

read returns a chunk of string data read from the stream, or a null value if the end of the stream has been reached.

Examples

• **Read** – Reads in the biography file.

```
int64_t bufferLength = 1024;
NSString *something = [text read:bufferLength]; // null if EOF
while (something != nil)
{
   something = [text read:bufferLength];
}
```

readChar

Reads a single character from the stream.

Throws a SUPStreamNotOpenException if the stream is not open for reading.

Syntax

```
- (SUPInt) readChar;
```

Returns

readChar returns a single character read from the stream, or -1 if the end of the stream has been reached.

seek

Changes the stream position.

Throws a SUPStreamNotOpenException if the stream is not open for reading.

Syntax

```
- (void) seek : (SUPLong) newPosition;
```

Parameters

• **newPosition** – The new stream position in characters. Zero represents the beginning of the value stream.

write

Writes a chunk of data to the stream.

Writes data to the stream, beginning at the current position. The stream may be buffered, so use flush or close to be certain that any buffered changes have been applied. Throws a SUPStreamNotOpenException if the stream is not open for writing. Throws a

Client Object API Usage

SUPWriteAppendOnlyException if the platform only supports appending to the end of a value and the current stream position precedes the end of the value. Throws a SUPWriteOverLengthException if the platform requires the length to be predetermined before writing and this write would exceed the predetermined length.

Syntax

```
- (void)write :(SUPString)data;
```

Parameters

• data – The data chunk to be written to the stream.

Examples

• Write data – Writes to the biography file, and closes the file.

```
SUPSampleAuthor * author = [SUPSampleAuthor
findByPrimaryKey:authorID];

SUPBigString *text = author.biography;

NSString *stringToWrite = @"something";

[text openForWrite:[stringToWrite length]];
[text write:stringToWrite];
```

writeChar

Writes a single character to the stream.

Writes a character of data to the stream, beginning at the current position. The stream may be buffered, so use flush or close to be certain that any buffered changes have been applied. Throws a SUPStreamNotOpenException if the stream is not open for writing. Throws a SUPWriteAppendOnlyException if the platform only supports appending to the end of a value and the current stream position precedes the end of the value. Throws a SUPWriteOverLengthException if the platform requires the length to be predetermined before writing and this write would exceed the predetermined length.

Syntax

```
- (void)writeChar :(SUPChar)data;
```

Parameters

• **data** – The character value to be written to the stream.

MetaData API

You can access metadata for database, classes, entities, attributes, operations, and parameters using the MetaData API.

MetaData API

Some applications or frameworks can operate against MBOs generically by invoking MBO operations without prior knowledge of MBO classes. This can be achieved by using the MetaData API.

These APIs allow retrieving the metadata of packages, MBOs, attributes, operations, and parameters during runtime.

You can generate metadata classes using the -md code generation option. You can also generate metadata classes by selecting the option **Generate metadata classes** in the code generation wizard in the mobile application project.

SUPDatabaseMetaDataRBS

The SUPDatabaseMetaDataRBS class holds package-level metadata. You can use it to retrieve information about all the classes and entities for which metadata has been generated.

Any entity for which "allow dynamic queries" is enabled generates attribute metadata. Depending on the options selected in the Eclipse IDE, metadata for attributes and operations may be generated for all classes and entities.

SUPClassMetaDataRBS

The SUPClassMetaDataRBS class holds metadata for the MBO, including attributes and operations.

EntityMetaData

The EntityMetaData class holds metadata for the MBO, including attributes and operations.

SUPAttributeMetaData

The SUPAttributeMetaData class holds metadata for an attribute such as attribute name, column name, type, and maxlength.

Exceptions

Reviewing exceptions allows you to identify where an error has occurred during application execution. These sections do not contain error codes contained in the exception classes. See the Developer Guide: Device Client Error Reference for detailed information about SAP Mobile Platform error codes.

Exception Handling

An exception represents an unexpected condition hindering a method from completion. In some cases, the exception is transient and you can retry it at a later time. In most cases, you must resolve the underlying cause of the exception to allow the API to complete successfully. In rare cases, the exception encountered corrupts the application state and may require you to terminate and restart the application.

To use the localization features in exception handling:

- Use the SUPExceptionMessageServiceImpl to import resource bundles to your project.
 The default implementation provides error message strings for English. You can optionally create more localized files for other languages.
- Register an exception message service implementation through the SUPServiceReqistry.

Base Exceptions

A base exception class is defined as the super class for all external exceptions. Specific exceptions always inherit from the base exception. To enable you, the Object API developer, to write a standard exception handler, all external exceptions have an error code and a single error message. Furthermore, the exception may contain another exception as the cause. See the Developer Guide: Device Client Error Reference for detailed information.

```
@class SUPBaseException
@abstract This class contains information about the exception,
error code and error messages.
@discussion
@interface SUPBaseException : NSException {
   NSArray* _arguments;
int _errorCode;
NSException* _cause;
// the error code property
@property(readwrite, assign, nonatomic) int errorCode;
// the root exception
@property(readwrite, retain, nonatomic) NSException* cause;
// localized error message
@property(readwrite, copy, nonatomic) NSString* message;
/*!
@method messageWithLocale
@abstract get the error message using the locale specified
@result the localized message
@discussion
- (NSString *) messageWithLocale: (NSString *) locale;
@end;
```

You can use the message and messageWithLocale (String locale) methods to retrieve an error message for a specified locale. message is the NSString* message property and messageWithLocale is the messageWithLocale:NSString* locale method.

```
@try
{
/// ...
}
@catch (SUPBaseException *e)
{
NSString* errorMessage = e.message;
```

```
NSString* errorMessageSpanish = [e messageWithLocale:@"es"];
}
```

See the *Object API Applications* section of the *Developer Guide: Device Client Error Reference* for information about possible error codes and the corresponding error messages.

Exception Message Service

You can implement an exception message service for resolving localized messages using error codes. The exception class uses the exception message service to load resource bundles and look up error messages based on an error code. You can use a default message provider, SUPExceptionMessageServiceImpl, or create a custom provider by implementing your own SUPExceptionMessageService.

To resolve localized messages, implement the SUPExceptionMessageService protocol.

```
/*!
@protocol
@abstract SUPExceptionMessageService protocol
@discussion SUPExceptionMessageServiceImpl is the default
implementation provided for SUPExceptionMessageSerivce protocol can
be registered with the SUPServiceRegistry.
@protocol SUPExceptionMessageService
/ * 1
@method
@abstract Get the message of this error code.
@param errorCode The error code for the message.
@result the error message
@discussion
-(NSString*) messageWithErrorCode: (int) errorCode;
/*!
@abstract Get the localized message of this error code for a
specific locale
@param errorCode The error code for mthe message
@param locale locale identifier
@result the localized message
@discussion The locale identifier is the language-specific project
(.lproj) directory name for loading resource bunlde,
ErrorMessages.strings. It could be also the value passed to
NSString's initWithFormat method for string formatting the
arguments.
The locale value can be in one of the following two forms:
- "language": language specific value. eg: @"en"
- "language" "region": language and region specific value. eg:
@"en US"
If the resource bundle is not found in the "language" "region" form,
```

The "language" part of the value is used to load the resource bundle. If a resource bundle is not found, go by [[NSBundle mainBundle] preferredLocalizations]. If it is still not found, defaults to "en". If the value is not one of the locale identifiers available in [NSLocale availableLocaleIdentifiers], the locale in [[NSLocale currentLocale] localeIdentifier] is used in string formatting the arguments.

*/
-(NSString*) messageWithErrorCode: (int) errorCode locale: (NSString*) locale;

The exception class uses the exception message service to load resource bundles and look up error messages based on an error code.

```
id<SUPExceptionMessageService> provider = [[SUPServiceRegistry
sharedInstance] getService:@protocol(SUPExceptionMessageService)];
NSString *message = [provider messageWithErrorCode:errorCode];
```

You can use a default message provider, SUPExceptionMessageServiceImpl. The default implementation provides a superr.bundle which contains the default English resource to look up an error message using an error code.

The SUPExceptionMessageServiceImpl loads resource bundles from the superr.bundle. You must import the superr.bundle in SMP_HOME/ObjectAPI/iOS/resources/superr.bundle to the project.

You can add support for other languages by adding new error message key-value pairs to a file named ErrorMessages.strings inside a folder named using a -language code>.lproj pattern. The superr.bundle structure is:

```
superr.bundle
  en.lproj
    ErrorMessages.strings
  <language code>.lproj
    ErrorMessages.strings
  <language code>.lproj
    ErrorMessages.strings
```

For example, to add support for Spanish:

@end

- 1. Create a new folder, for example es.lprj, inside superr.bundle.
- 2. Create a new ErrorMessage.strings text file inside the es.lprj folder.
- **3.** Define new localized error messages for the same set of error message keys found using the format "<error code>" = "<error message in Spanish>".
- **4.** Rebuild the application with the new superr. bundle file.

You can create a custom provider by implementing your own SUPExceptionMessageService.

```
@interface CustomMessageService : NSObject
<SUPExceptionMessageService>
```

```
@end
@implementation CustomMessageService

-(NSString*) messageWithErrorCode: (int) errorCode
{
return @"my own way of retrieving the message";
}
-(NSString*) messageWithErrorCode: (int) errorCode locale:
(NSString*) localName
{
return @"my own way of retrieving the localized message";
}
@end
// register our custom message provider
CustomMessageService* myProvider = [[CustomMessageService alloc] init];
[[SUPServiceRegistry sharedInstance]
registerService:@protocol(SUPExceptionMessageService)
withImplementation:myProvider];
```

See *Service Registry* for sample code on using the default exception message provider and how to register the default provider with the service registry.

Service Registry

The service registry holds implementation instances for various services used by the entity framework and applications. To allow you to use the exception message service, you must register the exception message service implementation represented by the SUPExceptionMessageService protocol with the service registry.

You can register objects that implement the SUPExceptionMessageProvider protocol using the ServiceRegister interface's registerService and unregisterService methods.

```
- (id)registerService: (Protocol *)protocol withImplementation: (id)service;- (id)unregisterService: (Protocol *) protocol;
```

For example:

```
// register our default message service
id <SUPExceptionMessageService> service =
[SUPExceptionMessageServiceImpl exceptionMessageServiceImpl];

SUPServiceRegistry* sr = [SUPServiceRegistry sharedInstance];
[sr registerService:@protocol(SUPExceptionMessageService)
withImplementation:service];
```

Example Code for Handling Exceptions

An example of registering your interface.

```
defaultMessageProvider = [SUPExceptionMessageDefaultProvider
getInstance];

// register a custom message provider
SUPServiceRegistry* sr = [SUPServiceRegistry getInstance];
[sr registerService:@protocol(SUPExceptionMessageProvider)
withImplementation:defaultMessageProvider];
```

You can retrieve error codes using the errorCode property of SUPBaseException:

```
@try
{
    // ...
}
@catch (SUPBaseException *e)
{
    if(e.errorCode != ERR_APP_NOT_REGISTERED)
    {
    }
}
```

To retrieve the error message using the preferred language for the device:

```
@try
{
    // ...
}
@catch (SUPBaseException *e)
{
    NSString* errorMessage = e.message;
}
```

To retrieve the error message for a specific language:

```
@try
{
    // ...
}
@catch (SUPBaseException *e)
{
    NSString* errorMessageSpanish = [e messageWithLocale:@"es"];
}
```

You can catch exceptions using the built-in support in Objective-C. The object can be either a SUPBaseException object or a subclass of the SUPBaseException object such as the SUPPersistenceException object.

```
@try
{
    [self CallMethodThatMightThrowException];
}
@catch (SUPPersistenceException *e)
{
```

```
// this will catch all SUPPersistenceException type objects
}
@catch (SUPBaseException *e)
{
   // this will catch all other SUPBaseExcepiton type objects
}
@finally
{
   // finally block...
}
```

Server-Side Exceptions

A server-side exception occurs when a client tries to update or create a record and the SAP Mobile Server throws an exception.

A server-side exception results in a stack trace in the server log, and a log record (LogRecordImpl) imported to the client with information on the problem. The client receives both the log record and a replayFailed message.

Client-Side Exceptions

Device applications are responsible for catching and handling exceptions thrown by the client object API. The HeaderDoc for the client object API lists the possible exceptions for the client.

Note: See Callback Handlers.

Exception Classes

The Client Object API supports exception classes for queries and for the messaging client.

- **SUPSynchronizeException** thrown when an exception occurs during synchronization.
- **SUPPersistenceException** thrown when trying to access the local database.
- **SUPObjectNotFoundException** thrown when trying to load an MBO that is not inside the local database.
- **SUPNoSuchOperationException** thrown when trying to call a method (using the Object Manager API) but the method is not defined for the MBO.
- **SUPNoSuchAttributeException** thrown when trying to access an attribute (using the Object Manager API) but the attribute is not defined for the MBO.
- **SUPApplicationRuntimeException** thrown when a call to start the connection, register the application, or unregister the application cannot be completed due to an error.
- **SUPConnectionPropertyException** thrown when a call to start the connection, register the application, or unregister the application cannot be completed due to an error in a connection property value or application identifier.

Query Exception Classes

Exceptions thrown by SUPStatementBuilder when building an SUPQuery, or by SUPQueryResultSet during processing of the results. These exceptions occur if the

query called for an entity or attribute that does not exist, or tried to access results with the wrong datatype.

- SUPAbstractClassException.h thrown when the query specifies an abstract class.
- **SUPInvalidDataTypeException.h** thrown when the query tries to access results with an invalid datatype.
- **SUPNoSuchAttributeException.h** thrown when the query calls for an attribute that does not exist.
- SUPNoSuchClassException.h thrown when the query calls for a class that does not
 exist.
- SUPNoSuchParameterException.h thrown when the query calls for a parameter that
 does not exist.
- SUPNoSuchOperationException.h thrown when the query calls for an operation that
 does not exist.
- **SUPWrongDataTypeException.h** thrown when the query tries to access results with an incorrect datatype definition.

Messaging Client API Exception Classes

Exceptions in the messaging client (clientrt) library.

- **SUPObjectNotFoundException.h** thrown by the load: method for entities if the passed-in primary key is not found in the entity table.
- **SUPPersistenceException.h** may be thrown by methods that access the database. This may occur when application codes attempts to:
 - Insert a new row in an MBO table using a duplicate key value.
 - Execute a dynamic query that selects for attribute (column) names that do not exist in an MBO.

Attribute Datatype Conversion

When a non-nullable attribute's datatype is converted to a non-primitive datatype (such as class NSNumber, NSDate, and so on), you must verify that the the corresponding property for the MBO instance is assigned a non-nil value, otherwise the application may receive a runtime exception when creating a new MBO instance.

A typical scenario is when an attribute exists in ASE's identity column with a numeric datatype. For example, for a non-nullable attribute with a decimal datatype, the corresponding datatype in the generated Objective-C MBO code is NSNumber. When creating a new MBO instance, ensure that you assign this property a non-nil value.

Error Codes

Codes for errors occurring during application execution.

HTTP Error Codes

The SAP Mobile Server examines the EIS code received in a server response message and maps it to a logical HTTP error code, if a corresponding error code exists. If no corresponding

code exists, the 500 code is assigned to signify either a SAP Mobile Platform internal error, or an unrecognized EIS error.

The EIS code and HTTP error code values are stored in log records (LogRecord.EisCode, and LogRecord.Code, respectively).

These tables list recoverable and unrecoverable error codes. All error codes that are not explicitly considered recoverable are considered unrecoverable.

Table 6. Recoverable Error Codes

Error Code	Probable Cause	
409	Backend EIS is deadlocked.	
503	Backend EIS is down, or the connection is terminated.	

Table 7. Unrecoverable Error Codes

Error Code	Probable Cause	Manual Recovery Action
401	Backend EIS credentials wrong.	Change the connection information, or backend user password.
403	User authorization failed on the SAP Mobile Server due to role constraints (applicable only for MBS).	N/A
404	Resource (table/Web service/BA-PI) not found on backend EIS.	Restore the EIS configuration.
405	Invalid license for the client (applicable only for MBS).	N/A
412	Backend EIS threw a constraint exception.	Delete the conflicting entry in the EIS.
500	SAP Mobile Platform internal error in modifying the CDB cache.	N/A

Error code 401 is not treated as a simple recoverable error. If the

SupThrowCredentialRequestOn401Error context variable is set to true (the default), error code 401 throws a CredentialRequestException, which sends a credential request notification to the user's inbox. You can change this behavior by modifying the value of the SupThrowCredentialRequestOn401Error context variable in SAP Control Center. If SupThrowCredentialRequestOn401Error is set to false, error code 401 is treated as a normal recoverable exception.

Mapping of EIS Codes to Logical HTTP Error Codes

A list of SAP® error codes mapped to HTTP error codes. By default, SAP error codes that are not listed map to HTTP error code 500.

Note: These JCO error codes are not applicable for DOE-based applications.

Table 8. Mapping of SAP Error Codes to HTTP Error Codes

Constant	Description	HTTP Error Code
JCO_ERROR_COMMUNICATION	Exception caused by net- work problems, such as connection breakdowns, gateway problems, or un- availability of the remote SAP system.	503
JCO_ERROR_LOGON_FAILURE	Authorization failures during login. Usually caused by unknown user name, wrong password, or invalid certificates.	401
JCO_ERROR_RESOURCE	Indicates that JCO has run out of resources such as connections in a connection pool.	503
JCO_ERROR_STATE_BUSY	The remote SAP system is busy. Try again later.	503

Client Object API Usage

Index

A	retrieve HTTP cookies 111 retrieve HTTP credentials 111
Afaria 15, 28, 125	retrieve HTTP headers 111
APNS 89, 91	retrieve login certificate 108
Apple gateway 196	retrieve login credentials 108
Apple Push Notification API 196	retrieve network protocol 107
Apple Push Notification Service 89, 91	retrieve port number 108
Application APIs	retrieve security configuration 109
**	retrieve server name 109
retrieve connection properties 103	
application callback handlers 194	retrieve URL suffix 110
application provisioning	COUNT 204
with iPhone mechanisms 89	create 52, 53
application registration 42	create operation 209
arbitrary find method 201, 202, 204, 207	createDatabase 219
ARC 19, 32	
AttributeTest 202, 207	D
AttributeTest condition 201	_
authentication	data synchronization protocol 3, 4
online 45	data vault 175
AVG 204	access group 188
	change password 186, 187
В	creating 173
_	deleting 176
beginOnlineLogin 147	exists 174
beginSynchronize 150	locked 182
	locking 182
С	retrieve data names 176
•	retrieve string 184
callback handlers 46, 191	retrieve value 185
CallbackHandler 77	set string 183
callbacks 45	set value 184
CertBlobUtility 127	unlocking 182
certificates 6, 26, 125, 133	database
ClassMetadata 230	client 219
client database 219	database connections
closeConnection 133	managing 133
complex type 51	debugging 77, 79
CompositeTest 207	delete 52, 53
CompositeTest condition 201	delete operation 210
concatenate queries 205	deleteDatabase 219
connection profile 43, 44	Disaster recovery 59
ConnectionProfile 133	documentation roadmap 4
ConnectionProperties 107	downloading Xcode IDE 6, 26
retrieve activation code 107	dynamic query 50

retrieve Farm ID 110

EIS error codes 237, 239 encryption key 172 entity states 213, 215 error codes	localization 87, 88 LogRecord API 161 LogRecordImpl 161, 166
EIS 237, 239 HTTP 237, 239 mapping of SAP error codes 239 non-recoverable 237 recoverable 237 EXCEPT 205 exceptions client-side 236 server-side 236	MAX 204 maxDbConnections 134 MBO 49–53 MBOLogger 77, 165 messaging protocol 3, 4 MetaData API 229 MIN 204 mobile middleware services 4
F	N
filtering results 205 FROM clause 206	newLogRecord 161 NoSuchAttributeException 236 NoSuchOperationException 236
G	0
generated code contents 13, 27 generated code, location 13, 27 getLogRecords 161 group by 205 H HeaderDoc 14, 28 High availability 59 HTTP error codes 237, 239	Object API code location of generated 13, 27 Object Manager API 229 object query 50, 200 ObjectNotFoundException 236 OnImportSuccess 147 onlineLogin 137 openConnection 133 other operation 211
infrastructure provisioning with iPhone mechanisms 89 INTERSECT 205 iPhone provisioning 89 J Javadocs, opening 95 JMSBridge 77	paging data 201, 204 password policy 181 set 177 pending operation 211 pending state 52 personalization keys 146 types 145 provisioning devices with iPhone mechanisms 89 push notifications 196
L	

listeners 45

SUPNoSuchOperationException.h 236
SUPNoSuchParameterException.h 236
SUPObjectNotFoundException.h 237
SUPPersistenceException.h 237
SUPQuery class 201
SUPQuery object 204
SUPQueryResultSet 208
SUPWrongDataTypeException.h 236
suspendSubscription 149
synchronization 47
MBO package 147
of MBOs 147
replication-based 147
simultaneous 147
synchronization parameters 49
synchronization profile 44
SynchronizationProfile 135, 136
SynchronizeException 236
-
Т
ı
TestCriteria 207
TestCriteria condition 201
resterra condition 201
U
UNION 205
UNION_ALL 205
unsubscribe 149
update 52, 53
update operation 210
V
•
value
deleting 186
-
v
X
X.509 certificates 6, 26
X.509 Certificates 6, 26 Xcode 15, 19, 28, 32
ACOUC 13, 17, 20, 32

Index